

Ultra-Small Ceramic

Power Splitter/Combiner

3 Way-0° 50Ω 1600 to 2800 MHz

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	15W* max.

* Derate linearly to 6W at 100°C ambient.

Pin Connections

SUMPORT	2
PORT 1	6
PORT 2	5
PORT 3	4
GROUND	1,3
PORT 1-2, 2-3	resistor external 124 OHMS
PORT 1-3	resistor external 127 OHMS

Outline Drawing

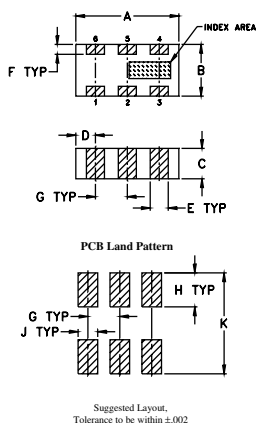


Outline Dimensions (inch mm)

A	B	C	D	E	F
.126	.063	.037	.024	.022	.012
3.20	1.60	0.94	0.61	0.56	0.30

G	H	J	K	wt
.039	.042	.024	.123	grams
0.99	1.07	0.61	3.12	.020

Demo Board MCL P/N: TB-303 Suggested PCB Layout (PL-171)

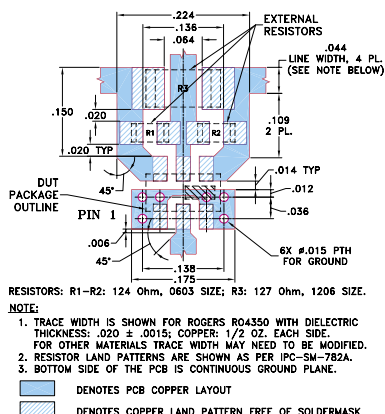

Features

- isolation resistors, external
- low insertion loss, 0.8 dB typ.
- excellent amplitude unbalance, 0.2 dB typ.
- very good phase unbalance, 5 deg. typ.
- high isolation, 12 dB typ.
- excellent power handling, 15W as splitter
- small size, 0.12"X0.06"X0.035"
- ESD non-sensitive
- temperature stable LTCC technology
- wrap around, terminations for excellent solderability
- low cost

Applications




- PSC, DECT
- DSS
- WLAN
- satellite communication
- line of sight communication
- ISM applications
- WLL
- defense applications

Splitter Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 4.8		PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)		RETURN LOSS (dB)	
	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	INPUT Typ.	OUTPUT Typ.
1600-2800	12	10	0.8	1.2	5	8	0.2	0.6	10	12
1800-2000	14	12	14	12	5	8	0.2	0.6	10	13
2000-2200	16	13	16	13	5	8	0.2	0.5	11	12
2400-2500	20	17	20	17	5	8	0.2	0.5	11	12

Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	Return Loss (dB)		
	S-1	S-2	S-3		1-2	1-3	2-3		S	1	2
1600.00	5.53	5.81	5.50	0.31	15.27	12.43	16.36	3.29	9.44	18.66	22.27
1700.00	5.50	5.78	5.48	0.29	16.66	13.09	17.87	3.64	9.73	17.30	22.33
1800.00	5.49	5.74	5.47	0.27	18.38	13.86	19.78	3.99	9.99	15.95	20.89
1900.00	5.48	5.71	5.47	0.24	20.57	14.75	22.29	4.31	10.23	14.71	19.12
2000.00	5.48	5.68	5.47	0.21	23.60	15.80	25.98	4.62	10.44	13.73	17.52
2100.00	5.48	5.66	5.48	0.18	28.40	17.05	32.67	4.79	10.63	12.94	16.11
2200.00	5.49	5.63	5.49	0.15	39.20	18.57	45.10	4.99	10.78	12.30	14.93
2300.00	5.49	5.62	5.50	0.12	33.16	20.43	29.60	5.06	10.95	11.85	14.05
2400.00	5.50	5.61	5.51	0.11	25.77	22.80	24.16	5.14	11.12	11.56	13.33
2500.00	5.50	5.60	5.52	0.09	21.75	25.66	20.80	5.14	11.30	11.41	12.83
2600.00	5.51	5.58	5.53	0.08	18.99	28.11	18.37	5.02	11.49	11.33	12.54
2700.00	5.50	5.59	5.54	0.08	16.91	27.40	16.50	4.88	11.65	11.46	12.34
2800.00	5.51	5.60	5.55	0.09	15.25	24.44	14.98	4.68	11.79	11.72	12.35

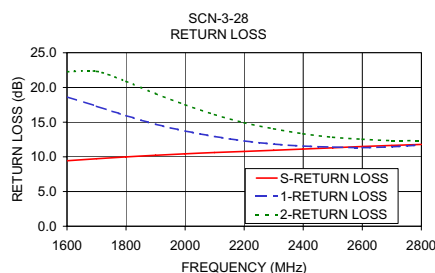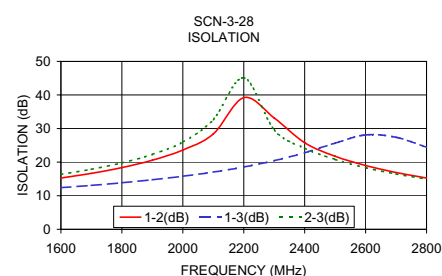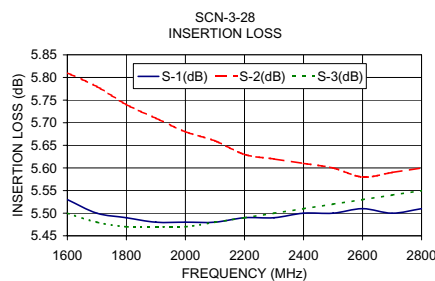

electrical schematic



CASE STYLE: FV1206-1

PRICE: \$3.95 ea. QTY. (10-49)

\$3.25 ea. QTY. (100)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Mini-Circuits®

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>



REV. A
M98898
ED-11736/5
SCN-3-28
AD/DJ/CP/AM
060905