

Surface Mount Directional Coupler

75Ω

10 to 1000 MHz

TCD-18-4-75+
TCD-18-4-75




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C


Pin Connections

INPUT	3
OUTPUT	4
COUPLED	1
GROUND	2
75Ω TERM EXTERNAL	6
NOT USED	5

Outline Drawing

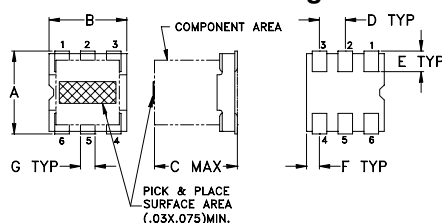


PCB Land Pattern



Outline Dimensions (inch/mm)

A	B	C	D	E	F	
.160	.150	.160	.050	.040	.025	
4.06	3.81	4.06	1.27	1.02	0.64	
G	H	J	K			wt
.028	.065	.190	.030			grams
0.71	1.65	4.83	0.76			0.15

Demo Board MCL P/N: TB-72 Suggested PCB Layout (PL-010)

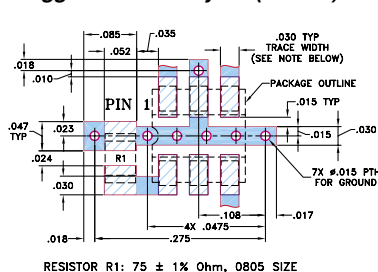

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wideband, 10 to 1000 MHz
- low insertion loss, 0.7 dB typ.
- aqueous washable
- leads for excellent solderability
- protected by US Patent 6,140,887

Applications

- VHF/UHF
- CATV
- cellular

CASE STYLE: DB714
PRICE: \$1.49 ea. QTY (25)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.

Directional Coupler Electrical Specifications




FREQ. RANGE (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)						DIRECTIVITY (dB)						VSWR (:1)	POWER INPUT, W	
			L		M		U		L		M		U			L	MU
	f _L -f _U	Norm.	Flatness	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.		
10-1000	18.0±0.5	±0.9	0.9	1.3	0.7	1.2	0.8	1.3	20	15	22	15	18	—	1.20	1.0	1.0

L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]


1. Mainline loss includes theoretical power loss at coupled port.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	In	Return Loss (dB) Out	Cpl
10.00	0.80	18.25	24.89	19.65	21.19	19.31
30.00	0.75	18.09	28.81	21.21	23.47	21.05
50.00	0.75	18.07	29.10	21.46	23.88	21.36
90.00	0.75	18.05	28.90	21.60	23.98	21.20
100.00	0.75	18.05	28.77	21.62	23.96	21.20
300.00	0.73	18.00	25.91	21.12	23.00	22.63
500.00	0.75	17.87	23.32	20.19	21.20	25.64
700.00	0.75	17.64	21.87	20.17	20.48	28.73
900.00	0.79	17.44	21.22	21.04	20.47	32.11
1000.00	0.81	17.34	21.19	21.96	20.60	31.73

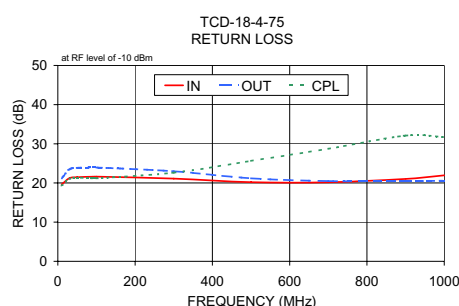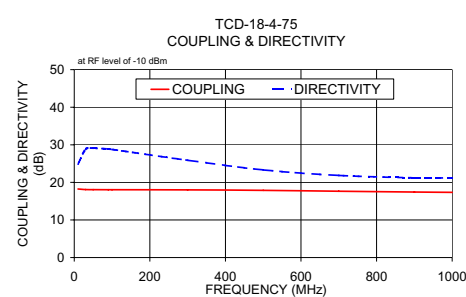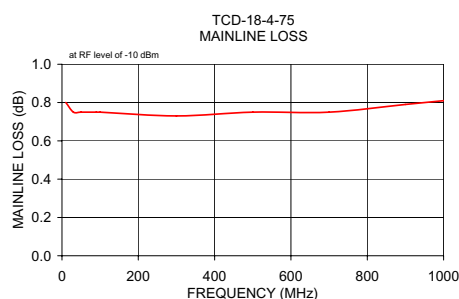

electrical schematic



Mini-Circuits®

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>



REV. E
M102713
ED-8563/1
TCD-18-4-75
WZ/TD/CP
060725