

Plug-In Directional Coupler

50Ω

5 to 1000 MHz

TDC-10-2+
TDC-10-2




Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

Pin Connections

INPUT	1
OUTPUT	2
COUPLED	4
GROUND	3
CASE GROUND	3

Outline Drawing

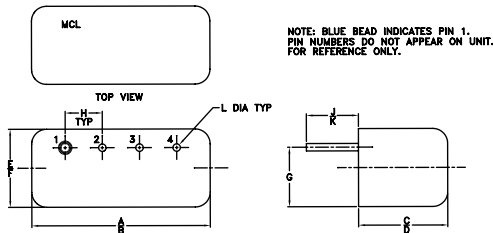

Outline Dimensions (inch mm)

A	B	C	D	E	F
.480	.500	.240	.255	.210	.230
12.19	12.70	6.10	6.48	5.33	5.84
G	H	J	K	L	wt
.16	.100	.14	.20	.020	grams
4.06	2.54	3.56	5.08	0.51	1.9

Features

- wideband, 5 to 1000 MHz
- excellent directivity, 25 dB typ.
- rugged welded case, hermetically sealed

Applications

- VHF/UHF
- instrumentation
- communication receivers & transmitters

CASE STYLE: B02

PRICE: \$28.20 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Directional Coupler Electrical Specifications




FREQ. RANGE (MHz)	COUPLING (dB)		MAINLINE LOSS¹ (dB)						DIRECTIVITY (dB)						VSWR (:1)	POWER INPUT, W	
			L		M		U		L		M		U				
	f _L -f _U	Nom.	Flatness	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.
5-1000	11.0±0.5	±0.6	1.4	1.8	1.5	1.8	1.6	2.0	50	35	25	20	20	15	1.5	0.5	0.5

L = low range [f_L to $10 f_L$] M = mid range [$10 f_L$ to $f_U/2$] U = upper range [$f_U/2$ to f_U]

1. Mainline loss includes theoretical power loss at coupled port.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
5.00	1.54	11.12	46.98	22.70	15.85	15.65
10.00	1.46	11.07	46.73	23.89	16.30	16.03
20.00	1.48	11.07	46.28	24.86	16.48	16.22
50.00	1.49	11.09	44.93	25.17	16.57	16.32
100.00	1.52	11.13	42.76	25.29	16.72	16.38
200.00	1.59	11.25	37.70	25.93	16.98	16.31
500.00	1.56	11.29	27.82	22.47	17.33	14.79
557.11	1.61	11.38	26.63	21.79	17.30	14.37
972.94	1.72	11.67	18.90	17.81	17.20	12.01
1000.00	1.76	11.75	18.62	17.57	17.20	11.89

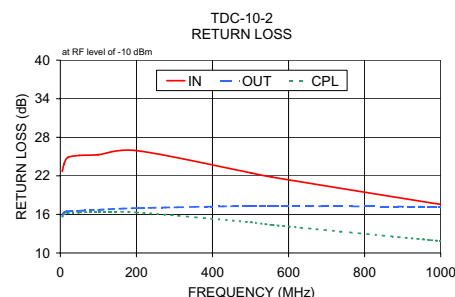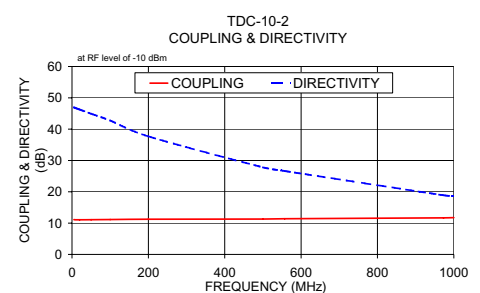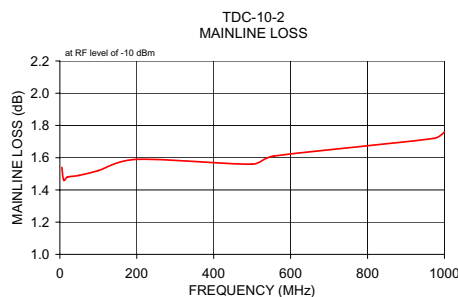

electrical schematic

