

Coaxial

Low Pass Filter

DC to 490MHz

NEW!

VLF-490

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Power Input 8.5W max. at 25°C

DC Current Input to Output 0.5A max. at 25°C


*Passband rating, derate linearly to 3.5W at 100°C ambient.

Features

- low cost
- small size
- 7 sections
- temperature stable
- patent pending

Applications


- harmonic rejection
- transmitters/receivers
- lab use



CASE STYLE: FF704

PRICE: \$19.95 ea. QTY (10-24)

Outline Drawing

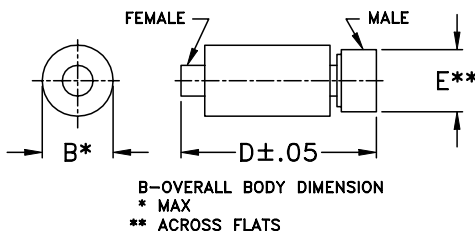


Outline Dimensions (inch/mm)

B	D	E	wt.
.410	1.43	.312	grams
10.41	36.32	7.92	10.0

Low Pass Filter Electrical Specifications (T_{AMB}=25°C)

MODEL NO.	PASSBAND (MHz) (loss < 1 dB) Max.	fco, MHz Nom. (loss 3 dB) Typ.	STOP BAND (MHz) (loss, dB)			VSWR (:1)		NO. OF SECTIONS
			f 20 Min.	40 Typ.	fr 20 Typ.	Stopband Typ.	Passband Typ.	
LFCN-490	DC-490	650	780	880-2500	6000	20	1.2	7

typical frequency response



schematic



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1.00	0.05	1.01
100.00	0.22	1.05
250.00	0.39	1.02
500.00	0.86	1.07
600.00	1.52	1.45
650.00	2.37	1.85
700.00	5.08	3.10
780.00	27.49	12.99
880.00	44.92	19.76
1000.00	41.68	25.94
2500.00	75.47	51.10
3500.00	38.94	51.10
4500.00	36.38	30.49
5500.00	20.80	24.14
6000.00	21.07	22.00

