


### FEATURES

- 2 simultaneous analog outputs up to 10MHz
- Sample update rates to 40MHz
- High-resolution frequency synthesized clock
- Software programmable offset and gain
- 8 software selectable low-pass filters per channel
- Stores up to 32k 12-bit waveform points per channel
- External clock, trigger, and gate inputs
- Waveform repetition up to 256 or continuously
- TTL level synchronization output
- Comprehensive Windows graphic software with powerful equation resolver

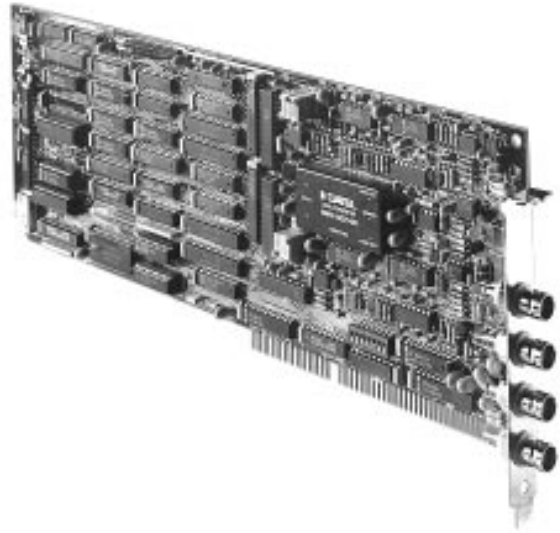

### GENERAL DESCRIPTION

The PC-420 is a high-speed, highly precise, arbitrary waveform generator board for IBM-PC/AT, PS-30, EISA bus and compatible computers. If your application requires simplicity without sacrificing performance, the PC-420 analog signal generator board offers two high-performance output channels for generating complex periodic and aperiodic analog signals simultaneously.

Unlike non-buffered analog output boards, the PC-420 combines versatility and programmability with high-resolution, variable gain and phase, local data buffering and software selectable filters to result in an effective, easy-to-use solution for waveform synthesis requirements. Using PC-420GEN waveform definition software, you can quickly produce any conceivable waveform.

The PC-420 uses digital synthesis to generate the analog output signals. Waveform pattern data for generating

arbitrary functions (as well as sine, square, triangle and ramp outputs) is loaded from the host computer into waveform RAM on each channel. The waveform repeat depth is programmable from 2 to 32k samples and data scans can loop up to 256 times or forever. A fixed-frequency reference clock drives a Phase Locked Loop (PLL) to minimize phase jitter, transient response, and resolution problems inherent in earlier synthesizer designs.

Waveform sample points are clocked from the local buffers to a high-speed, 12-bit digital-to-analog converter stage at rates up to 40MHz. A stable internal 20MHz crystal oscillator ensures low output noise and controls waveform synthesis

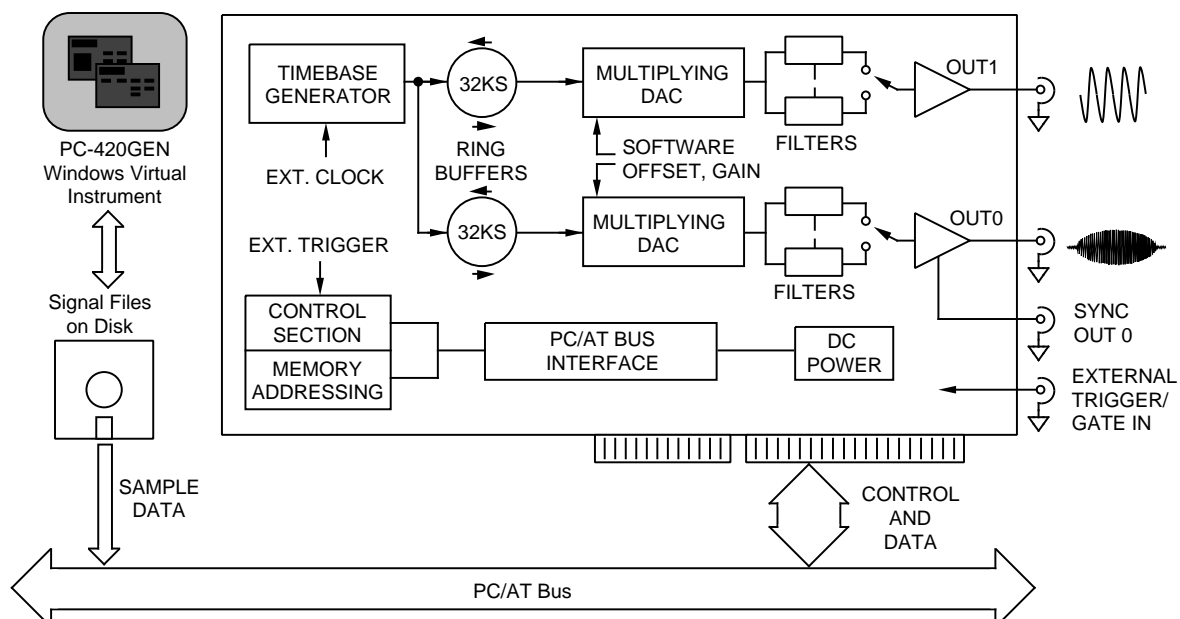


Figure 1. PC-420 Block Diagram

**GENERAL DESCRIPTION (Continued)**

by generating a 40MHz digitally synthesized sample clock source. An external trigger input synchronizes waveform scanning with your application. An external TTL "gate" input enables/disables the output channels. The sample clock can be supplied from an external source.

The PC-420 generates outputs at up to 10MHz with a frequency resolution of 0.012% and  $\pm 0.012\%$  frequency accuracy. The signal amplitude range is 20V peak to peak for squarewaves. The resolution is 0.05% of full scale at 0.1% accuracy for sine wave outputs. For non-squarewaves, the output amplitude decreases as the frequency increases. Two 12-bit DAC's allow you to vary the offset and gain of the synthesized waveforms. The offset is adjustable from plus to minus full scale ( $\pm 10V$ ) with a 0.05% resolution while the gain is variable from  $\pm 10mV$  to  $\pm 10V$ .

Software selectable, fixed-frequency low pass anti-alias filters on each output channel ensure high spectral purity. Seven third order Butterworth low pass filters with a range of fixed cutoff frequencies from 10kHz to 10MHz (at the 3dB points), ensure proper waveform reconstruction and anti-aliasing and minimize harmonic distortion. In addition, each channel has a 20MHz low pass filter to eliminate high frequency system noise components from the output signals.

Software flexibility allows you to produce frequency, amplitude, phase, and burst modulated signals as well as linear and logarithmic frequency sweeps. Synthesized waveforms display the low phase noise and drift inherent to digital synthesis techniques. Wideband output amplifiers minimize distortion and exhibit excellent pulse response characteristics.

The PC-420 is configured on a full size PC/AT bus card that is fully contained within the host computer. Waveform and TTL level sync outputs as well as clock/trigger inputs are available on four BNC connectors mounted on the rear panel. A dual row, header connector contains 16-bit digital pattern data from channel 0. This is ideal for generating digital signals for TTL circuit test. The board is compatible with most popular programming languages and all register data is right-justified to facilitate integer data typing with high level languages such as C, FORTRAN, PASCAL, BASIC, etc. A comprehensive Users Manual is supplied with the board which details full installation, programming, and application information.

PC-420GEN - Waveform definition and generation software for Windows'.

**Easy to use instrument panel**

It is easy to use the PC-420 as a benchtop instrument using DATEL's PC-420GEN waveform generation software. PC-420GEN runs under Microsoft Windows 3.1 (or higher) and simulates a waveform generator instrument panel including numeric keypad, switches, slide bars, dials, buttons, etc. Although all selections can be easily made using a mouse, numbers and text may be entered from the keyboard. It is simple to use and requires *no* low level programming by the user. A TTL level "sync" output indicates 0V crossing on channel 0 - allowing you to phase synchronize scanning with your external hardware.

**Select or create any waveform**

You can select from a repertoire of standard sine, cosine, square, triangle and sawtooth waves. You can generate noise and add it to the waveform - ideal for communications circuit testing and determining the performance bounds of a system.

**Equation resolver, disk files**

A powerful equation parser allows high speed formulation of any complex mathematical function. Upload previously created data files for regeneration by the PC-420. Waveforms may be displayed on screen before scanning and also during wave generation. The present hardware configuration can be viewed, edited, and saved to a data file for use later.

**Generate waveform**

Select the clock and trigger sources. Specify the frequency, amplitude, offset, and phase of the output signals. Choose from one of seven reconstruction filters for each of the two output channels. Start waveform generation on a single output channel or on both channels simultaneously.

**Multitasking**

After creating a waveform and configuring the hardware you may Close the instrument panel screens and execute other applications software in the Windows environment. The predefined waveforms continue to be generated at each output channel by the PC-420, i.e. PC-420GEN continues to execute in the background. This is ideal for running long, dynamic test sequences while the host computer concurrently carries out other tasks. Simply *Exit* PC-420GEN when the application is complete.


**Hardware test, on-line HELP**

Rigorous test procedures are built in to confirm proper hardware operation. Channel calibration routines are also available. A comprehensive on-line HELP engine may be invoked at any time should you have any questions related to the combined PC-420 hardware/software system.


**Develop custom software**

The PC-420 includes a low-level device driver library, written in C and supplied on 5.25" MS-DOS diskettes. These routines may be incorporated into user programs and used for configuring and controlling PC-420 operation.

Experienced programmers may obtain the complete source code listing for PC-420GEN (PC-420SRC) so they can customize it for their own applications. All hardware drivers are written in Borland C v3.1 under Microsoft Windows. The user interface is accomplished using Visual BASIC Professional. The Users Manual contains detailed register and timing information as well as example software routines to help users develop their own code.

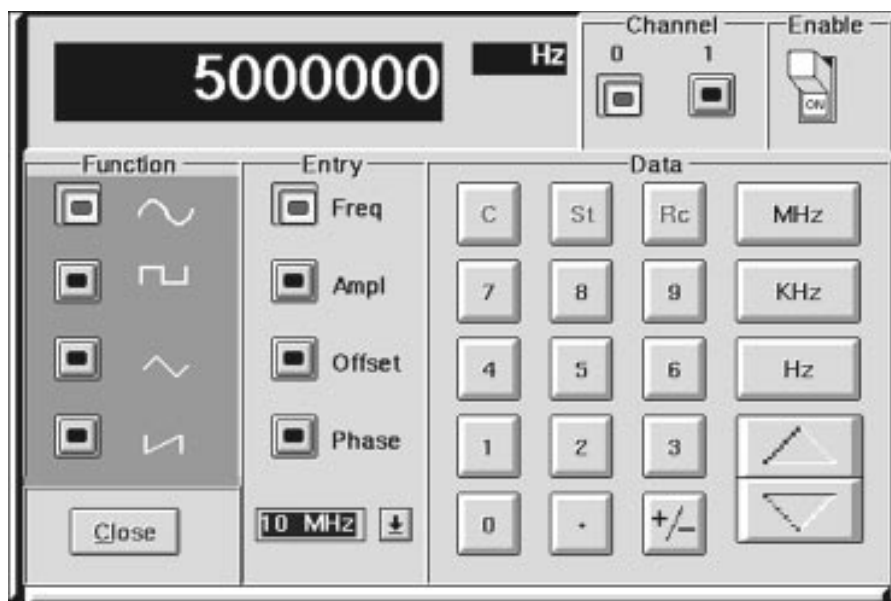

**PC-420GEN Standard Waveform Panel.** Select a sine, square, triangle, or sawtooth wave; specify frequency amplitude, offset and phase of the signal. Enter all data at the keypad as though it were a real instrument. Specify the reconstruction filter for each channel and turn the instrument *ON* to generate the waveform. Close when done, and the generated signals remain on the output channels.

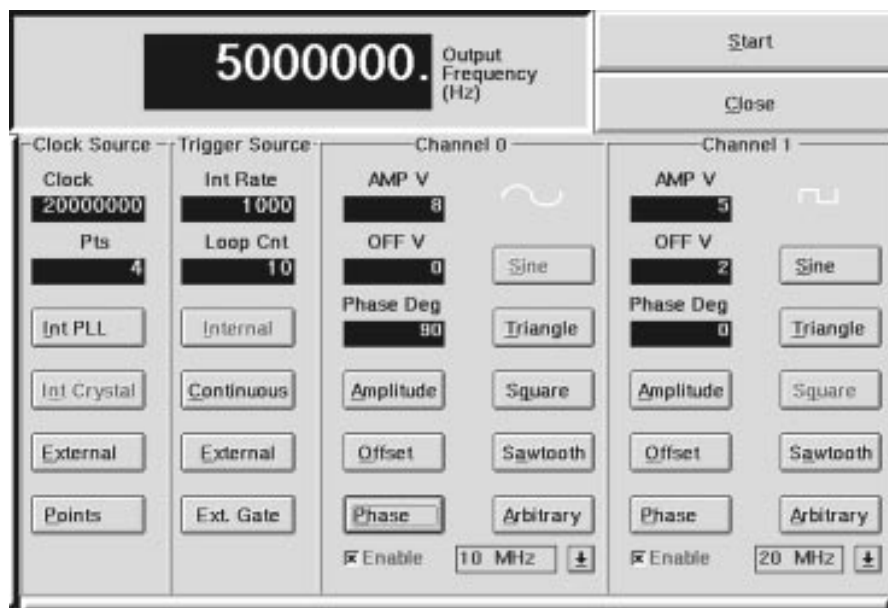

**PC-420GEN Arbitrary Waveform Panel.** Select the clock source, trigger sources and sample scan loop count. Enter the arbitrary waveform file name, load it into PC-420 waveform RAM. Specify amplitude, offset, and phase of each output waveform. Select filter and start single or dual channel scanning. *Close* when done, and the generated signals remain on the output channels.

## FUNCTIONAL SPECIFICATIONS

(Typical at +25°C, dynamic conditions, unless noted)

WAVEFORM OUTPUTS		
Number of Channels	2, non-isolated	
Amplitude	±10V	
Output Impedance	50Ω	
Update Rate	40MHz, maximum	
Offset Adjust	12-bit unipolar DAC, adjustable from plus to minus full scale	
Gain Adjust	12-bit unipolar DAC	
Output Protection	Short circuit protection to ground	
Output Bandwidth		
Waveform	Max Freq.	Resolution
Sine	10MHz	0.012%
Square	10MHz	0.012%
Ramp	100kHz	0.012%
Triangle	100kHz	0.012%
OUTPUT PERFORMANCE		
Frequency Range	2.3 x 10 <sup>-3</sup> Hz to 10MHz	
Frequency Accuracy	±0.012%	
Amplitude Accuracy	±0.25% of FSR	
Loop Lock Up Time	250ms	
Amplitude Range	+10mV to +20Vpp	
Amplitude Resolution	0.05% of full scale (12-bit DAC)	
Maximum Offset	±10V	
Offset Resolution	0.05% of full scale	
Sync. Output	TTL levels into 50W, on channel 0 only, active high	
TTL Output Rise/Fall Time	5 nanoseconds	
Gain/Offset DAC Settling Time	15 microseconds	
ANALOG FILTERS (EACH CHANNEL)		
Number of Filters	7 selectable, 1 fixed (20MHz)	
Cutoff Frequency	10MHz, 5MHz, 1MHz	
(-3dB down)	500kHz, 100kHz, 50kHz, 10kHz	
Selection	Software programmable	
Filter Type	3rd order Butterworth active filters 10, 50, 100 and 500kHz. 3rd order Butterworth passive filters 1, 5, 10, and 20MHz.	
WAVEFORM CLOCK		
Clock Sources	Internal or external, 40MHz max.	
Internal Clock	Frequency synthesizer or 20MHz crystal clock	
Accuracy	±50ppm (+20 to +30°C)	
Aging	±5ppm/year	
WAVEFORM MEMORY		
Architecture	High-speed, static RAM (SRAM)	
Memory Capacity	32,768k x 16 waveform samples per channel	
Operating mode	1. Free run 2. Internal software programmable triggered 3. External trigger - TTL 4. External gate - TTL	

PC/AT BUS INTERFACE	
<b>Architecture</b>	I/O mapped, pluggable to IBM-PC/AT, PS-30, EISA bus and compatibles. Decodes eight 16-bit I/O registers.
<b>I/O Mapping</b>	Decodes I/O address lines A9 through A4. A3...A0 are decoded for individual register access. Highest base address is 3F0 hex.
<b>Data Bus</b>	16-bit I/O transfers; all data is right justified, offset binary, sign-extended.
<b>Control/Status Function</b>	Board reset, clock and trigger select, timer control, filter select, offset/gain DAC loading, frequency synthesizer control, memory select and load.
SQUARE WAVE	
<b>Rise/Fall Time</b>	<10ns (10% to 90%)
<b>Asymmetry</b>	<2%, ±30ns (with 50Ω termination)
<b>Overshoot</b>	<5% at full scale output (to 10MHz)
RAMP, TRIANGLE AND ARBITRARY WAVEFORMS	
<b>Rise/Fall Time</b>	40ns with 50Ω termination
<b>Linearity</b>	±0.1% of full scale output
ARBITRARY WAVEFORMS	
<b>Sample Rate</b>	40MHz
<b>Waveform Length</b>	4 to 32,768 points
<b>Vertical Resolution</b>	12 bits (0.025% of full scale)
CONNECTORS	
<b>Signal Connectors</b>	4 BNC type connectors on rear panel
<b>BNC1</b>	Output 0
<b>BNC2</b>	Sync out 0
<b>BNC3</b>	Output 1
<b>BNC4</b>	External trigger/clock inputs (TTL compatible, 50Ω terminal, jumper selectable)
<b>Digital Pattern Connector</b>	26-pin dual-row header connector mounted internally. Contains 16-bit digital data from channel 0. Strobe signal included for clocking data to external receivers.
MISCELLANEOUS	
<b>Power Requirements</b>	PC/AT bus +5V 1.6A typical, 2.0A maximum PC/AT bus +12V 0.3A typical, 0.4A maximum PC/AT bus -12V 0.3A typical, 0.4A maximum
<b>Operating Temp. Range</b>	0 to +60°C
<b>Storage Temp. Range</b>	-25 to +80°C
<b>Relative Humidity</b>	10% to 90%, non-condensing
<b>Altitude</b>	0 to 10,000 feet (0 to 3047m)
<b>Outline Dimensions</b>	4.5"H x 13.31"L x 0.5"W (11.43 x 33.81 x 1.59cm), Full size PC/AT board. Uses a single PC/AT slot.
<b>Weight</b>	14oz. (0.42kg)

## FREQUENCY DOMAIN PERFORMANCE (Typical)

Note: Readings are based on visual interpretation of a graphic FFT display. Results will vary depending on FFT algorithm, screen resolution, and spectrum analyzer performance.

**Table 1. Frequency Response - No External Filter**

PC420 Output Frequency	PC420 Filter Frequency	Noise Floor	2nd Harmonic	3rd Harmonic
10kHz	10kHz	-90dB	-75dB	-83dB
50kHz	50kHz	-80dB	-72dB	-78dB
100kHz	100kHz	-90dB	-66dB	-73dB
500kHz	500kHz	-85dB	-60dB	-70dB
1MHz	1MHz	-83dB	-55dB	-69dB
5MHz*	5MHz	-80dB	-50dB	-58dB
10MHz*	10MHz	-80dB	-45dB	-54dB


Note: Load impedance = 1M $\Omega$ , internal filter enabled

\*Load impedance = 50 $\Omega$ , internal filter enabled


**Table 2. Frequency Response - External Bandpass Filter  
Frequency = PC-420 Output Frequency**

PC-420 Output Frequency	PC-420 Filter Frequency	Noise Floor	2nd Harmonic	3rd Harmonic
98kHz	100kHz	-90dB	-85dB	-83dB
480kHz	500kHz	-88dB	-88dB	-85dB
975kHz	1MHz	-88dB	-82dB	-80dB
2.45MHz	5MHz	-83dB	-82dB	-80dB

Note: Load impedance = 50 $\Omega$ , internal filter enabled.

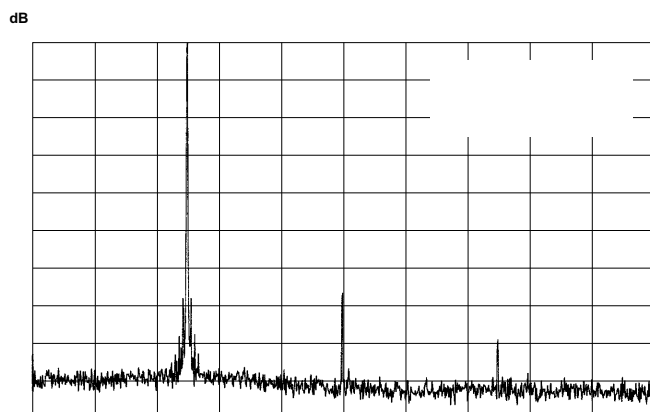

No external filter

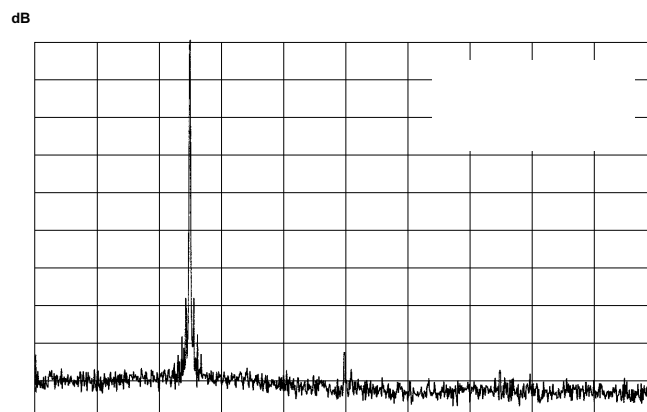

External bandpass filter (center frequency = 100kHz)

**Figure 2. PC-420 FFT Plots (sinewave inputs)**

## OUTPUT AMPLITUDE CONSIDERATIONS

All readings taken into a 1M $\Omega$  load with the 20MHz fixed internal filter. If a 50 $\Omega$  load is connected the output amplitudes will attenuate by half.

For signal frequencies up to 1MHz the output amplitude depends on the filter cutoff frequency. Table 3 reflects the output levels when the filter frequency equals the signal frequency, i.e. the full scale amplitude ( $\pm 10V$ ) is decreased by 3dB. Selecting a filter frequency higher than the output frequency will result in less attenuation but signal reconstruction quality will suffer. Above 1MHz the output amplifier's finite bandwidth also attenuates the output signal.

Conclusion: Waveform amplitude and signal quality depends on output frequency and filter selection.

**Table 3. Output Amplitude vs. Filter Selection**

Output Frequency Filter Frequency	Amplitude (without filter)	Amplitude (with filter)
10kHz	$\pm 10V$	$\pm 7V$
50kHz	$\pm 10V$	$\pm 7V$
100kHz	$\pm 10V$	$\pm 7V$
500kHz	$\pm 10V$	$\pm 7V$
1MHz	$\pm 10V$	$\pm 7V$
5MHz	N/A	$\pm 5V$
10MHz	N/A	$\pm 5V$

## I/O REGISTER MAP

(Refer to the PC-420 User's Manual for detailed programming information and register bit fields.)

The PC-420 appears to the host computer as a set of I/O registers. The BASE address is switch selectable and can be located anywhere up to 3F0 hex on 16-byte boundaries. This allows installing multiple boards in the same host at the same time. Each individual I/O register is located at a fixed offset from this BASE as shown in Table 4.

Table 4. PC-420 I/O Register Map

I/O Address (hex)	Direction	Description
BASE + 0	Write	Command Register
BASE + 0	Read	Status Register
BASE + 2	Write	Start Address Register
BASE + 2	Write	Final Address Register
BASE + 4	Write/read	Memory Data Register
BASE + 6	Write	Frequency Synthesizer Register
BASE + 8	Write	Filter Selection Register
BASE + 8	Write	Loop Count Register
BASE + A	Write/read	Offset DAC Register
BASE + C	Write/read	Gain DAC Register
BASE + E	Write/read	Programmable Timer Register

At power up or PC bus reset, both output channels are set to 0V. All register data is right justified and 16-bit I/O word instructions must be used to access each register. The registers may be programmed in any sequence as long as the Command Register bits that enable the outputs are written last.

## REGISTER DESCRIPTIONS

### COMMAND REGISTER (Write BASE + 0)

This is a 16-bit wide register that controls PC-420 programming and controls operation. It allows host software to specify other local hardware registers for programming or for reading status information. These include the filter register selection, offset and gain DAC selection, 82C54 timer, and memory register selections. It also specifies the clock and trigger sources, i.e., internal or external. When ready to start generating waveforms from local RAM, the Command Register enables the output channels - individually or simultaneously.

### STATUS REGISTER (Read BASE+ 0)

The Status Register resides at the same I/O address location as the Command Register but it displays a different bit representation. It is read only and it reports the output channel level (with respect to 0V) and echoes the status of the phase locked loop section.

### START ADDRESS REGISTER (Write BASE + 2)

This register must be loaded with the start address in waveform RAM for a data scan. It also doubles as the present RAM address when loading signal files from disk. It is selected by the Command Register. Local hardware on the PC-420 compares the start (present) and final register contents during a scan and restarts the waveform scan when equal. The loop count is programmable up to 256 by writing the Loop Count Register at BASE + 8. Continuous mode is selected in the

Command Register.

### FINAL ADDRESS REGISTER (Write BASE + 2)

This is selected by the Command Register. It contains the final RAM address when scanning data to the output DAC's. When the present address is equal to this final address, the local memory pointer circulates back to the start address and the scan repeats. The number of times is specified in the Loop Count. Continuous mode is selected in the Command Register

### MEMORY DATA REGISTER (Read/Write BASE + 4)

12 bit waveform data is loaded to local PC-420 RAM through this register. The address is placed using the Start Address Register as a current address. The memory bank being accessed is selected by the Command Register. All data is right justified, raw binary data with offset binary coding to allow for bipolar output waveforms.

### FREQUENCY SYNTHESIZER REGISTER (Write BASE + 6)

Data for programming the frequency synthesizer counters is written to the lower 4 bits of this register. The upper 12 bits are not used. Individual counters are selected for access in the Command Register.

### FILTER SELECTION REGISTER (Write BASE + 8)

This register selects one of seven output filters for each channel. For squarewaves the output frequency and filter selection does not effect the amplitude. However, the maximum amplitude of all waveforms varies depending on frequency and filter selections. Consult the PC-420 User Manual for details. The Filter Selection Register also enables the digital pattern output normally disabled to minimize system noise.

### LOOP COUNT REGISTER (Write BASE + 8)

This 8-bit register is selected by the Command Register and it specifies the number of times to loop in local RAM when scanning data to the DAC's (up to 256). Continuous scanning is selected by the Command Register.

### OFFSET DAC REGISTER (Write BASE + A)

This 12 bit write only register sets the output signal offset. All data is right justified, offset binary coding for bipolar selections. The upper 4 bits in the register are not used. The offset is selectable within a range of  $\pm 10V$ .

### GAIN DAC REGISTER (Write BASE + C)

The output signal gain data is written to this register. All data is right justified 12-bit data, offset binary coding for bipolar gain selections. The upper 4 bits are not used. The gain is selectable within a range of  $\pm 10V$ .

### PROGRAMMABLETIMER REGISTER (Read/Write BASE + E)

The 82C54 programmable timer sets the internal trigger rate and the DAC clock rate (based on a 10MHz oscillator input). It is a byte-wide (8-bit) register that contains one Control Register and three data registers - one for each of three 16-bit counters. Access to a particular internal register is specified in

the Command Register. Detailed programming and timing information is available in the PC-420 User's Manual.

## PROGRAMMING SEQUENCE

PC-420GEN provides all the waveform creation, upload, and generation facilities without any low level programming by the user. However, custom applications may require some software development - either modification of PC-420SRC or complete hardware coding. The low level driver library supplied with PC-420 will be very helpful when writing code.

The following flow diagram illustrates PC-420 programming strategy. Complete programming details and example code listings are in the PC-420 User's Manual.

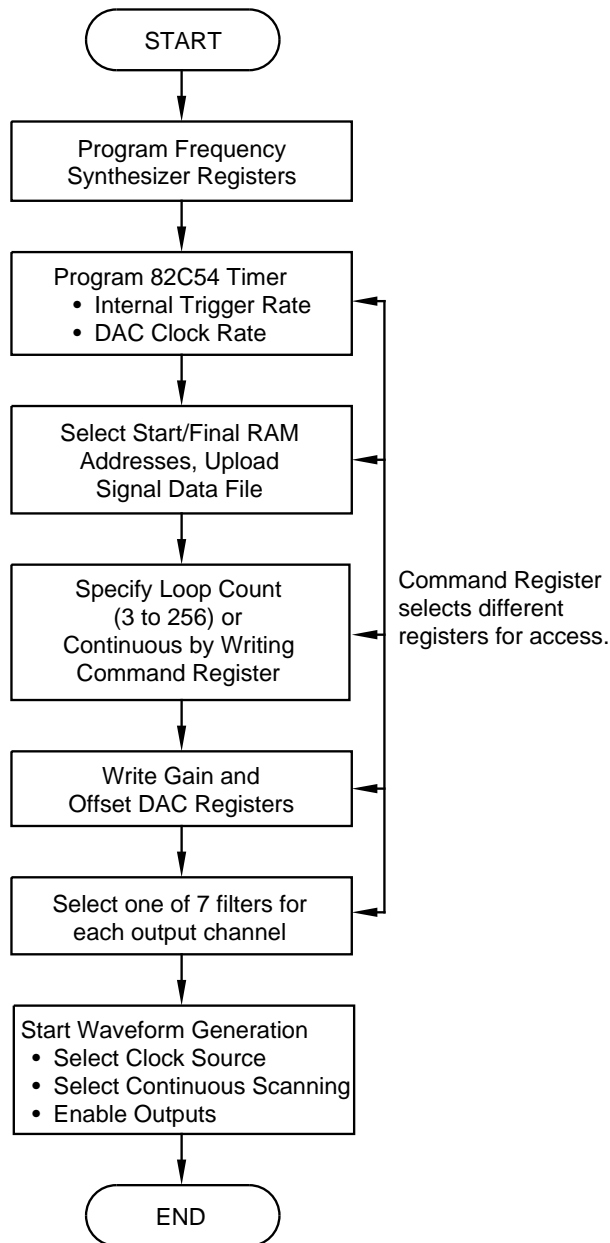


Figure 2. PC-420 Programming Flow Chart

Note: Waveform data must be uploaded from disk file to PC-420 RAM before starting generation. Data cannot be uploaded from disk while DAC's are clocking.

## SIGNAL DATA FILES

Waveform data must be loaded from disk file to local RAM on each PC-420 channel before scanning. All data must be 12 bits wide, right justified raw binary data with offset binary coding to allow for bipolar output ranges. It may be created mathematically by host software or generated by an AID board e.g., DATEL's PC-414 fast analog input board.

The file can be uploaded to the PC-420 RAM using most high level programming languages that can do I/O accesses, e.g. "C", BASIC, FORTRAN, etc. This is done through the Memory Data Register at BASE + 4. Individual addresses are specified in the Start Address Register at BASE + 0Ah. No hardware configuration header information can be included unless host software strips it from the signal data before loading. Scan modes and scan rates can be programmed directly by host software.

Note: PC-420GEN contains a powerful equation parser that will resolve and evaluate any complex waveform equation entered by the user. The parser will then generate the appropriate data file. PC-420GEN uploads this data file to local waveform RAM and generates the desired waveform. A waveform plotting utility in PC-420GEN allows you to confirm proper signals before scanning.

The PC-420 waveform RAM repeat depth is programmable from 4 to 32,768 samples by setting the Start and Final memory addresses. Data scanning can loop on this up to 256 times or continuously - a non-stop "forever" mode. The loop count is programmable via the Loop Count Register at BASE+ 8. Continuous mode is selected in the Command Register.

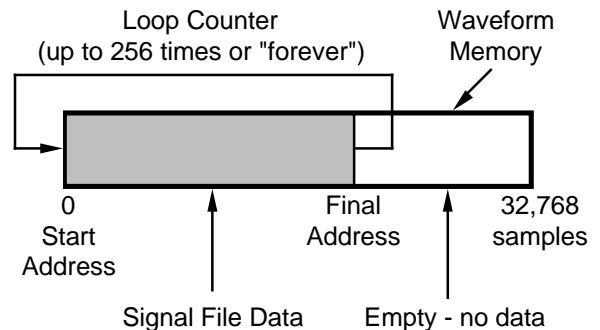


Figure 3. PC-420 Waveform Buffer Scanning

One period of a waveform only needs to be loaded to PC-420 RAM. By looping on this, a continuous waveform may be generated. Be aware that concatenated data files and truncated waveforms can be discontinuous at their boundaries - resulting in glitches in the output signals. A graphic waveform editor is the ideal solution to smoothing such files *before* loading them to the PC-420.

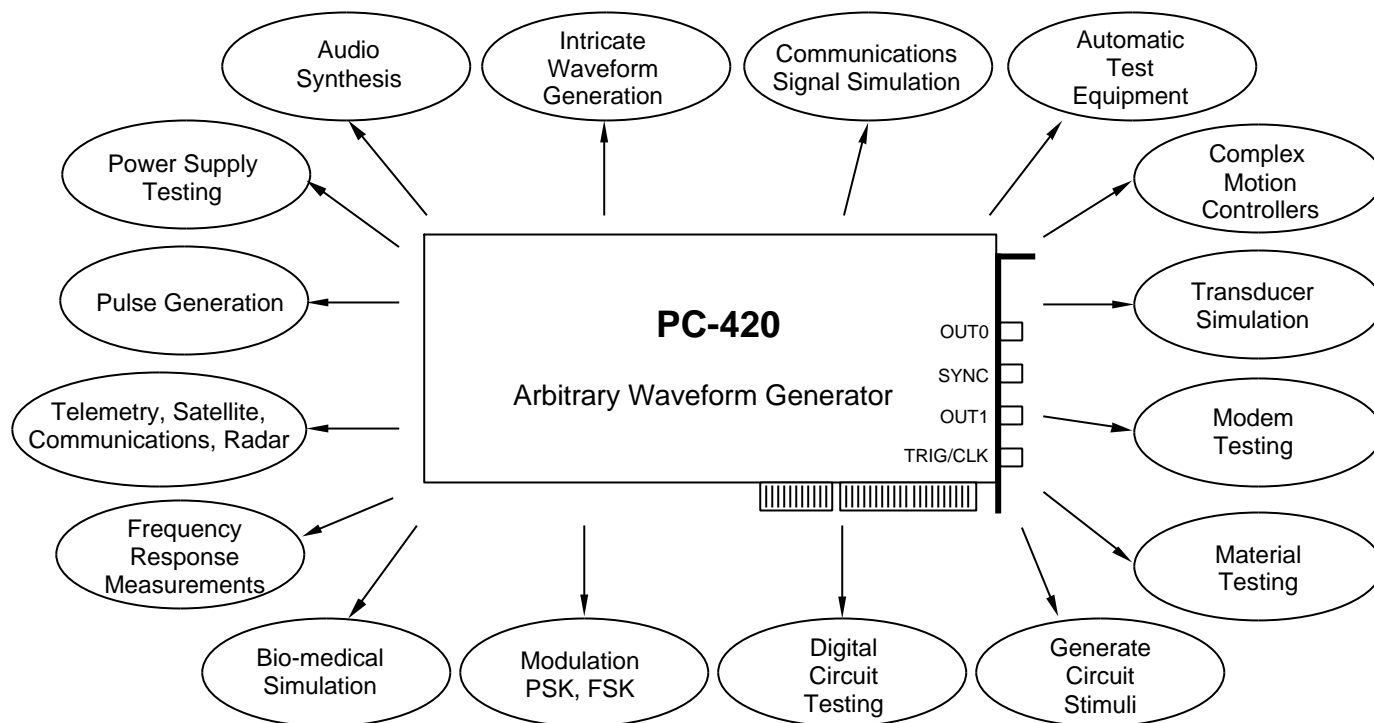


Figure 4. PC-420 Applications

## ORDERING INFORMATION

Model	Description
PC-420	Arbitrary waveform generator board. Includes a comprehensive user manual and low level device driver library on MS-DOS diskettes.
PC-420GEN (HD)	Waveform definition/generation software utility, written under Microsoft Windows 3.1 (or higher). This package includes the executable and library files on 3.5" MS-DOS diskettes.
PC-420SRC	Complete source code listing for PC-420GEN. Supplied on 3.5" (HD) MS-DOS diskettes. All code written in Borland C v3.1 and Visual BASIC Professional under Microsoft Windows. (Note: You must compile with Visual BASIC <i>Professional</i> .)
PC-420LV	Bridge driver software to National Instruments' LabVIEW®. See PC-420LV data sheet.
PC-420DRV	Low level source code driver library, included with board.

IBM-PC/AT is an IBM Corporation trademark.  
Windows is a Microsoft Corporation trademark.  
LabVIEW is a National Instruments trademark.