

Coaxial

Low Pass Filter

DC to 1050 MHz (40 dB Isolation up to 20 GHz)

NEW!**VLFX-1050**

Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Power Input* 10W max. at 25°C

*Passband rating, derate linearly to 3.5W at 100°C ambient.

Features

- very good isolation, 40 dB up to 20 GHz
- 21 sections
- temperature stable LTCC internal structure
- patent pending
- re-entry frequency > 20 GHz
- rugged stainless steel unibody


Applications

- harmonic rejection
- transmitters/receivers
- lab use
- test instrumentation



CASE STYLE: FF1118
PRICE: \$ 39.95 ea. QTY (1-9)


Outline Drawing

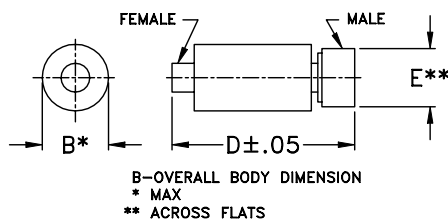


Outline Dimensions (inch)

B	D	E	wt.
.39	2.67	.312	grams
9.91	67.82	7.92	17.0

Functional Schematic



Typical Frequency Response

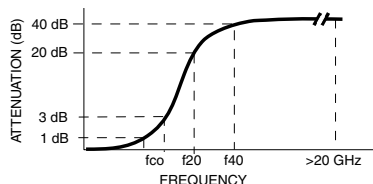


Low Pass Filter Electrical Specifications @ 25°C

MODEL NO.	PASSBAND (MHz) (Loss < 1.2dB) Max.	fco, MHz Nom (Loss 3 dB) Typ	STOPBAND (MHz) (Loss, dB)		VSWR (:1)		NO. OF SECTIONS
			f20 Min.	f40 Typ.	Stopband Typ.	Passband Typ.	
VLFX-1050	DC-1050	1675	1990	2275-20000	10	1.4	21

Typical Performance Data @ 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50	0.21	1.04
400	0.41	1.03
750	0.73	1.18
1050	1.00	1.38
1200	1.21	1.40
1450	1.58	1.17
1650	3.01	1.54
1750	6.88	3.26
1850	15.92	6.97
1900	22.14	8.92
2000	38.42	11.96
4000	87.87	40.57
6000	79.32	59.00
8000	79.32	59.00
10000	78.90	45.17
12000	47.80	3.99
14000	50.11	16.18
16000	83.95	31.61
18000	71.89	4.18
20000	69.48	8.16

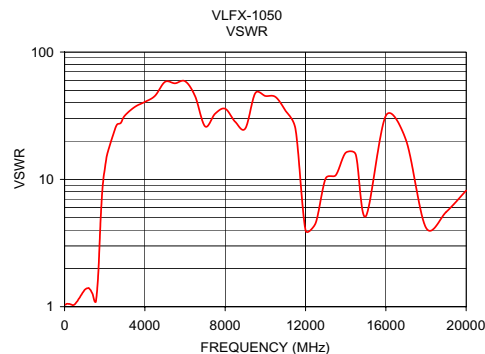

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

REV. OR
M96318
VLFX1050
EDU-0399
ED-11930A/15
URJ/RS/CP
050119