


# NAIS

**RF (Radio Frequency)  
C × R 10 Type**  
(by)

# PhotoMOS RELAYS



mm inch

## FEATURES

**1. In addition to lower output capacitance between terminals than ever before, the PhotoMOS relay achieves low ON-resistance.**

Output capacitance(C): 1.0pF (typ.)

ON resistance(R): 9.5Ω (typ.)

**2. High speed switching**

Turn on time: 30μs

Turn off time: 30μs

**3. SO package 4-pin type in super miniature design**

**4. Low-level off state leakage current**

The SSR has an off state leakage current of several milliamperes, where as this PhotoMOS relay has only 10pA (typical) even with the rated load voltage

**5. Controls low-level analog signals**

**6. Low thermal electromotive force**

(Approx. 1 μV)

## TYPICAL APPLICATIONS

Measuring and testing equipment

1. Testing equipment for semiconductor performance

IC tester, Liquid crystal driver tester, semiconductor performance tester

2. Board tester

Bear board tester, In-circuit tester, function tester

3. Medical equipment

Ultrasonic wave diagnostic machine

4. Multi-point recorder

Warping, thermo couple

## TYPES

Circuit arrangement	Type	Output rating*		Tape and reel packing style		Packing quantity in tape and reel
		Load voltage	Load current	Picked from the 1/2-pin side	Picked from the 3/4-pin side	
1 Form A	AC/DC	40 V	120 mA	AQY221N2SX	AQY221N2SZ	1,000 pcs.

\* Indicate the peak AC and DC values.

Notes: (1) Tape package is the standard packing style. Also available in tube.

(Part No. suffix "X" or "Z" is not needed when ordering; Tube: 100 pcs.; Case: 2,000 pcs.)

(2) For space reasons, the initial letters of the product number "AQY and S", the package type indicator "X" and "Z" are omitted from the seal.

## RATING


1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQY221N2S	Remarks
Input	LED forward current	I <sub>F</sub>	50mA	
	LED reverse voltage	V <sub>R</sub>	3V	
	Peak forward current	I <sub>FP</sub>	1A	f=100 Hz, Duty factor=0.1%
	Power dissipation	P <sub>in</sub>	75mW	
Output	Load voltage (peak AC)	V <sub>L</sub>	40V	
	Continuous load current	I <sub>L</sub>	0.12A	Peak AC,DC
	Peak load current	I <sub>peak</sub>	0.30A	100 ms (1 shot), V <sub>L</sub> = DC
	Power dissipation	P <sub>out</sub>	300mW	
Total power dissipation		P <sub>T</sub>	350mW	
I/O isolation voltage		V <sub>iso</sub>	1,500V AC	
Temperature limits	Operating	T <sub>opr</sub>	-40°C to +85°C -40°F to +185°F	Non-condensing at low temperatures
	Storage	T <sub>stg</sub>	-40°C to +100°C -40°F to +212°F	

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQY221N2S	Condition	
Input	LED operate current	Minimum Typical Maximum	$I_{Fon}$ 0.9 mA 3.0mA	$I_L = 80$ mA	
	LED turn off current	Minimum Typical Maximum	$I_{Foff}$ 0.2 mA 0.85mA	$I_L = 80$ mA	
	LED dropout voltage	Minimum Typical Maximum	$V_F$ 1.14V (1.25 V at $I_F = 50$ mA) 1.5 V	$I_F = 5$ mA	
Output	On resistance	Minimum Typical Maximum	$R_{on}$ 9.5Ω 12.5Ω	$I_F = 5$ mA $I_L = 80$ mA Within 1 s on time	
	Output capacitance	Minimum Typical Maximum	$C_{out}$ 1.0 pF 1.5 pF	$I_F = 0$ $V_B = 0$ V $f = 1$ MHz	
	Off state leakage current	Minimum Typical Maximum	$I_{Leak}$ 0.01 nA 10 nA	$I_F = 0$ $V_L = \text{Max.}$	
Transfer characteristics	Switching speed	Turn on time*	Minimum Typical Maximum	$T_{on}$ 0.03 ms 0.5 ms	$I_F = 5$ mA $V_L = 10$ V $R_L = 125$ Ω
		Turn off time*	Minimum Typical Maximum	$T_{off}$ 0.03ms 0.2 ms	$I_F = 5$ mA $V_L = 10$ V $R_L = 125$ Ω
	I/O capacitance		Minimum Typical Maximum	$C_{iso}$ 0.8 pF 1.5pF	$f = 1$ MHz $V_B = 0$
	Initial I/O isolation resistance		Minimum Typical Maximum	$R_{iso}$ 1,000MΩ	500V DC

\*Turn on/Turn off time

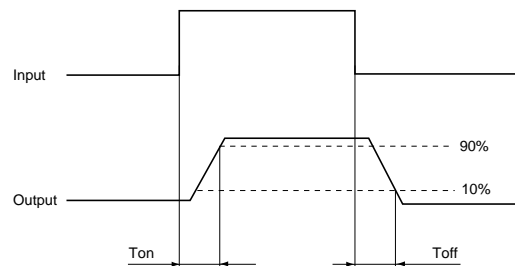


- For Dimensions, see Page 441.
- For Schematic and Wiring Diagrams, see Page 444.
- For Cautions for Use, see Page 449.


REFERENCE DATA

1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F

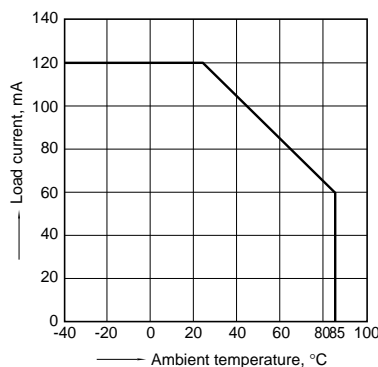


2. Load current vs. Load voltage characteristics  
Ambient temperature: 25°C 77°F

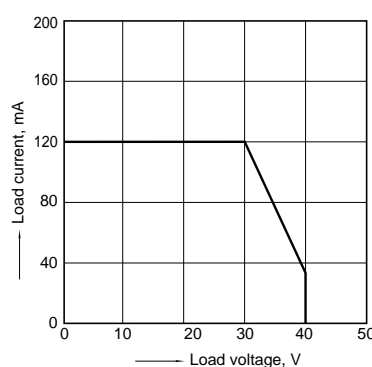

3. On resistance vs. ambient temperature characteristics


Measured portion: between terminals 3 and 4  
LED current: 5 mA; Load voltage: Max. (DC);  
Load current: 80mA (DC)

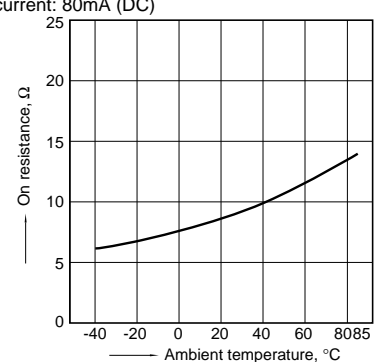

# AQY221N2S


## 4. Turn on time vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4  
LED current: 5 mA; Load voltage: 10V (DC);  
Continuous load current: 80mA (DC)

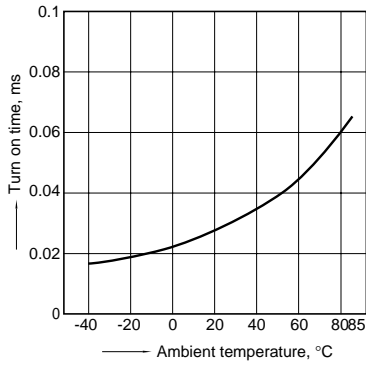


## 5. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: 10V (DC);  
Continuous load current: 80mA (DC)

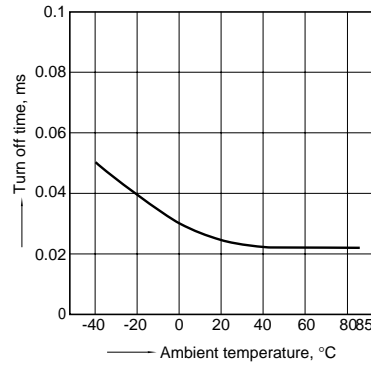


## 6. LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC); Continuous load current: 80mA (DC)

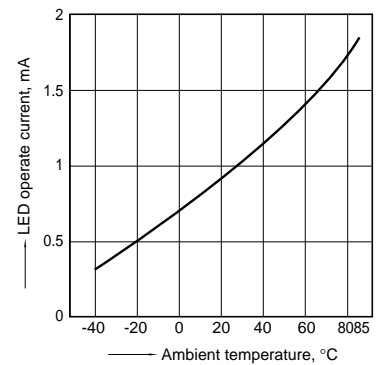


## 7. LED turn off current vs. ambient temperature characteristics

Load voltage: Max. (DC); Continuous load current: 80mA (DC)

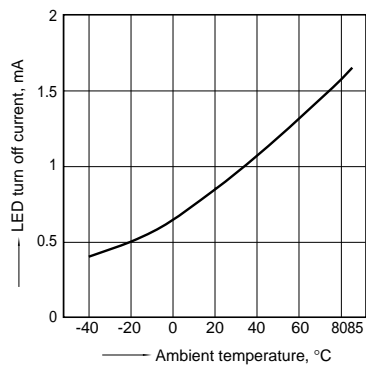


## 8. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

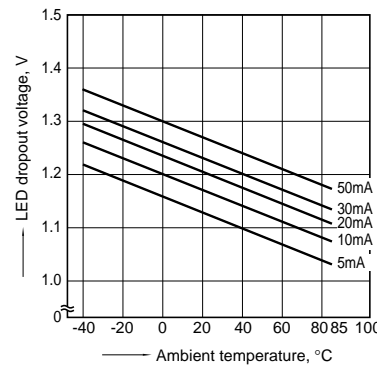


## 9. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 3 and 4  
Ambient temperature: 25°C 77°F

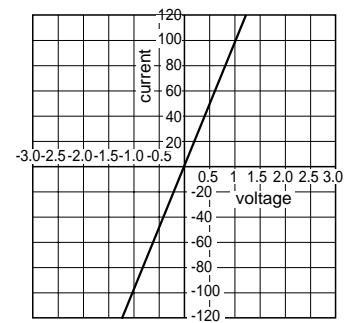


## 10. Off state leakage current

Measured portion: between terminals 3 and 4  
Ambient temperature: 25°C 77°F

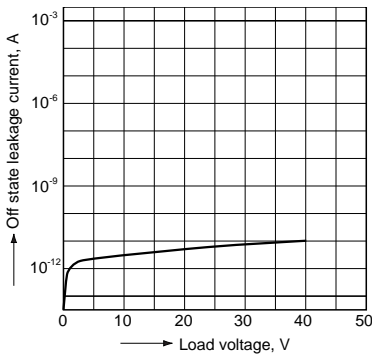


## 11. LED forward current vs. turn on time characteristics

Measured portion: between terminals 3 and 4  
Load voltage: 10V (DC); Continuous load current: 80mA (DC);  
Ambient temperature: 25°C 77°F

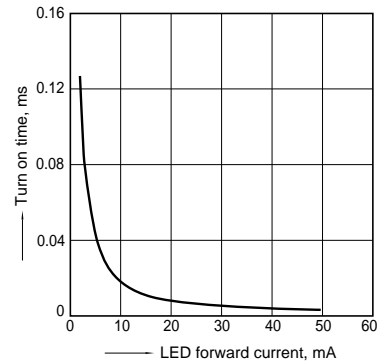


## 12. LED forward current vs. turn off time characteristics

Measured portion: between terminals 3 and 4  
Load voltage: 10V (DC);  
Continuous load current: 80mA (DC);  
Ambient temperature: 25°C 77°F

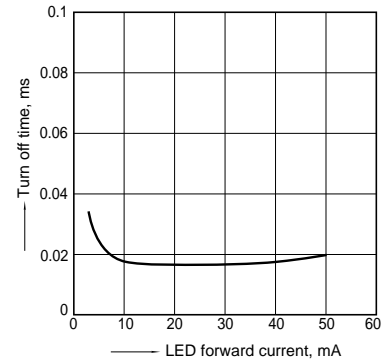


## 13. Applied voltage vs. output capacitance characteristics

Measured portion: between terminals 3 and 4  
Frequency: 1 MHz, 30m Vrms;  
Ambient temperature: 25°C 77°F

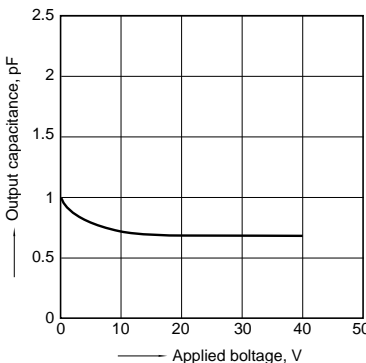


## 14. Isolation characteristics (50Ω impedance)

Measured portion: between terminals 3 and 4  
Ambient temperature: 25°C 77°F

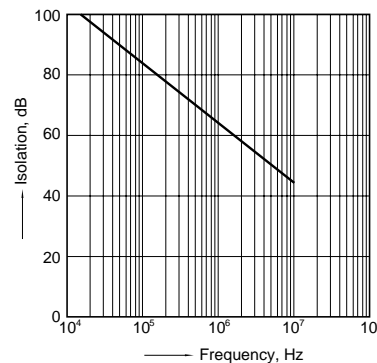


## 15. Insertion loss characteristics (50Ω impedance)

Measured portion: between terminals 3 and 4  
Ambient temperature: 25°C 77°F

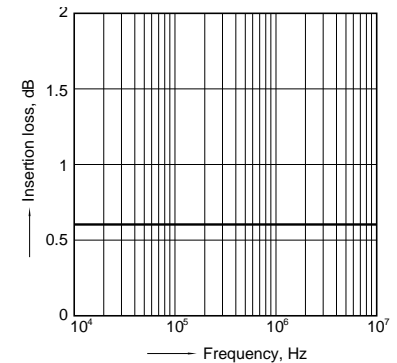


16. On resistance distribution

Measured portion: between terminals 3 and 4  
 Continuous load current: 80mA(DC)  
 Quantity, n=60; Ambient temperature: 25°C 77°F

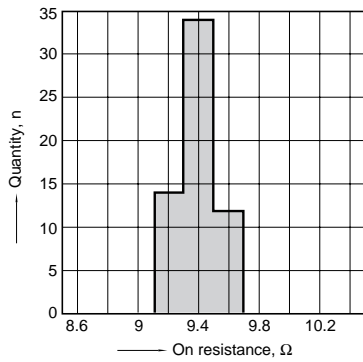


17. Turn on time distribution

Load voltage: 10V(DC);  
 Continuous load current: 80mA(DC)  
 Quantity, n=60; Ambient temperature: 25°C 77°F

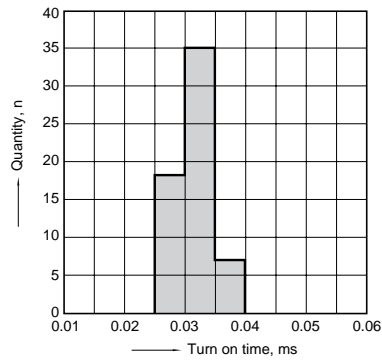

18. Turn off time distribution

Load voltage: 10V(DC);  
 Continuous load current: 80mA(DC)  
 Quantity, n=60; Ambient temperature: 25°C 77°F

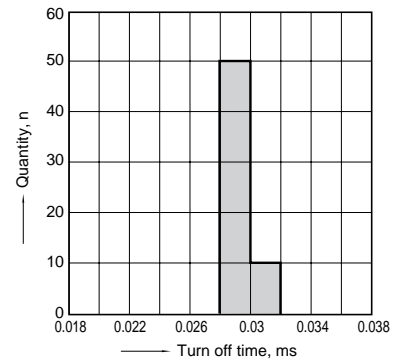

19. LED operate current distribution

Load voltage: 10V(DC);  
 Continuous load current: 80mA(DC)  
 Quantity, n=60; Ambient temperature: 25°C 77°F

