


# DIODE Type : 10E2

OUTLINE DRAWING

## FEATURES

- \* Miniature Size
- \* Low Forward Voltage drop
- \* Low Reverse Leakage Current
- \* High Surge Capability
- \* 52mm Inside Tape Spacing Package Available

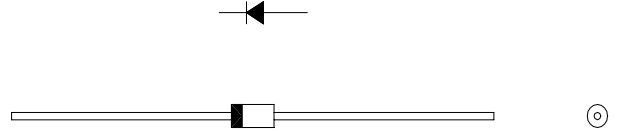

## Maximum Ratings

Approx Net Weight:0.33g

Rating	Symbol	10E2			Unit
Repetitive Peak Reverse Voltage	$V_{RRM}$	200			V
Non-repetitive Peak Reverse Voltage	$V_{RSM}$	400			V
Average Rectified Output Current	$I_O$	1.0	$T_a=70^{\circ}\text{C}$	50Hz Half Sine Wave Resistive Load	A
RMS Forward Current	$I_{F(RMS)}$	1.57			A
Surge Forward Current	$I_{FSM}$	50	50Hz Half Sine Wave, 1cycle, Non-repetitive		A
Operating Junction Temperature Range	$T_{jw}$	- 40 to + 150			$^{\circ}\text{C}$
Storage Temperature Range	$T_{stg}$	- 40 to + 150			$^{\circ}\text{C}$

## Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Current	$I_{RM}$	$T_j= 25^{\circ}\text{C}, V_{RM}= V_{RRM}$	-	-	50	$\mu\text{A}$
Peak Forward Voltage	$V_{FM}$	$T_j= 25^{\circ}\text{C}, I_{FM}= 1.0\text{A}$	-	-	0.9	V
Thermal Resistance	$R_{th(j-a)}$	Junction to Ambient	-	-	91	$^{\circ}\text{C/W}$

10E2 OUTLINE DRAWING (Dimensions in mm)

