

# MC14013B

## Dual Type D Flip-Flop

The MC14013B dual type D flip-flop is constructed with MOS P-channel and N-channel enhancement mode devices in a single monolithic structure. Each flip-flop has independent Data, (D), Direct Set, (S), Direct Reset, (R), and Clock (C) inputs and complementary outputs (Q and  $\bar{Q}$ ). These devices may be used as shift register elements or as type T flip-flops for counter and toggle applications.

- Static Operation
- Diode Protection on All Inputs
- Supply Voltage Range = 3.0 Vdc to 18 Vdc
- Logic Edge-Clocked Flip-Flop Design  
Logic state is retained indefinitely with clock level either high or low; information is transferred to the output only on the positive-going edge of the clock pulse
- Capable of Driving Two Low-power TTL Loads or One Low-power Schottky TTL Load Over the Rated Temperature Range
- Pin-for-Pin Replacement for CD4013B

### MAXIMUM RATINGS (Voltages Referenced to $V_{SS}$ ) (Note 2.)

| Symbol            | Parameter                                         | Value                  | Unit |
|-------------------|---------------------------------------------------|------------------------|------|
| $V_{DD}$          | DC Supply Voltage Range                           | -0.5 to +18.0          | V    |
| $V_{in}, V_{out}$ | Input or Output Voltage Range (DC or Transient)   | -0.5 to $V_{DD} + 0.5$ | V    |
| $I_{in}, I_{out}$ | Input or Output Current (DC or Transient) per Pin | $\pm 10$               | mA   |
| $P_D$             | Power Dissipation, per Package (Note 3.)          | 500                    | mW   |
| $T_A$             | Ambient Temperature Range                         | -55 to +125            | °C   |
| $T_{stg}$         | Storage Temperature Range                         | -65 to +150            | °C   |
| $T_L$             | Lead Temperature (8-Second Soldering)             | 260                    | °C   |

2. Maximum Ratings are those values beyond which damage to the device may occur.

3. Temperature Derating:  
Plastic "P and D/DW" Packages: - 7.0 mW/°C From 65°C To 125°C

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation,  $V_{in}$  and  $V_{out}$  should be constrained to the range  $V_{SS} \leq (V_{in} \text{ or } V_{out}) \leq V_{DD}$ .


Unused inputs must always be tied to an appropriate logic voltage level (e.g., either  $V_{SS}$  or  $V_{DD}$ ). Unused outputs must be left open.




ON Semiconductor

<http://onsemi.com>


### MARKING DIAGRAMS




PDIP-14  
P SUFFIX  
CASE 646




SOIC-14  
D SUFFIX  
CASE 751A



TSSOP-14  
DT SUFFIX  
CASE 948G



SOEIAJ-14  
F SUFFIX  
CASE 965



A = Assembly Location  
WL or L = Wafer Lot  
YY or Y = Year  
WW or W = Work Week

### ORDERING INFORMATION

| Device       | Package   | Shipping         |
|--------------|-----------|------------------|
| MC14013BCP   | PDIP-14   | 2000/Box         |
| MC14013BD    | SOIC-14   | 55/Rail          |
| MC14013BDR2  | SOIC-14   | 2500/Tape & Reel |
| MC14013BDT   | TSSOP-14  | 96/Rail          |
| MC14013BDTR2 | TSSOP-14  | 2500/Tape & Reel |
| MC14013BF    | SOEIAJ-14 | See Note 1.      |
| MC14013BFEL  | SOEIAJ-14 | See Note 1.      |

1. For ordering information on the EIAJ version of the SOIC packages, please contact your local ON Semiconductor representative.

# MC14013B


TRUTH TABLE

| Inputs                                                                            |      |       |     | Outputs |           |
|-----------------------------------------------------------------------------------|------|-------|-----|---------|-----------|
| Clock <sup>†</sup>                                                                | Data | Reset | Set | Q       | $\bar{Q}$ |
|  | 0    | 0     | 0   | 0       | 1         |
|  | 1    | 0     | 0   | 1       | 0         |
|  | X    | 0     | 0   | Q       | $\bar{Q}$ |
| X                                                                                 | X    | 1     | 0   | 0       | 1         |
| X                                                                                 | X    | 0     | 1   | 1       | 0         |
| X                                                                                 | X    | 1     | 1   | 1       | 1         |


No  
Change

X = Don't Care  
† = Level Change

PIN ASSIGNMENT



BLOCK DIAGRAM

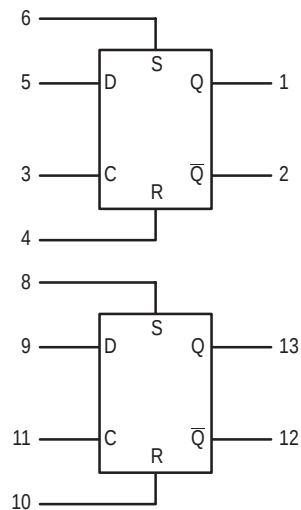

V<sub>DD</sub> = PIN 14  
V<sub>SS</sub> = PIN 7

# MC14013B

## ELECTRICAL CHARACTERISTICS (Voltages Referenced to V<sub>SS</sub>)

| Characteristic                                                                                                                                                                                                                                     | Symbol          | V <sub>DD</sub><br>Vdc | – 55°C                                                                                                                                                       |       | 25°C   |           |       | 125°C  |       | Unit |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|--------|-----------|-------|--------|-------|------|
|                                                                                                                                                                                                                                                    |                 |                        | Min                                                                                                                                                          | Max   | Min    | Typ (4.)  | Max   | Min    | Max   |      |
| Output Voltage<br>V <sub>in</sub> = V <sub>DD</sub> or 0<br><br>V <sub>in</sub> = 0 or V <sub>DD</sub>                                                                                                                                             | V <sub>OL</sub> | 5.0                    | —                                                                                                                                                            | 0.05  | —      | 0         | 0.05  | —      | 0.05  | Vdc  |
|                                                                                                                                                                                                                                                    |                 | 10                     | —                                                                                                                                                            | 0.05  | —      | 0         | 0.05  | —      | 0.05  |      |
|                                                                                                                                                                                                                                                    |                 | 15                     | —                                                                                                                                                            | 0.05  | —      | 0         | 0.05  | —      | 0.05  |      |
|                                                                                                                                                                                                                                                    | V <sub>OH</sub> | 5.0                    | 4.95                                                                                                                                                         | —     | 4.95   | 5.0       | —     | 4.95   | —     | Vdc  |
|                                                                                                                                                                                                                                                    |                 | 10                     | 9.95                                                                                                                                                         | —     | 9.95   | 10        | —     | 9.95   | —     |      |
|                                                                                                                                                                                                                                                    |                 | 15                     | 14.95                                                                                                                                                        | —     | 14.95  | 15        | —     | 14.95  | —     |      |
| Input Voltage<br>(V <sub>O</sub> = 4.5 or 0.5 Vdc)<br>(V <sub>O</sub> = 9.0 or 1.0 Vdc)<br>(V <sub>O</sub> = 13.5 or 1.5 Vdc)<br><br>(V <sub>O</sub> = 0.5 or 4.5 Vdc)<br>(V <sub>O</sub> = 1.0 or 9.0 Vdc)<br>(V <sub>O</sub> = 1.5 or 13.5 Vdc)  | V <sub>IL</sub> | 5.0                    | —                                                                                                                                                            | 1.5   | —      | 2.25      | 1.5   | —      | 1.5   | Vdc  |
|                                                                                                                                                                                                                                                    |                 | 10                     | —                                                                                                                                                            | 3.0   | —      | 4.50      | 3.0   | —      | 3.0   |      |
|                                                                                                                                                                                                                                                    |                 | 15                     | —                                                                                                                                                            | 4.0   | —      | 6.75      | 4.0   | —      | 4.0   |      |
|                                                                                                                                                                                                                                                    | V <sub>IH</sub> | 5.0                    | 3.5                                                                                                                                                          | —     | 3.5    | 2.75      | —     | 3.5    | —     | Vdc  |
|                                                                                                                                                                                                                                                    |                 | 10                     | 7.0                                                                                                                                                          | —     | 7.0    | 5.50      | —     | 7.0    | —     |      |
|                                                                                                                                                                                                                                                    |                 | 15                     | 11                                                                                                                                                           | —     | 11     | 8.25      | —     | 11     | —     |      |
| Output Drive Current<br>(V <sub>OH</sub> = 2.5 Vdc)<br>(V <sub>OH</sub> = 4.6 Vdc)<br>(V <sub>OH</sub> = 9.5 Vdc)<br>(V <sub>OH</sub> = 13.5 Vdc)<br><br>(V <sub>OL</sub> = 0.4 Vdc)<br>(V <sub>OL</sub> = 0.5 Vdc)<br>(V <sub>OL</sub> = 1.5 Vdc) | I <sub>OH</sub> | 5.0                    | – 3.0                                                                                                                                                        | —     | – 2.4  | – 4.2     | —     | – 1.7  | —     | mAdc |
|                                                                                                                                                                                                                                                    |                 | 5.0                    | – 0.64                                                                                                                                                       | —     | – 0.51 | – 0.88    | —     | – 0.36 | —     |      |
|                                                                                                                                                                                                                                                    |                 | 10                     | – 1.6                                                                                                                                                        | —     | – 1.3  | – 2.25    | —     | – 0.9  | —     |      |
|                                                                                                                                                                                                                                                    |                 | 15                     | – 4.2                                                                                                                                                        | —     | – 3.4  | – 8.8     | —     | – 2.4  | —     |      |
|                                                                                                                                                                                                                                                    | I <sub>OL</sub> | 5.0                    | 0.64                                                                                                                                                         | —     | 0.51   | 0.88      | —     | 0.36   | —     | mAdc |
|                                                                                                                                                                                                                                                    |                 | 10                     | 1.6                                                                                                                                                          | —     | 1.3    | 2.25      | —     | 0.9    | —     |      |
|                                                                                                                                                                                                                                                    |                 | 15                     | 4.2                                                                                                                                                          | —     | 3.4    | 8.8       | —     | 2.4    | —     |      |
|                                                                                                                                                                                                                                                    |                 | 15                     | 4.2                                                                                                                                                          | —     | 3.4    | 8.8       | —     | 2.4    | —     |      |
| Input Current                                                                                                                                                                                                                                      | I <sub>in</sub> | 15                     | —                                                                                                                                                            | ± 0.1 | —      | ± 0.00001 | ± 0.1 | —      | ± 1.0 | μAdc |
| Input Capacitance<br>(V <sub>in</sub> = 0)                                                                                                                                                                                                         | C <sub>in</sub> | —                      | —                                                                                                                                                            | —     | —      | 5.0       | 7.5   | —      | —     | pF   |
| Quiescent Current<br>(Per Package)                                                                                                                                                                                                                 | I <sub>DD</sub> | 5.0                    | —                                                                                                                                                            | 1.0   | —      | 0.002     | 1.0   | —      | 30    | μAdc |
|                                                                                                                                                                                                                                                    |                 | 10                     | —                                                                                                                                                            | 2.0   | —      | 0.004     | 2.0   | —      | 60    |      |
|                                                                                                                                                                                                                                                    |                 | 15                     | —                                                                                                                                                            | 4.0   | —      | 0.006     | 4.0   | —      | 120   |      |
| Total Supply Current (5.) (6.)<br>(Dynamic plus Quiescent,<br>Per Package)<br>(C <sub>L</sub> = 50 pF on all outputs, all<br>buffers switching)                                                                                                    | I <sub>T</sub>  | 5.0<br>10<br>15        | I <sub>T</sub> = (0.75 μA/kHz) f + I <sub>DD</sub><br>I <sub>T</sub> = (1.5 μA/kHz) f + I <sub>DD</sub><br>I <sub>T</sub> = (2.3 μA/kHz) f + I <sub>DD</sub> |       |        |           |       |        |       | μAdc |

4. Data labelled "Typ" is not to be used for design purposes but is intended as an indication of the IC's potential performance.

5. The formulas given are for the typical characteristics only at 25°C.

6. To calculate total supply current at loads other than 50 pF:

$$I_T(C_L) = I_T(50 \text{ pF}) + (C_L - 50) \text{ Vfk}$$

where: I<sub>T</sub> is in μA (per package), C<sub>L</sub> in pF, V = (V<sub>DD</sub> – V<sub>SS</sub>) in volts, f in kHz is input frequency, and k = 0.002.

# MC14013B

## SWITCHING CHARACTERISTICS <sup>(7.)</sup> ( $C_L = 50 \text{ pF}$ , $T_A = 25^\circ\text{C}$ )


| Characteristic                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Symbol                   | $V_{DD}$                                                      | Min                                               | Typ <sup>(8.)</sup>                                            | Max                                                                 | Unit          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|---------------------------------------------------------------|---------------------------------------------------|----------------------------------------------------------------|---------------------------------------------------------------------|---------------|
| Output Rise and Fall Time<br>$t_{TLH}$ , $t_{THL} = (1.5 \text{ ns/pF}) C_L + 25 \text{ ns}$<br>$t_{TLH}$ , $t_{THL} = (0.75 \text{ ns/pF}) C_L + 12.5 \text{ ns}$<br>$t_{TLH}$ , $t_{THL} = (0.55 \text{ ns/pF}) C_L + 9.5 \text{ ns}$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | $t_{TLH}$ ,<br>$t_{THL}$ | 5.0<br>10<br>15                                               | —<br>—<br>—                                       | 100<br>50<br>40                                                | 200<br>100<br>80                                                    | ns            |
| Propagation Delay Time<br>Clock to Q, $\bar{Q}$<br>$t_{PLH}$ , $t_{PHL} = (1.7 \text{ ns/pF}) C_L + 90 \text{ ns}$<br>$t_{PLH}$ , $t_{PHL} = (0.66 \text{ ns/pF}) C_L + 42 \text{ ns}$<br>$t_{PLH}$ , $t_{PHL} = (0.5 \text{ ns/pF}) C_L + 25 \text{ ns}$<br>Set to Q, $\bar{Q}$<br>$t_{PLH}$ , $t_{PHL} = (1.7 \text{ ns/pF}) C_L + 90 \text{ ns}$<br>$t_{PLH}$ , $t_{PHL} = (0.66 \text{ ns/pF}) C_L + 42 \text{ ns}$<br>$t_{PLH}$ , $t_{PHL} = (0.5 \text{ ns/pF}) C_L + 25 \text{ ns}$<br>Reset to Q, $\bar{Q}$<br>$t_{PLH}$ , $t_{PHL} = (1.7 \text{ ns/pF}) C_L + 265 \text{ ns}$<br>$t_{PLH}$ , $t_{PHL} = (0.66 \text{ ns/pF}) C_L + 67 \text{ ns}$<br>$t_{PLH}$ , $t_{PHL} = (0.5 \text{ ns/pF}) C_L + 50 \text{ ns}$ | $t_{PLH}$ ,<br>$t_{PHL}$ | 5.0<br>10<br>15<br><br>5.0<br>10<br>15<br><br>5.0<br>10<br>15 | —<br>—<br>—<br><br>—<br>—<br>—<br><br>—<br>—<br>— | 175<br>75<br>50<br><br>175<br>75<br>50<br><br>225<br>100<br>75 | 350<br>150<br>100<br><br>350<br>150<br>100<br><br>450<br>200<br>150 | ns            |
| Setup Times <sup>(9.)</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | $t_{su}$                 | 5.0<br>10<br>15                                               | 40<br>20<br>15                                    | 20<br>10<br>7.5                                                | —<br>—<br>—                                                         | ns            |
| Hold Times <sup>(9.)</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | $t_h$                    | 5.0<br>10<br>15                                               | 40<br>20<br>15                                    | 20<br>10<br>7.5                                                | —<br>—<br>—                                                         | ns            |
| Clock Pulse Width                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | $t_{WL}$ , $t_{WH}$      | 5.0<br>10<br>15                                               | 250<br>100<br>70                                  | 125<br>50<br>35                                                | —<br>—<br>—                                                         | ns            |
| Clock Pulse Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | $f_{cl}$                 | 5.0<br>10<br>15                                               | —<br>—<br>—                                       | 4.0<br>10<br>14                                                | 2.0<br>5.0<br>7.0                                                   | MHz           |
| Clock Pulse Rise and Fall Time                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | $t_{TLH}$ ,<br>$t_{THL}$ | 5.0<br>10<br>15                                               | —<br>—<br>—                                       | —<br>—<br>—                                                    | 15<br>5.0<br>4.0                                                    | $\mu\text{s}$ |
| Set and Reset Pulse Width                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | $t_{WL}$ , $t_{WH}$      | 5.0<br>10<br>15                                               | 250<br>100<br>70                                  | 125<br>50<br>35                                                | —<br>—<br>—                                                         | ns            |
| Removal Times<br>Set<br><br>Reset                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | $t_{rem}$                | 5<br>10<br>15<br><br>5<br>10<br>15                            | 80<br>45<br>35<br><br>50<br>30<br>25              | 0<br>5<br>5<br><br>-35<br>-10<br>-5                            | —<br>—<br>—<br><br>—<br>—<br>—                                      | ns            |

7. The formulas given are for the typical characteristics only at  $25^\circ\text{C}$ .


8. Data labelled "Typ" is not to be used for design purposes but is intended as an indication of the IC's potential performance.

9. Data must be valid for 250 ns with a 5 V supply, 100 ns with 10 V, and 70 ns with 15 V.

## LOGIC DIAGRAM (1/2 of Device Shown)

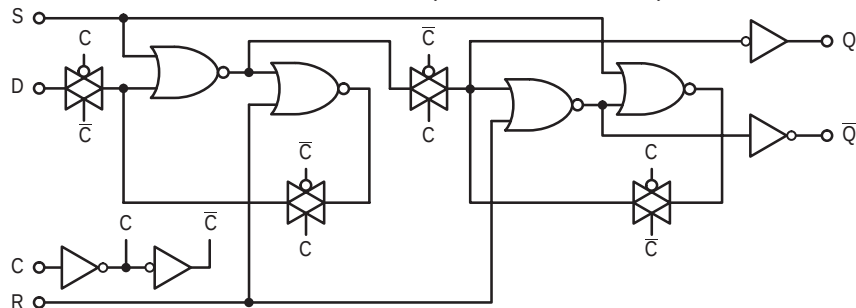


# MC14013B

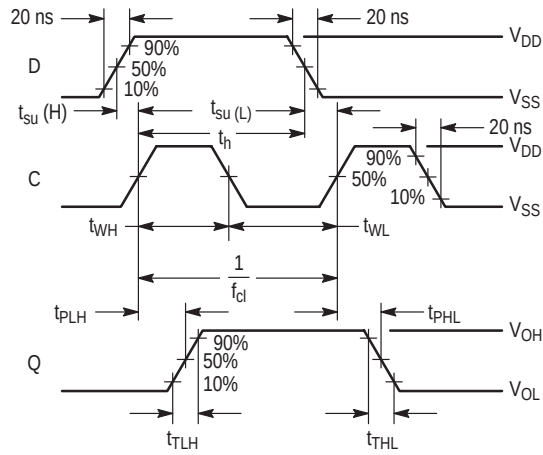

Inputs R and S low.


**Figure 1. Dynamic Signal Waveforms  
(Data, Clock, and Output)**

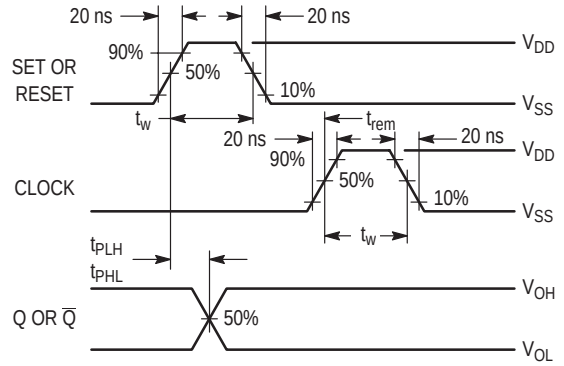


**Figure 2. Dynamic Signal Waveforms  
(Set, Reset, Clock, and Output)**

## TYPICAL APPLICATIONS


### n-STAGE SHIFT REGISTER

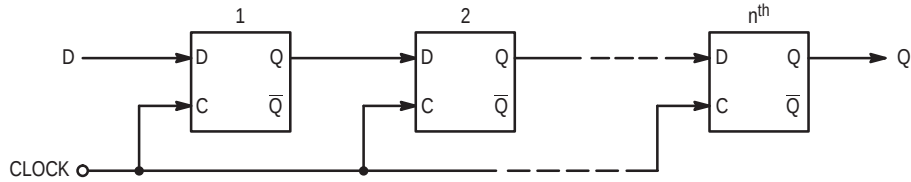

### BINARY RIPPLE UP-COUNTER (Divide-by- $2^n$ )

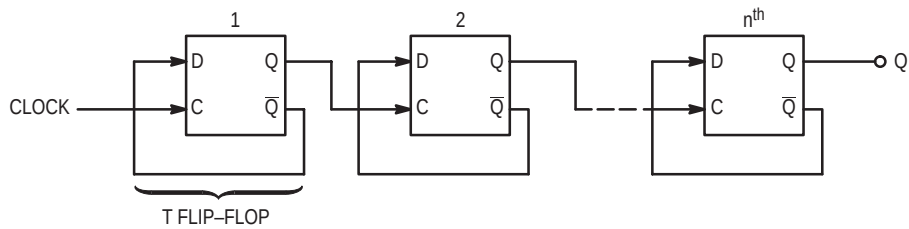


### MODIFIED RING COUNTER (Divide-by- $(n+1)$ )

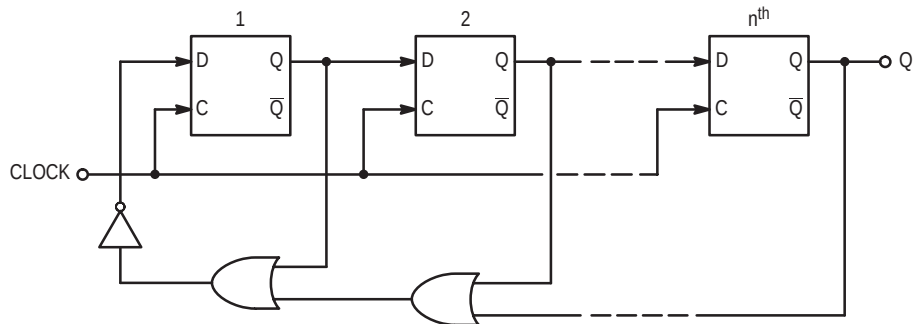

# MC14013B

## PACKAGE DIMENSIONS

### P SUFFIX PLASTIC DIP PACKAGE CASE 646-06 ISSUE M

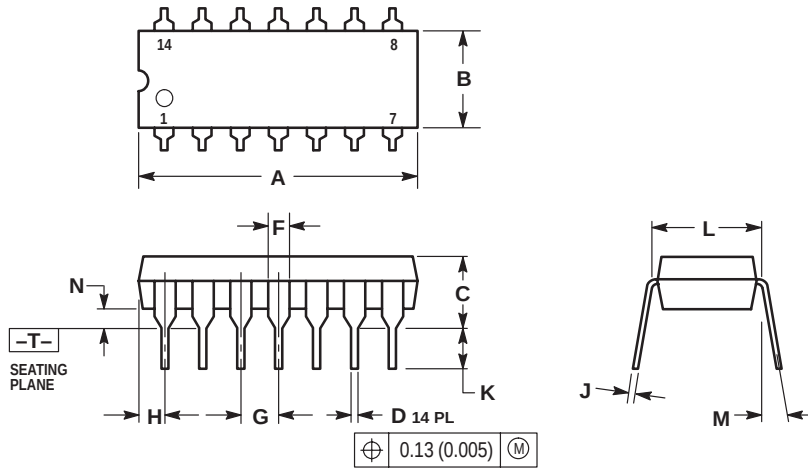


#### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
5. ROUNDED CORNERS OPTIONAL.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.715     | 0.770 | 18.16       | 18.80 |
| B   | 0.240     | 0.260 | 6.10        | 6.60  |
| C   | 0.145     | 0.185 | 3.69        | 4.69  |
| D   | 0.015     | 0.021 | 0.38        | 0.53  |
| F   | 0.040     | 0.070 | 1.02        | 1.78  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.052     | 0.095 | 1.32        | 2.41  |
| J   | 0.008     | 0.015 | 0.20        | 0.38  |
| K   | 0.115     | 0.135 | 2.92        | 3.43  |
| L   | 0.290     | 0.310 | 7.37        | 7.87  |
| M   | —         | 10°   | —           | 10°   |
| N   | 0.015     | 0.039 | 0.38        | 1.01  |

### D SUFFIX PLASTIC SOIC PACKAGE CASE 751A-03 ISSUE F

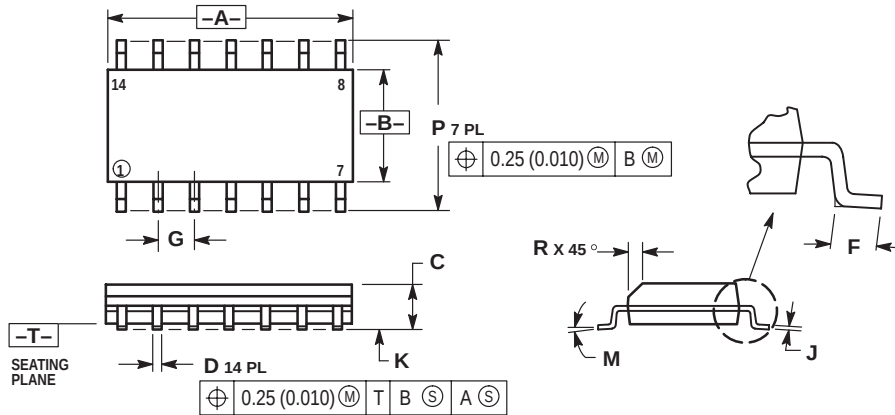

#### NOTES:


1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 8.55        | 8.75 | 0.337     | 0.344 |
| B   | 3.80        | 4.00 | 0.150     | 0.157 |
| C   | 1.35        | 1.75 | 0.054     | 0.068 |
| D   | 0.35        | 0.49 | 0.014     | 0.019 |
| F   | 0.40        | 1.25 | 0.016     | 0.049 |
| G   | 1.27 BSC    |      | 0.050 BSC |       |
| J   | 0.19        | 0.25 | 0.008     | 0.009 |
| K   | 0.10        | 0.25 | 0.004     | 0.009 |
| M   | 0°          | 7°   | 0°        | 7°    |
| P   | 5.60        | 6.20 | 0.228     | 0.244 |
| R   | 0.25        | 0.50 | 0.010     | 0.019 |

# MC14013B

## PACKAGE DIMENSIONS

### DT SUFFIX PLASTIC TSSOP PACKAGE CASE 948G-01 ISSUE O

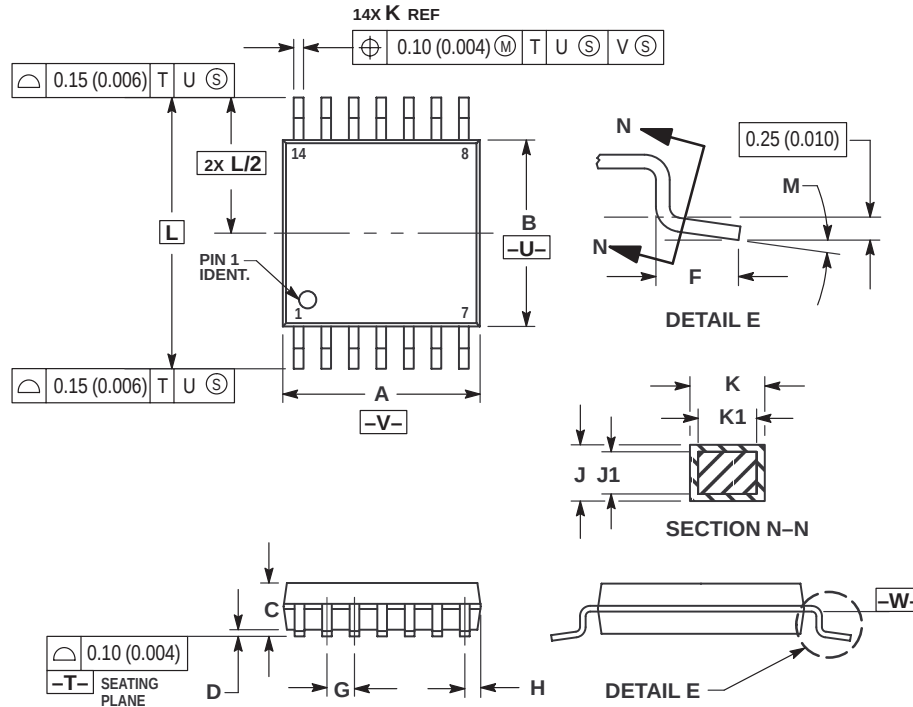


#### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-

| DIM | MIN      | MAX  | MIN       | MAX   |
|-----|----------|------|-----------|-------|
| A   | 4.90     | 5.10 | 0.193     | 0.200 |
| B   | 4.30     | 4.50 | 0.169     | 0.177 |
| C   | —        | 1.20 | —         | 0.047 |
| D   | 0.05     | 0.15 | 0.002     | 0.006 |
| F   | 0.50     | 0.75 | 0.020     | 0.030 |
| G   | 0.65 BSC | —    | 0.026 BSC | —     |
| H   | 0.50     | 0.60 | 0.020     | 0.024 |
| J   | 0.09     | 0.20 | 0.004     | 0.008 |
| J1  | 0.09     | 0.16 | 0.004     | 0.006 |
| K   | 0.19     | 0.30 | 0.007     | 0.012 |
| K1  | 0.19     | 0.25 | 0.007     | 0.010 |
| L   | 6.40 BSC | —    | 0.252 BSC | —     |
| M   | 0°       | 8°   | 0°        | 8°    |

### F SUFFIX PLASTIC EIAJ SOIC PACKAGE CASE 965-01 ISSUE O

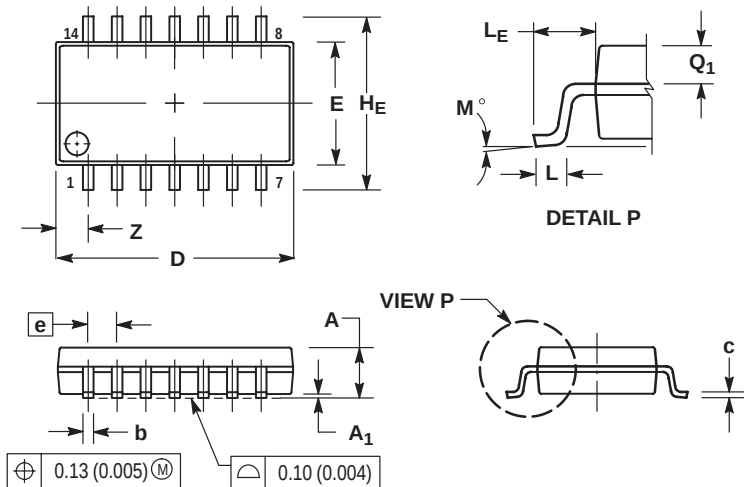

#### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS AND ARE MEASURED AT THE PARTING LINE. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
5. THE LEAD WIDTH DIMENSION (b) DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE LEAD WIDTH DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT. MINIMUM SPACE BETWEEN PROTRUSIONS AND ADJACENT LEAD TO BE 0.46 (0.018).

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | —           | 2.05  | —         | 0.081 |
| A1  | 0.05        | 0.20  | 0.002     | 0.008 |
| b   | 0.35        | 0.50  | 0.014     | 0.020 |
| c   | 0.18        | 0.27  | 0.007     | 0.011 |
| D   | 9.90        | 10.50 | 0.390     | 0.413 |
| E   | 5.10        | 5.45  | 0.201     | 0.215 |
| e   | 1.27 BSC    | —     | 0.050 BSC | —     |
| H   | 7.40        | 8.20  | 0.291     | 0.323 |
| H1  | 0.50        | 0.85  | 0.020     | 0.033 |
| L   | 1.10        | 1.50  | 0.043     | 0.059 |
| M   | 0°          | 10°   | 0°        | 10°   |
| Q1  | 0.70        | 0.90  | 0.028     | 0.035 |
| Z   | —           | 1.42  | —         | 0.056 |

**ON Semiconductor** and  are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

## PUBLICATION ORDERING INFORMATION

### NORTH AMERICA Literature Fulfillment:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** ONlit@hibbertco.com  
Fax Response Line: 303-675-2167 or 800-344-3810 Toll Free USA/Canada

**N. American Technical Support:** 800-282-9855 Toll Free USA/Canada

**EUROPE:** LDC for ON Semiconductor – European Support

**German Phone:** (+1) 303-308-7140 (M–F 1:00pm to 5:00pm Munich Time)  
**Email:** ONlit-german@hibbertco.com  
**French Phone:** (+1) 303-308-7141 (M–F 1:00pm to 5:00pm Toulouse Time)  
**Email:** ONlit-french@hibbertco.com  
**English Phone:** (+1) 303-308-7142 (M–F 12:00pm to 5:00pm UK Time)  
**Email:** ONlit@hibbertco.com

**EUROPEAN TOLL-FREE ACCESS\*: 00-800-4422-3781**

\*Available from Germany, France, Italy, England, Ireland

### CENTRAL/SOUTH AMERICA:

**Spanish Phone:** 303-308-7143 (Mon–Fri 8:00am to 5:00pm MST)  
**Email:** ONlit-spanish@hibbertco.com

**ASIA/PACIFIC:** LDC for ON Semiconductor – Asia Support

**Phone:** 303-675-2121 (Tue–Fri 9:00am to 1:00pm, Hong Kong Time)  
Toll Free from Hong Kong & Singapore:  
**001-800-4422-3781**  
**Email:** ONlit-asia@hibbertco.com

**JAPAN:** ON Semiconductor, Japan Customer Focus Center  
4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan 141-8549  
**Phone:** 81-3-5740-2745  
**Email:** r14525@onsemi.com

**ON Semiconductor Website:** <http://onsemi.com>

For additional information, please contact your local Sales Representative.