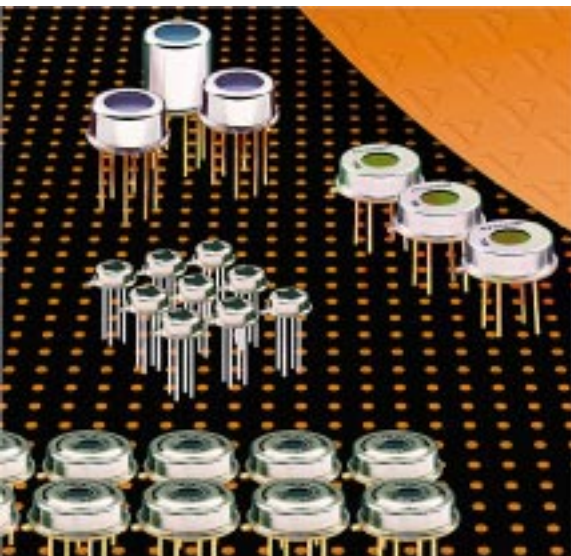


Thermopile Infrared Detectors

Quad Thermopile TPS 4339

Four individual thermopiles with different infrared bandpass filters in TO 5 housing for NDIR gas sensing – up to 4 gases possible

Thermistor temperature reference included

Internal aperture to avoid cross talk





Standard gas filter sets for reference, CO, hydrocarbon, CO₂

The quad thermopile sensor consists of four single thermopile chips mounted in a TO 5 housing with a thermistor as temperature reference. The window size is 1.5 x 1.5 mm² each. Due to the overall small sensor size the construction of a very compact equipment becomes possible.

Applications in automotive exhaust gas control, multiple gas detection for the safety product market or air quality monitoring

For further information please refer to the TPS 4339 product note

Parameters		TPS 4339		
		typical	units	condition
Sensitive area	4x	0.7 x 0.7	mm ²	absorbing area
Window size		1.5 x 1.5	mm ²	each channel
DC sensitivity		75	V/W	500K BB w/o filter
Resistance		75	kΩ	
Noise		21	nV/√Hz	r.m.s. 300K
NEP		0.28	nW/√Hz	500K BB w/o filter
D*		1.6 x 10 ⁸	cm√Hz/W	500K BB w/o filter
TC of sensitivity		0.02	%/K	
TC of resistance		0.02	%/K	
Time constant		25	ms	
Operating temperature	-40	100	°C	non permanent
Storage temperature	-40	100	°C	non permanent
Thermistor resistance		100	kΩ	25°C
beta		3964	K	25°C/100°C
Field of view	4x	60	°	at 50% points

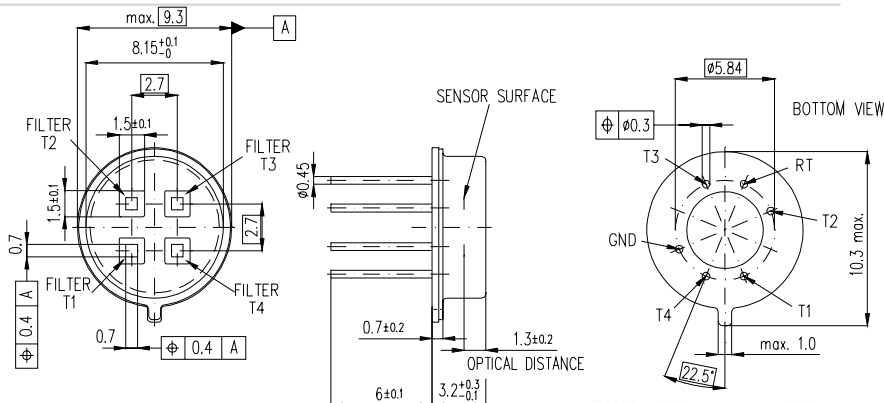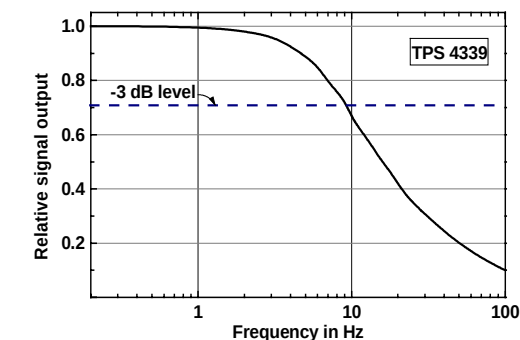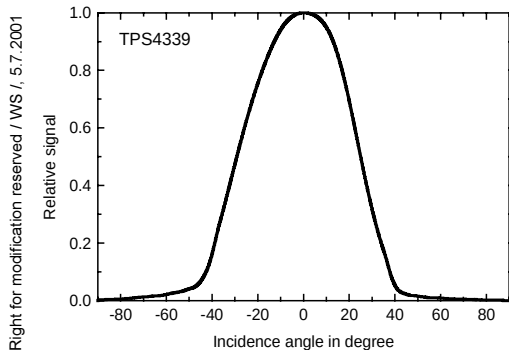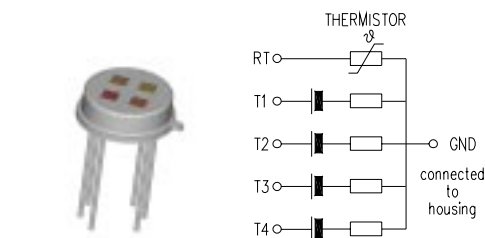

Europe:
PerkinElmer Optoelectronics GmbH
 Wenzel Jaksch Str 31
 Wiesbaden / Germany
 Phone +49(0)611 492 0
 Fax +49(0)611 492 170

USA:
PerkinElmer Optoelectronics
 2175 Mission College Blvd
 Santa Clara, CA 95054
 Phone +408 565 0830
 Fax +408 565 0703

Asia:
PerkinElmer Optoelectronics
 47, Ayer Rajah Crescent #06-12
 Singapore 139947
 Phone +65 775 2022
 Fax +65 775 1008

PerkinElmer
 optoelectronics