

Title AlGaAs, double-heterojunction, visible laser diodes

RLD-78PP-G1 / RLD-78NP-G1

RLD-78PP-G1 and RLD-78NP-G1 are the semiconductor laser developed for the laser beam printer application. We have achieved the very small variations of the optical characteristics and low droop by ROHM original Epitaxial growth technology using Molecular Beam Epitaxy. In addition, they have the appropriate characteristics for sensor application as well.


●Applications

Laser beam printers
Sensors

●Features

- 1) Minimum variation of radiation beam angle.
- 2) Low droop.
- 3) High stability wave length.
- 4) Can be driven by single power supply.

●External dimensions (Units : mm)

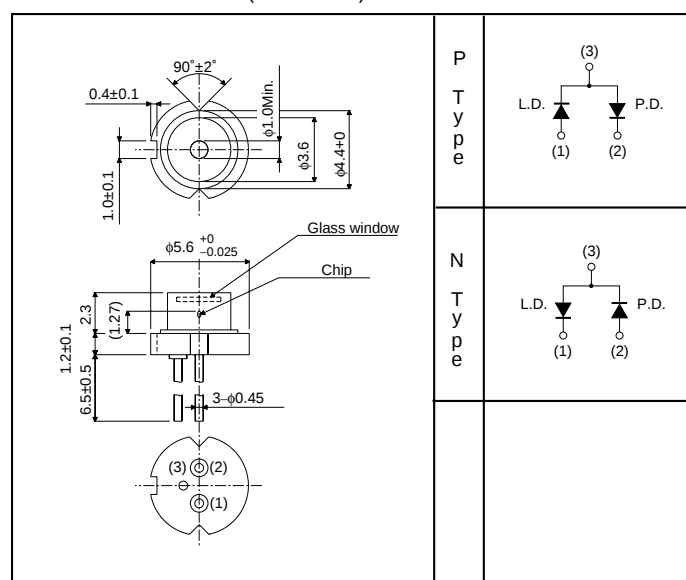

●Absolute maximum ratings (Tc=25°C)

Parameter		Symbol	Limits	Unit
Output		Po	5	mW
Reverse voltage	Laser	VR	2	V
	PIN photodiode	VR(PIN)	30	V
Operating temperature		Topr	-10~+60	°C
Storage temperature		Tstg	-40~+85	°C

Laser Diodes

●Electrical and optical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Threshold current	I_{th}	10	25	45	mA	-
Operating current	I_{op}	15	45	65	mA	$P_o=3mW$
Operating voltage	V_{op}	-	1.9	2.3	V	$P_o=3mW$
Differential efficiency	η	0.1	0.2	0.3	mW/mA	$\frac{2mW}{I(3mW)-I(1mW)}$
Monitor current	I_m	0.3	0.55	0.9	mA	$P_o=3mW$
Parallel divergence angle	$\theta_{//}^*$	8	11	15	deg	$P_o=3mW$
Perpendicular divergence angle	$\theta_{\perp}^*$	25	30	38	deg	
Parallel deviation angle	$\Delta\phi_{//}$	-	-	± 2	deg	
Perpendicular deviation angle	$\Delta\phi_{\perp}$	-	-	± 3	deg	
Emission point accuracy	ΔX ΔY ΔZ	-	-	± 80	μm	-
Peak emission wavelength	λ	770	785	795	nm	$P_o=3mW$
Droop	ΔP	-	5	10	%	$P_o=3mW$

* $\theta_{//}$ and $\theta_{\perp}$ are defined as the angle within which the intensity is 50% of the peak value.

●Electrical and optical curves

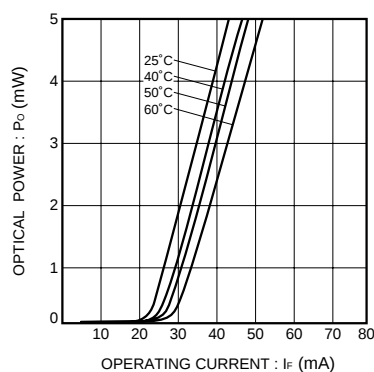


Fig. 1 Optical output vs. operating current

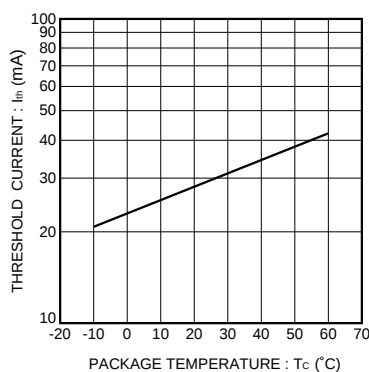


Fig. 2 Dependence of threshold current on temperature

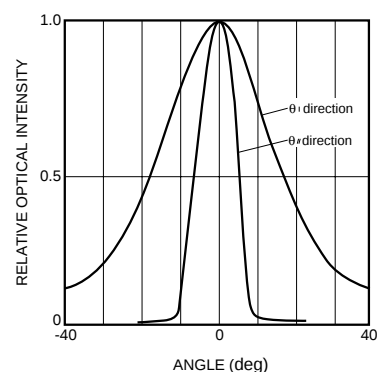


Fig. 3 Far field pattern

Laser Diodes

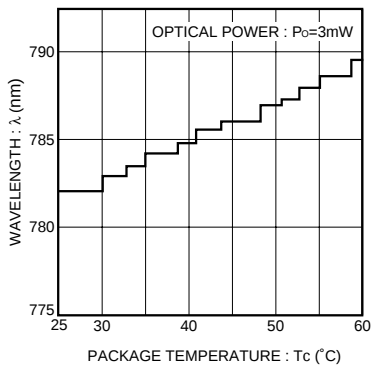


Fig. 4 Dependence of wavelength on temperature

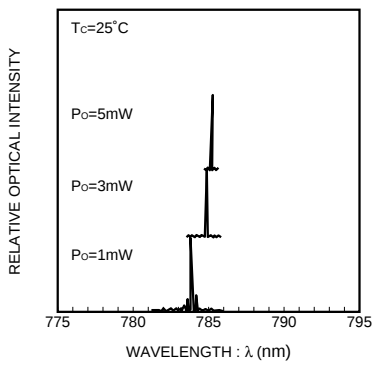


Fig. 5 Dependence of emission spectrum on optical output

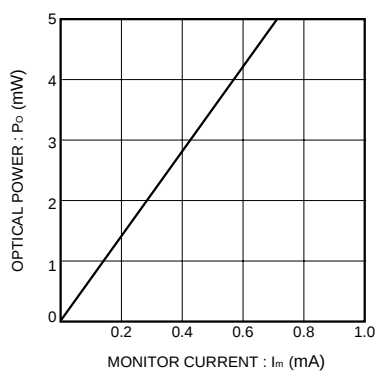


Fig. 6 Monitor current vs. optical output

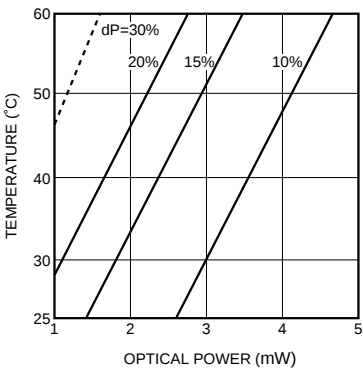


Fig. 7 Temperature vs. output guidelines for various droop percentages

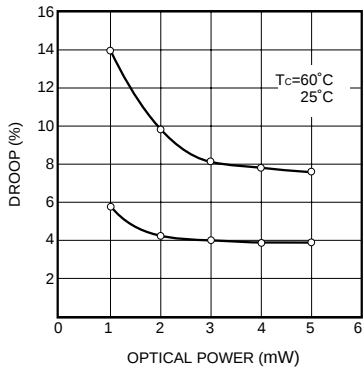


Fig. 8 Dependence of droop on output