

1.2V / 2.5V Micropower Voltage Reference

FEATURES

- Initial Voltage Tolerance:
SPX1004-1.2 = $\pm 4\text{mV}$
SPX1004-2.5 = $\pm 20\text{mV}$
- Low Dynamic Impedance
0.6 Ω Max.
- Low Operating Current:
SPX1004-1.2 = $\pm 10\mu\text{A}$
SPX1004-2.5 = $\pm 20\mu\text{A}$
- Wide Operating Current Range
10 μA to 20mA
- Direct Replacement for LT1004,
LM1004 and AS1004

APPLICATIONS

- A/D and D/A Reference
- Reference for 5V Systems
- Digital Voltmeter
- Power Supply Monitor

DESCRIPTION

The SPX1004 is a 2-terminal bandgap precision voltage reference that provides a stable fixed output voltage of 1.2V and 2.5V with a tolerance of $\pm 4\text{mV}$ for SPX1004-1.2 and $\pm 20\text{mV}$ for SPX1004-2.5. Design, process and precision on chip trimming yield a very low temperature coefficient of 25 ppm/ $^{\circ}\text{C}$.

The SPX1004 can be used as a pin-to-pin replacement for the LT1004, LM1004 or AS1004. The SPX1004 is available in SOT-89, SOIC-8 and TO-92 packages over the operating temperature range of 0°C to 70°C.

BLOCK DIAGRAM

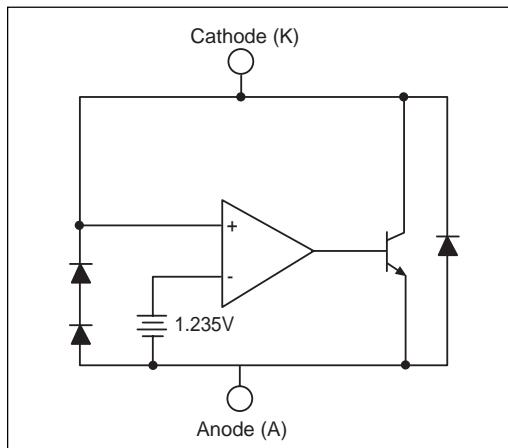


Figure 1a. SPX1004-1.2 Block Diagram

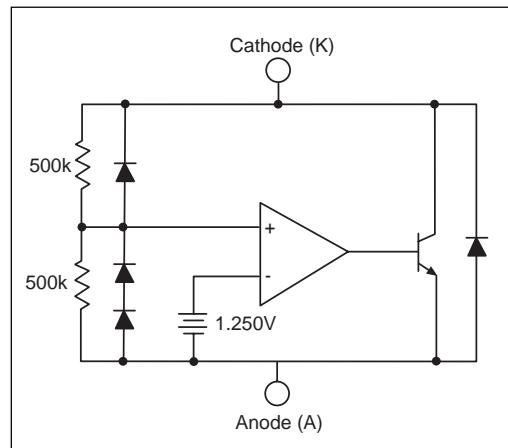


Figure 1b. SPX1004-2.5 Block Diagram

ABSOLUTE MAXIMUM RATINGS

Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Forward Current (I_{AK}).....	10mA
Reverse Current (I_{KA}).....	30mA
Lead Temperature (soldering, 10 seconds).....	300°C
Storage Temperature Range.....	-65°C to +150°C
Junction Temperature.....	150°C

Continuous Power Dissipation (P_D)

TO-92.....	775mW
SOIC-8.....	750mW
SOT-89.....	1000mW

TYPICAL THERMAL RESISTANCES

PACKAGE	θ_{JA}	θ_{JA}	TYPICAL DERATING
TO-92	160°C/W	80°C/W	6.3 mW/°C
SOIC-8	175°C/W	45°C/W	5.7mW/°C
SOT-89	110°C/W	8°C/W	9.1mW/°C

ELECTRICAL CHARACTERISTICS

Electrical characteristics are guaranteed over full junction temperature range (0°C to 70°C). Ambient temperature must be derated based on power dissipation and package thermal characteristics.

PARAMETER	CONDITIONS	SPX1004-1.2V			SPX1004-2.5V			UNITS
		MIN	Typ	MAX	MIN	Typ	MAX	
Reverse breakdown	$I_z=100\mu A$, $T_j=25^\circ C$ $0^\circ C \leq T_A \leq 70^\circ C$	1.231	1.235	1.239	2.480	2.500	2.520	V
		1.225	1.235	1.245	2.470	2.500	2.530	
Ave Temp. Coeff.	$ I_{min} \leq I_z \leq 20mA$		20			60		ppm/ °C
Min Operating Current			4	10		12	20	μA
Reverse Breakdown	$ I_{min} \leq I_z \leq 1mA$		0.5	1		0.5	1	mV
Voltage Change with Current	over temperature $1mA \leq I_z \leq 20mA$ over temperature		0.5	1.5		0.5	1.5	
			6.5	10		6.5	10	
			6.5	20		6.5	20	
Reverse Dynamic Impedance	$I_z=100\mu A$, $f=25Hz$ over temperature		0.2	0.6		0.8	0.9	Ω
			1	1.5			1.5	
Wide Band Noise	$I_z=100\mu A$, $10Hz \leq f \leq 10kHz$		60			120		μV
Long Term Stability	$I_z=100\mu A$, $T_A=25^\circ C \pm 0.1^\circ C$		20			60		ppm/ kHr
Operating Temp Range			0	70		0	70	°C

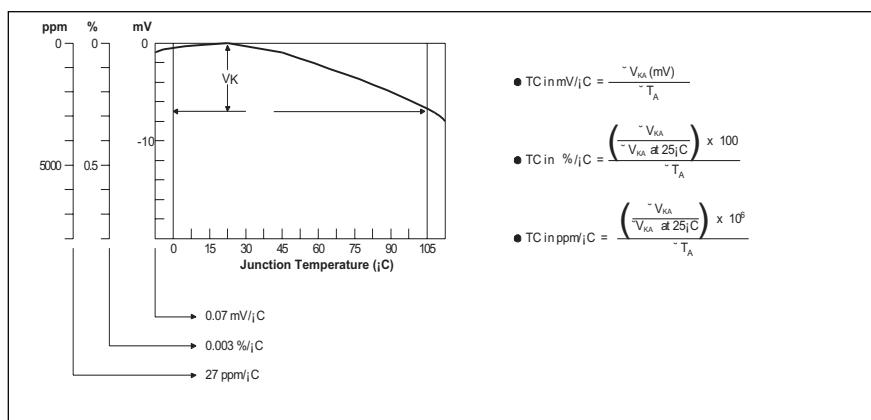


Figure 2. V_{REF} vs Temperature for 2.5V Version

TYPICAL PERFORMANCE CHARACTERISTICS

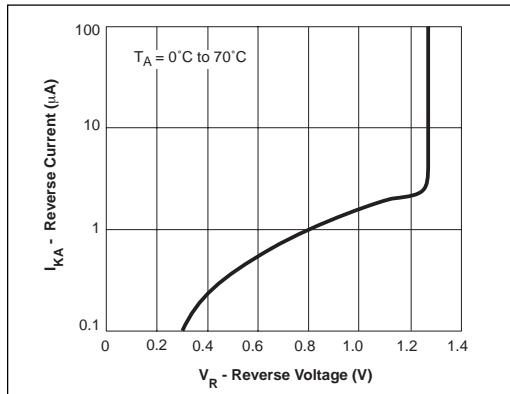


Figure 3. SPX1004-1.2V Reverse Operating Characteristic

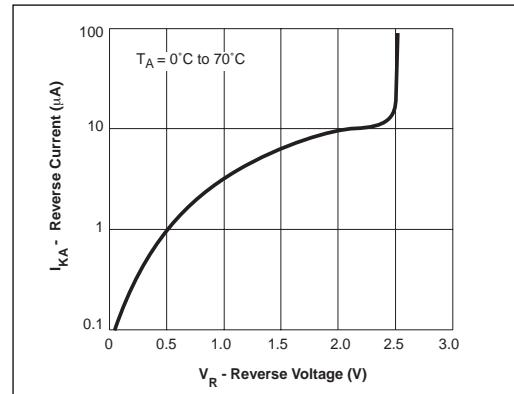


Figure 4. SPX1004-2.5 Reverse Operating Characteristic

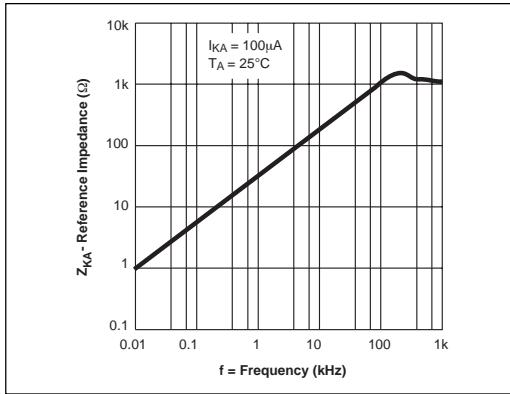


Figure 5. SPX1004-1.2V Reverse Dynamic Impedance

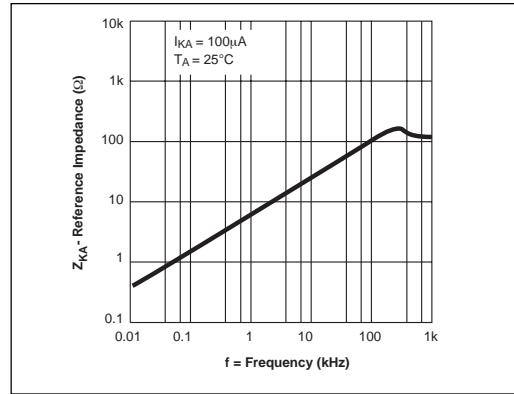


Figure 6. SPX1004-2.5V Reverse Dynamic Impedance

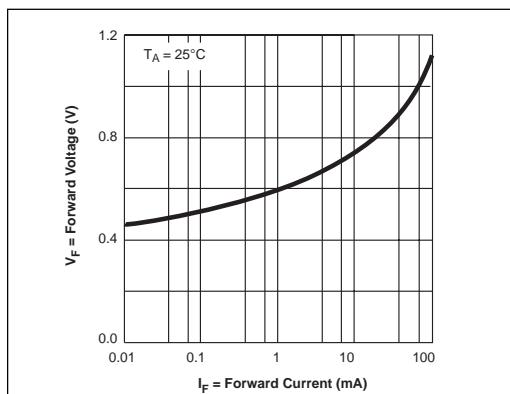


Figure 7. Forward Characteristics for SPX1004-1.2 and SPX1004-2.5

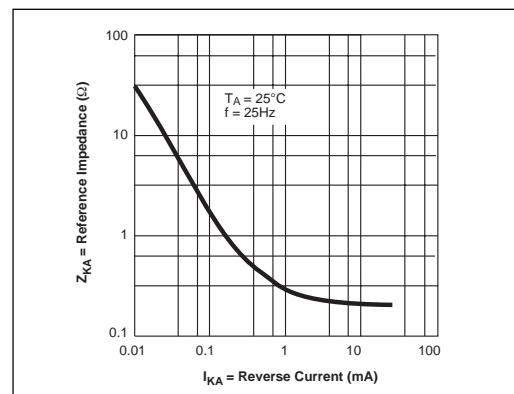


Figure 8. Low Frequency Reverse Dynamic Impedance for SPX1004-1.2

APPLICATION CIRCUITS

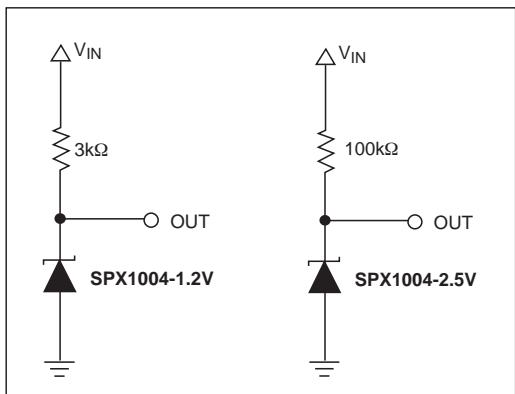


Figure 9a. 1.2V Reference, Figure 9b. 2.5V Reference

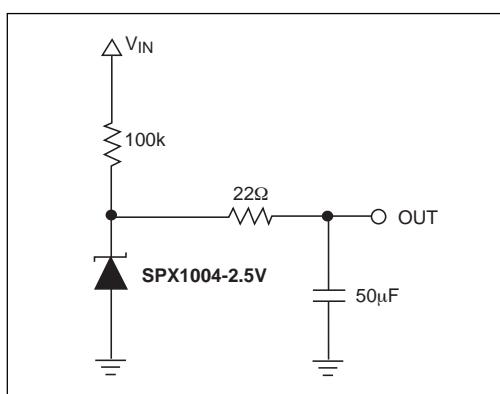


Figure 10. Low Noise Reference

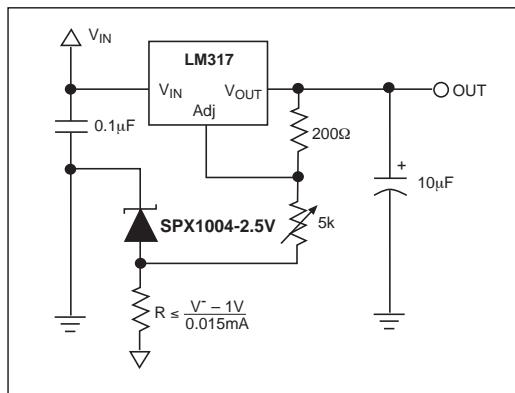


Figure 11. Variable Output Regulator

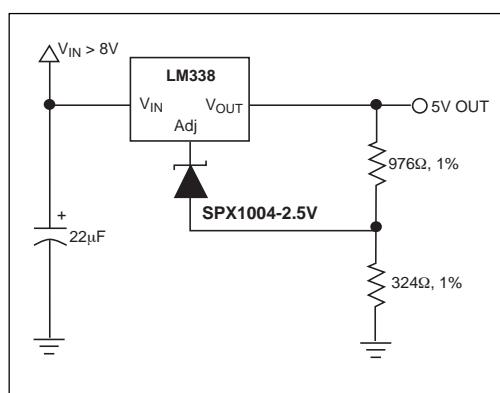


Figure 12. High Stability 5V Regulator

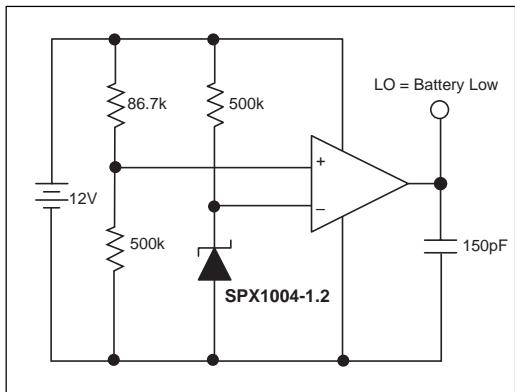


Figure 13. Low Battery Detector


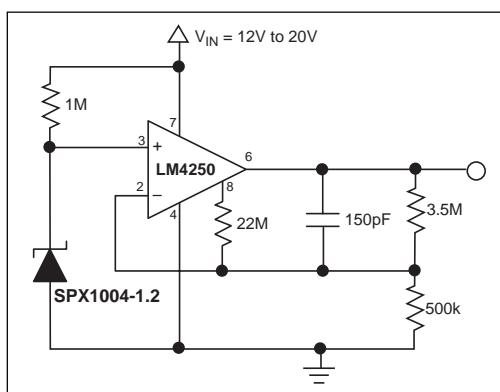


Figure 14. Micropower 10V Reference

PACKAGES

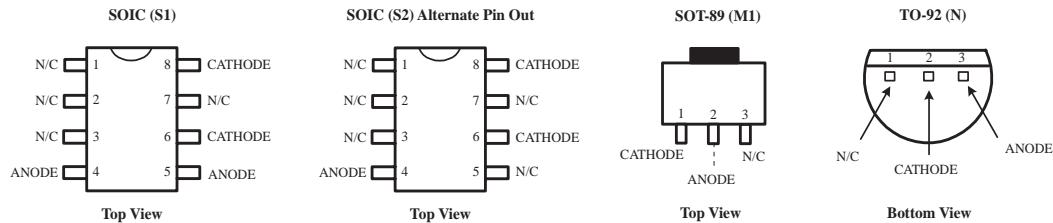

ORDERING INFORMATION

Ordering No.	Accuracy	Output Voltage	Packages
SPX1004M1-1.2	0.3%	1.235V	3-Pin SOT-89
SPX1004S1-1.2	0.3%	1.235V	8-Pin SOIC
SPX1004S2-1.2	0.3%	1.235V	8-Pin SOIC, alternate pinout
SPX1004N-1.2	0.3%	1.235V	3-Pin TO-92
<hr/>			
SPX1004M1-2.5	0.8%	2.500V	3-Pin SOT-89
SPX1004S1-2.5	0.8%	2.500V	8-Pin SOIC
SPX1004S2-2.5	0.8%	2.500V	8-Pin SOIC, alternate pinout
SPX1004N-2.5	0.8%	2.500V	3-Pin TO-92

Please consult the factory for pricing and availability on a Tape-On-Reel option.



SIGNAL PROCESSING EXCELLENCE

Sipex Corporation

**Headquarters and
Sales Office**

233 South Hillview Drive
Milpitas, CA 95035
TEL: (408) 934-7500
FAX: (408) 935-7600

Sales Office

22 Linnell Circle
Billerica, MA 01821
TEL: (978) 667-8700
FAX: (978) 670-9001
e-mail: sales@sipex.com

Sipex Corporation reserves the right to make changes to any products described herein. Sipex does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.