

Precision Linear Transducers, Conductive Plastic (REC)



FEATURES

- Large Measurement Range
- High Accuracy $\pm 1\%$ down to $\pm 0.025\%$
- Long Life
- Essentially Infinite Resolution
- Easy mounting

The 110 L is a compact, robust, easily mounted precision industrial motion transducer.

ELECTRICAL SPECIFICATIONS	
Theoretical electrical travel (TET)	25mm to 450mm in increments of 25mm
Independent linearity (over TET) on request	$\leq \pm 1\% \leq \pm 0.1\%$ $\leq \pm 0.05\%$ for $E \geq 100\text{mm}$ $\leq \pm 0.025\%$ for $E \geq 200\text{mm}$
Actual electrical travel (AET)	See Electrical Connections Table 1
Repeatability	$\leq \pm 0.01\%$
Ohmic values (R _T)	400Ω/cm to 2kΩ/cm
Resistance tolerance at 20°C	$\pm 20\%$
Maximum power rating	0.05W/cm at 70°C 0W at 125°C
Wiper current	recommended: a few μA - 1mA max. continuous
Load resistance	minimum $10^3 \times R_T$
Insulation resistance	$\geq 1000\text{M}\Omega$ 500VDC
Dielectric strength	$\geq 750\text{VRMS}$ 50Hz



MECHANICAL SPECIFICATIONS	
Mechanical travel	TET + 6mm min
Housing	anodized aluminum
Operating force	5N typical
Shaft (free rotation)	stainless steel
Termination on request	connector: 723 series by cable
Wiper	precious metal multifinger
Mounting	movable brackets

PERFORMANCE	
Operating life	40 million cycles typical
Temperature range	- 55°C + 125°C
Mechanical shocks on 3 axes	50g - 11ms - half sine
Sine vibrations on 3 axes	1.5mm peak to peak or 15g - 10Hz - 2000Hz





DIMENSIONS in millimeters, general tolerance $\pm 1\text{mm}$

STANDARD MODEL

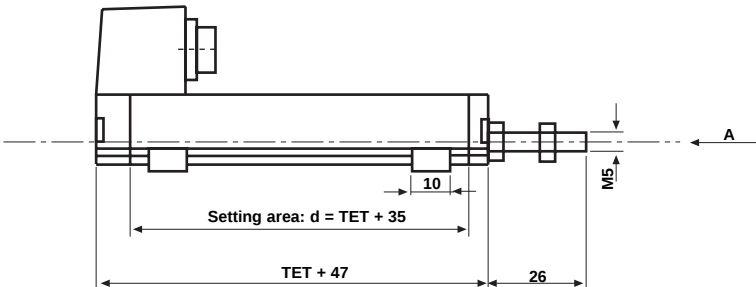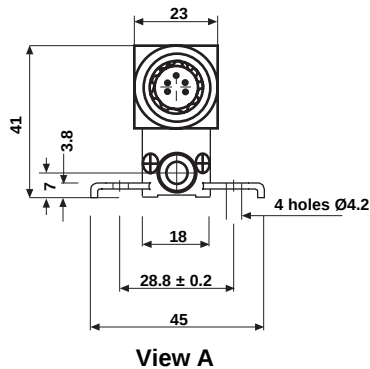


WITH CABLE OUTPUT: W04029

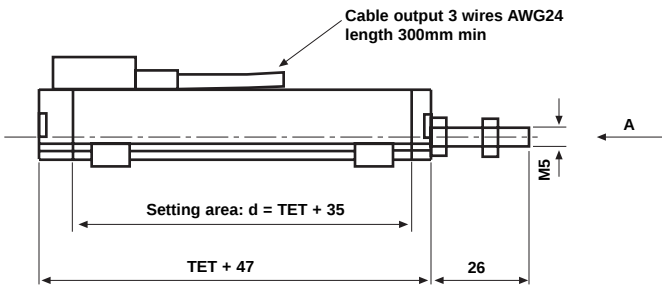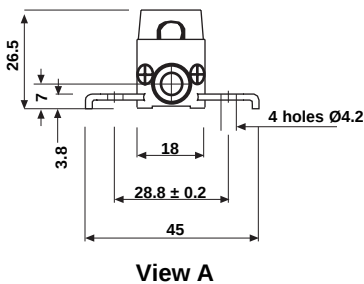


ELECTRICAL CONNECTIONS

STD AND W04030

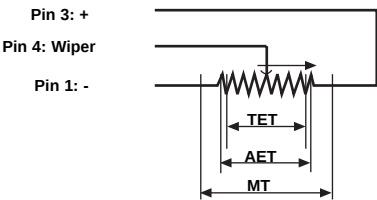

W04029 AND W04031

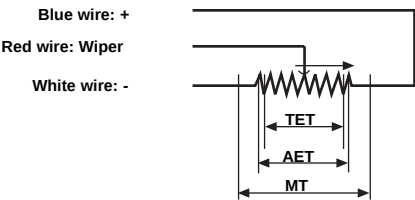

TET = Theoretical electrical travel
AET = Actual electrical travel
MT = Mechanical travel

Table 1

THEORETICAL ELECTRICAL TRAVEL TET	ACTUAL ELECTRICAL TRAVEL AET	TOLERANCE
from 25mm to 275mm	TET + 1 mm	$\pm 0.5\text{mm}$
from 300mm to 450mm	TET + 1 mm	$\pm 0.8\text{mm}$

OPTION: SPRING LOADED SHAFT DIMENSIONS in millimeters, general tolerance ± 1 mm

110L WITH SPRING LOADED SHAFT: W04030




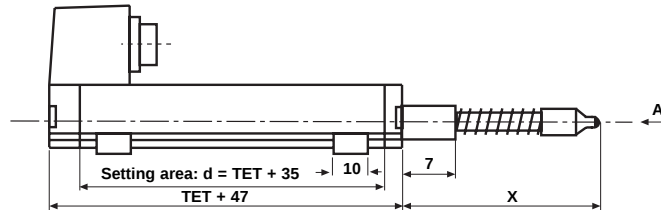


Table 2

MODEL	X
110 L1	75
110 L2	112
110 L3	150
110 L4	188


110L WITH CABLE OUTPUT AND SPRING LOADED SHAFT: W04031

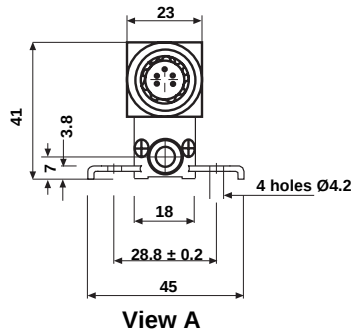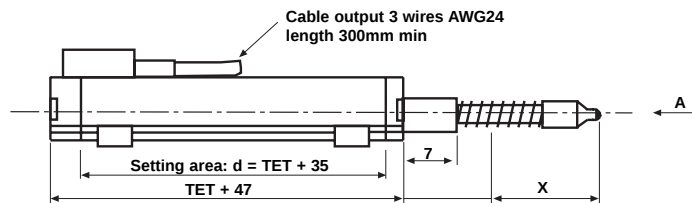

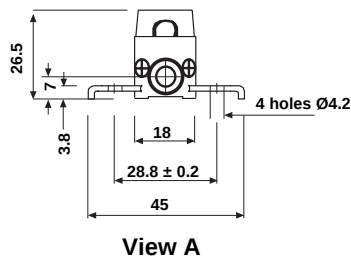


ACCESSORIES ON REQUEST DIMENSIONS in millimeters, general tolerance $\pm 1\text{ mm}$

1) FEMALE CONNECTOR
Vishay's Reference: 328870



2) SPECIAL BALL JOINT
Vishay's reference: 323654

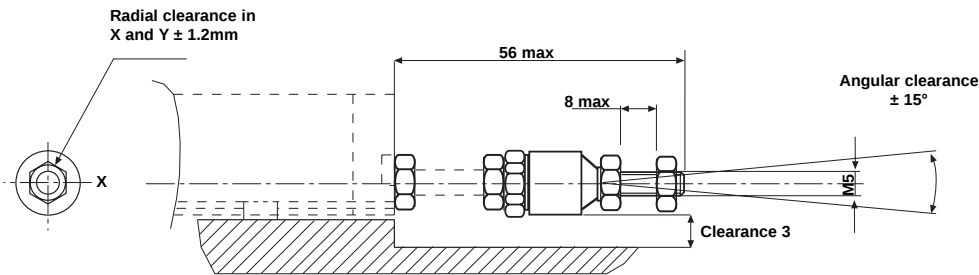

ORDERING INFORMATION

REC	110	L	3	D	103	W...
SERIES	MODEL	NUMBER OF TRACKS	THEORETICAL ELECTRICAL TRAVEL	LINEARITY	OHMIC VALUE	MODIFICATIONS
		L = 1 track	Times 25 mm	A : $\pm 1\%$ D : $\pm 0.1\%$ E : $\pm 0.05\%$ F : $\pm 0.025\%$	First 2 digits are significant numbers 3rd digit indicates number of zeros	Special feature code number