

Agilent HDSP-B58x Series 53.3 mm (2.1 inch) General Purpose 5 x 8 Dot Matrix Bi-Color Alphanumeric Displays Data Sheet



Description

These displays have a 53.3 mm (2.1 inch) character height. The devices are available in either common row anode or common row cathode configurations. The displays come in only black face paint. This bi-color display consists of GaP Red (HER) and GaP Green colors.

These parts are subjected to Out-going Quality Assurance (OQA) inspection with an AQL of 0.065% for functional and visual/cosmetic defects.

Devices

| HDSP- | Description |
|-------|--|
| B581 | 53.3 mm Black Surface Common Row Anode |
| B582 | 53.3 mm Black Surface Common Row Cathode |

Note:

1. For details, please contact your local Agilent components sales office or an authorized distributor.

Features

- **5 x 8 Dot matrix font**
- **X-Y stackable**
- **Pin-out**
 - 45.72 mm (1.8 in.) Dual-In-Line (DIP) leads on 2.54 mm (0.1 in.) centers
- **Color**
 - Bi-color: GaP Red and GaP Green
- **Face paint color: black**
- **Design flexibility**
 - Common row anode or common row cathode
- **Categorized for luminance**



Applications

- **Suitable for indoor use**
- **Not recommended for industrial applications, i.e., operating temperature requirements exceeding 85°C or below -35°C**
- **Extreme temperature cycling not recommended^[1]**




Agilent Technologies

Package Dimensions

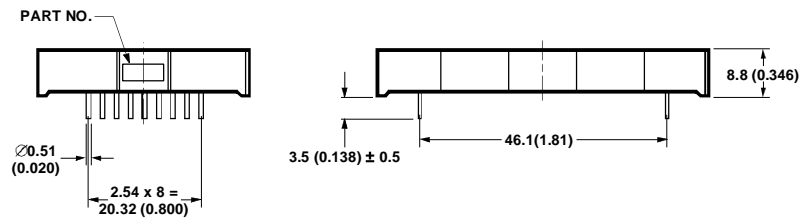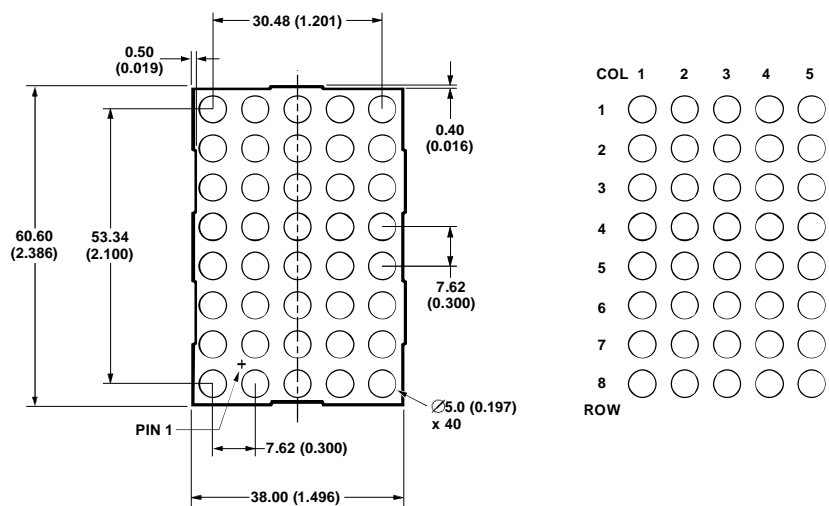


NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETERS (INCHES).
2. UNLESS OTHERWISE STATED, TOLERANCES ARE ± 0.25 mm.

Internal Circuit Diagram
HDSP-B581

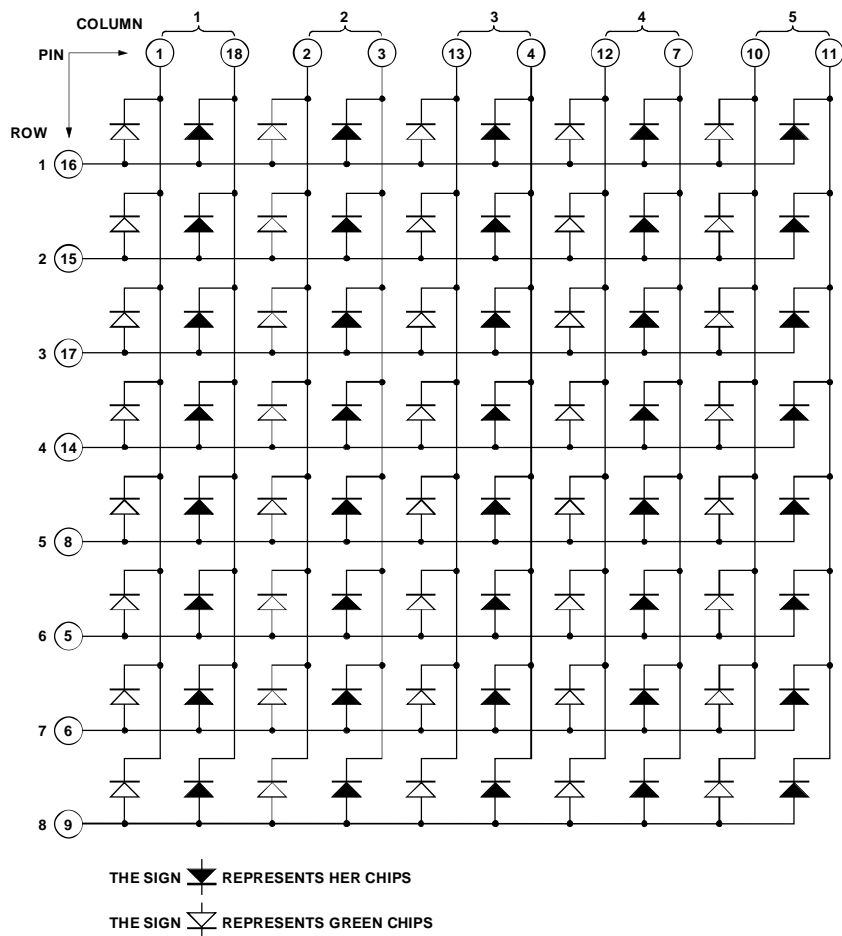

| PIN NO. | CONNECTION |
|---------|----------------|
| 1 | COLUMN 1 GREEN |
| 2 | COLUMN 2 GREEN |
| 3 | COLUMN 2 RED |
| 4 | COLUMN 3 RED |
| 5 | ROW 6 |
| 6 | ROW 7 |
| 7 | COLUMN 4 RED |
| 8 | ROW 5 |
| 9 | ROW 8 |
| 10 | COLUMN 5 GREEN |
| 11 | COLUMN 5 RED |
| 12 | COLUMN 4 GREEN |
| 13 | COLUMN 3 GREEN |
| 14 | ROW 4 |
| 15 | ROW 2 |
| 16 | ROW 1 |
| 17 | ROW 3 |
| 18 | COLUMN 1 RED |

Internal Circuit Diagram
HDSP-B582

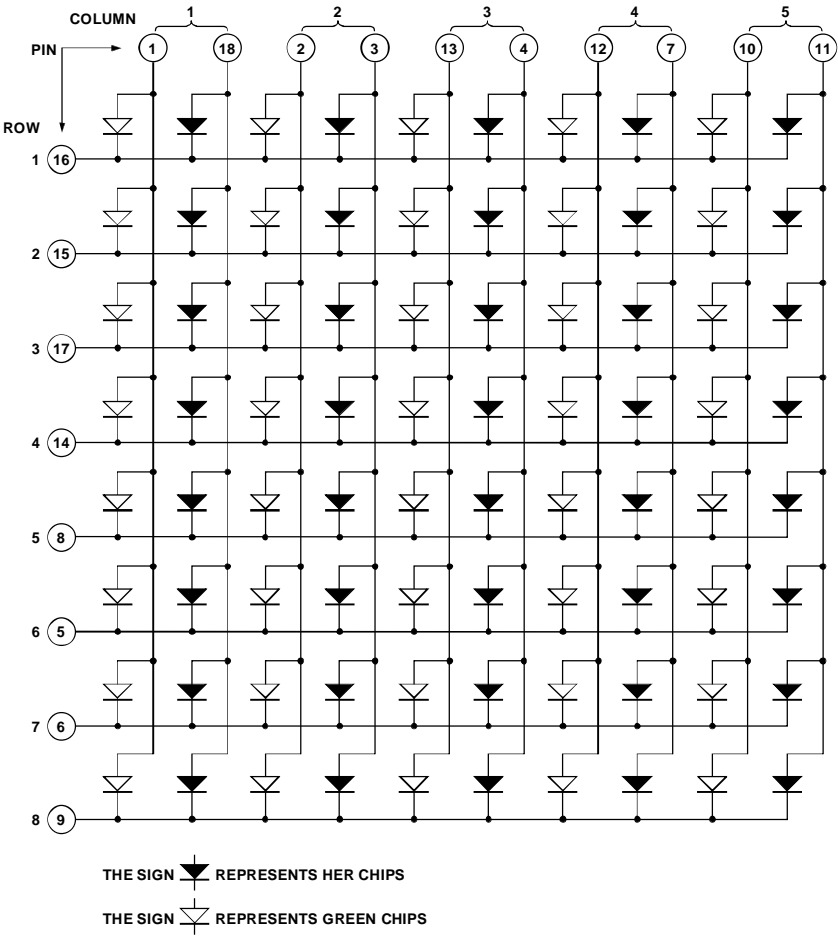

| PIN NO. | FUNCTION |
|---------|----------------------|
| 1 | COLUMN 1 GREEN ANODE |
| 2 | COLUMN 2 GREEN ANODE |
| 3 | COLUMN 2 RED ANODE |
| 4 | COLUMN 4 RED ANODE |
| 5 | ROW 6 CATHODE |
| 6 | ROW 7 CATHODE |
| 7 | COLUMN 4 RED ANODE |
| 8 | ROW 5 CATHODE |
| 9 | ROW 8 CATHODE |
| 10 | COLUMN 5 GREEN ANODE |
| 11 | COLUMN 5 RED ANODE |
| 12 | COLUMN 4 GREEN ANODE |
| 13 | COLUMN 3 GREEN ANODE |
| 14 | ROW 4 CATHODE |
| 15 | ROW 2 CATHODE |
| 16 | ROW 1 CATHODE |
| 17 | ROW 3 CATHODE |
| 18 | COLUMN 1 RED ANODE |

Absolute Maximum Ratings at T_A = 25°C

| Parameter | GaP Red HDSP-B581/B582 | GaP Green HDSP-B581/B582 | Units |
|--|---------------------------|-----------------------------|-------|
| Average Power per Dot ^[1] | 65 | 65 | mW |
| Peak Forward Current per Dot ^[1] (1/8 Duty Cycle at 10 kHz) | 80 | 100 | mA |
| Average Forward Current per Dot | 25 ^[1,2] | 25 ^[1,3] | mA |
| Reverse Voltage per Dot | 3 | 3 | V |
| Operating Temperature | –35 to +85 | –35 to +85 | °C |
| Storage Temperature | –35 to +85 | –35 to +85 | °C |
| Lead Solder Temperature for 3 seconds ^[4] (2 mm [0.078 in.] below seating plane) | 260 | 260 | °C |

Notes:

1. Do not exceed maximum average current per dot.
2. Derate above 25°C at 0.20 mA/°C.
3. Derate above 25°C at 0.33 mA/°C.
4. Not recommended to be soldered more than two times. Minimum interval between solderings is 15 minutes.
Total soldering time not to exceed 3 seconds.

Optical/Electrical Characteristics at T_A = 25°C

GaP Red

| Devices HDSP- | Parameter | Symbol | Min. | Typ. | Max. | Units | Test Conditions |
|------------------|--------------------------------------|------------------|------|------|------|-------|---|
| B581/ B582 | Peak Wavelength | λ_{peak} | | 640 | | nm | I _F = 20 mA |
| | Dominant Wavelength ^[2] | λ_d | | 628 | | nm | I _F = 20 mA |
| | Forward Voltage | V _F | | 2.1 | 2.6 | V | I _F = 20 mA |
| | Reverse Voltage ^[3] | V _R | 3.0 | | | V | I _R = 100 μ A |
| | Luminous Intensity Matching Ratio | I _{V-m} | | | 2:1 | | I _{FP} = 40 mA, 1/8 Duty Factor |

GaP Green

| Devices HDSP- | Parameter | Symbol | Min. | Typ. | Max. | Units | Test Conditions |
|------------------|--------------------------------------|------------------|------|------|------|-------|---|
| B581/ B582 | Peak Wavelength | λ_{peak} | | 568 | | nm | I _F = 20 mA |
| | Dominant Wavelength ^[2] | λ_d | | 573 | | nm | I _F = 20 mA |
| | Forward Voltage | V _F | | 2.3 | 2.6 | V | I _F = 20 mA |
| | Reverse Voltage ^[3] | V _R | 3.0 | | | V | I _R = 100 μ A |
| | Luminous Intensity Matching Ratio | I _{V-m} | | | 2:1 | | I _{FP} = 40 mA, 1/8 Duty Factor |

Bi-Color

| Devices HDSP- | Parameter | Symbol | Min. | Typ. | Max. | Units | Test Conditions |
|------------------|--|----------------|------|------|------|-------------------|---|
| B581 B582 | Luminance/Unit (Digit Average) ^[1] | I _V | 72 | 110 | 179 | Cd/m ² | I _{FP} = 40 mA, 1/8 Duty Factor |

Notes:

1. The digits are categorized for luminance. The luminance category is designated by a letter on the side of the package.
2. The dominant wavelength, λ_d , is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
3. Typical specification for reference only. Do not exceed absolute maximum ratings.

Bi-Color (Cd/m² at I_{FP} = 40 mA, 1/8 Duty Factor)

| Bin Name | Min. ^[2] | Max. ^[2] |
|----------|---------------------|---------------------|
| E | 72 | 86 |
| F | 86 | 104 |
| G | 104 | 124 |
| H | 124 | 149 |
| I | 149 | 179 |

Hue Grade

| Coordinate | 4 | 5 | Bin 6 | 7 | 8 |
|------------|-------------|-------------|-------------|-------------|-------------|
| X | 0.542-0.553 | 0.552-0.563 | 0.562-0.573 | 0.572-0.583 | 0.582-0.593 |
| Y | 0.445-0.456 | 0.435-0.446 | 0.425-0.436 | 0.415-0.426 | 0.405-0.416 |

Notes:

1. Bin categories are established for classification of products. Products may not be available in all bin categories.
2. Tolerance for each intensity bin limit is $\pm 10\%$.

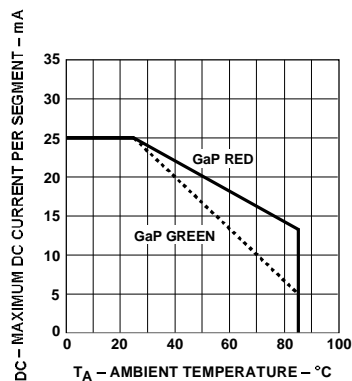


Figure 1. Maximum allowable average current per dot vs. ambient temperature.

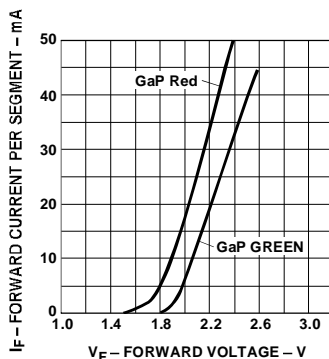


Figure 2. Forward current vs. forward voltage.

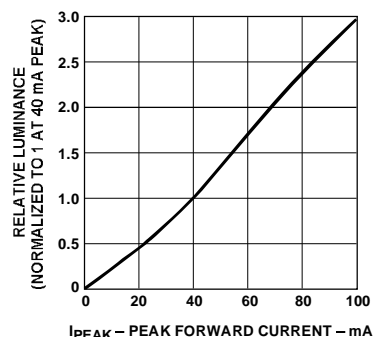


Figure 3. Relative luminance vs. peak forward current.

Contrast Enhancement

For information on contrast enhancement, please see Application Note 1015.

Soldering/Cleaning

Cleaning agents from the ketone family (acetone, methyl ethyl ketone, etc.) and from the chlorinated hydrocarbon family (methylene chloride, trichloroethylene, carbon tetrachloride, etc.) are not recommended for cleaning LED parts. All of these various solvents attack or dissolve the encapsulating epoxies used to form the package of plastic LED parts.

For information on soldering LEDs, please refer to Application Note 1027 and Note 1060.

Device Reliability

For reliability information, please see the reliability datasheet. *General Purpose 5 x 8 Dot Matrix Bi-Color Displays.*

www.agilent.com/semiconductors

For product information and a complete list of distributors, please go to our web site.

For technical assistance call:

Americas/Canada: +1 (800) 235-0312 or (408) 654-8675

Europe: +49 (0) 6441 92450

China: 10800 650 0017

Hong Kong: (+65) 271 2451

India, Australia, New Zealand: (+65) 271 2394

Japan: (+81 3) 3335-8152(Domestic/International), or 0120-61-1280(Domestic Only)

Korea: (+65) 271 2194

Malaysia, Singapore: (+65) 271 2054

Taiwan: (+65) 271 2654

Data subject to change.

Copyright © 2002 Agilent Technologies, Inc.

January 17, 2002

5988-2005EN



Agilent Technologies