

# T-1<sup>3</sup>/<sub>4</sub> Super Ultra-Bright LED Lamps

## Technical Data

**HLMP-8115**   **HLMP-8109**  
**HLMP-8205**   **HLMP-8209**  
**HLMP-8305**   **HLMP-8309**  
**HLMP-8405**   **HLMP-8409**  
**HLMP-8505**   **HLMP-8509**  
**HLMP-8605**

### Features

- **Very High Intensity**
- **Narrow and Medium Viewing Angles**
- **Untinted, Nondiffused Lens**
- **Choice of Five Colors**
- **Sturdy Leads with Seating Plane Tabs**

### Description


These untinted, nondiffused solid state lamps are designed with special internal optics to give a very high luminous intensity within a well defined viewing angle. The LED materials used within these devices is specifically grown to assure the high light output performance these lamps provide.




### Device Selection Guide

LED Color	Part Number	Typical Luminous Intensity (mcd @ 20 mA dc)	2 $\theta^{1/2}$ Viewing Angle
DH AS AlGaAs	HLMP-8115 HLMP-8109	1000 500	10° 20°
High Efficiency Red	HLMP-8205 HLMP-8209	350 260	10° 20°
Yellow	HLMP-8305 HLMP-8309	350 260	10° 20°
Orange	HLMP-8405 HLMP-8409	350 260	10° 20°
High Performance Green	HLMP-8505 HLMP-8509	400 300	10° 20°
Emerald Green	HLMP-8605	75	10°

## Package Dimensions

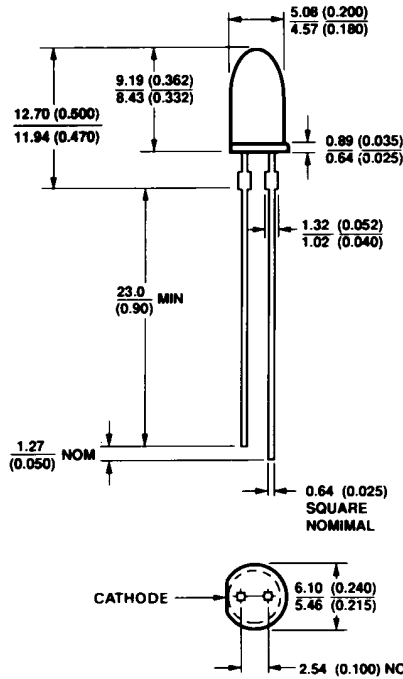

**HLMP-8115/-8X05**

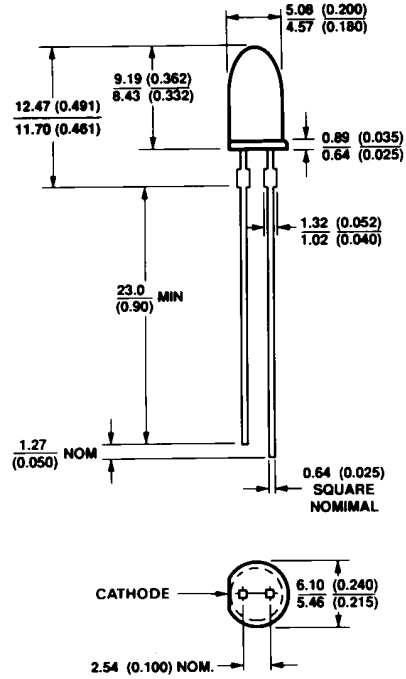

**HLMP-8X09**

**NOTES:**

1. ALL DIMENSIONS ARE IN MILLIMETRES (INCHES).
2. THE LEADS ARE MILD STEEL, SOLDER DIPPED.
3. AN EPOXY MENISCUS MAY EXTEND ABOUT 1 mm (0.040") DOWN THE LEADS.

## Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Parameter	DH AS AlGaAs Red	High Efficiency Red and Orange	Yellow	High Performance Green/Emerald Green	Units
DC Forward Current <sup>[1]</sup>	30	30	20	30	mA
Peak Forward Current <sup>[2]</sup>	300	90	60	90	mA
Average Forward Current <sup>[2]</sup>	20	25	20	25	mA
Transient Forward Current <sup>[3]</sup> (10 μs Pulse)	500	500	500	500	mA
Reverse Voltage (I <sub>R</sub> = 100 μA)	5	5	5	5	V
LED Junction Temperature	110	110	110	110	°C
Operating Temperature Range	-20 to + 100	-55 to + 100		-20 to + 100	°C
Storage Temperature Range	-55 to + 100				°C
Lead Soldering Temperature [1.6 mm (0.063 in.) from body]	260°C for 5 seconds				

**Notes:**

1. See Figure 5 for maximum current derating vs. ambient temperature.
2. See Figure 6 for maximum peak current vs. pulse duration and allowable duty factor.
3. The transient peak current is the maximum non-recurring peak current the device can withstand without damaging the LED die and wire bond. Do not operate these lamps at peak currents above the Absolute Maximum Peak Forward Current.

## Electrical/Optical Characteristics $T_A = 25^\circ\text{C}$

### DH AS AlGaAs HLMP-8115/8109

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Luminous Intensity HLMP-8115 HLMP-8109	$I_v$	500 200	1000 500		mcd	$I_F = 20\text{ mA}$
Forward Voltage	$V_F$		1.8	2.2	V	$I_F = 20\text{ mA}$
Reverse Breakdown Voltage	$V_R$	5.0	15.0		V	$I_R = 100\text{ }\mu\text{A}$
Included Angle Between Half Intensity Points HLMP-8115 HLMP-8109	$2\theta_{1/2}$		10 20		Deg.	
Total Luminous Flux	$\phi_d$		120		mlm	$I_F = 20\text{ mA}$
Peak Wavelength	$\lambda_{\text{PEAK}}$		645		nm	Measured at Peak
Dominant Wavelength <sup>[1]</sup>	$\lambda_d$		637		nm	
Spectral Line Half Width	$\Delta\lambda_{1/2}$		20		nm	
Speed of Response	$\tau_s$		30		ns	Time Constant, $e^{-t/\tau}$ s
Capacitance	C		30		pF	$V_F = 0$ , $f = 1\text{ MHz}$
Thermal Resistance	$R\theta_{J-\text{LEAD}}$		210		$^\circ\text{C/W}$	LED Junction-to-Cathode Lead
Luminous Efficacy <sup>[2]</sup>	$\eta_v$		80		lm/W	

### High Efficiency Red HLMP-8205/8209

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Luminous Intensity HLMP-8205 HLMP-8209	$I_v$	200 90	350 260		mcd	$I_F = 20\text{ mA}$
Forward Voltage	$V_F$		1.9	2.6	V	$I_F = 20\text{ mA}$
Reverse Breakdown Voltage	$V_R$	5.0	30.0		V	$I_R = 100\text{ }\mu\text{A}$
Included Angle Between Half Intensity Points HLMP-8205 HLMP-8209	$2\theta_{1/2}$		10 20		Deg.	
Total Luminous Flux	$\phi_v$		45		mlm	$I_F = 20\text{ mA}$
Peak Wavelength	$\lambda_{\text{PEAK}}$		635		nm	Measured at Peak
Dominant Wavelength <sup>[1]</sup>	$\lambda_d$		626		nm	
Spectral Line Half Width	$\Delta\lambda_{1/2}$		40		nm	
Speed of Response	$\tau_s$		90		ns	
Capacitance	C		11		pF	$V_F = 0$ , $f = 1\text{ MHz}$
Thermal Resistance	$R\theta_{J-\text{LEAD}}$		210		$^\circ\text{C/W}$	LED Junction-to-Cathode Lead
Luminous Efficacy <sup>[2]</sup>	$\eta_v$		145		lm/W	

**Yellow HLMP-8305/8309**

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Luminous Intensity HLMP-8305 HLMP-8309	$I_v$	212 96	350 260		mcd	$I_F = 20 \text{ mA}$
Forward Voltage	$V_F$		2.1	2.6	V	$I_F = 20 \text{ mA}$
Reverse Breakdown Voltage	$V_R$	5.0	30.0		V	$I_R = 100 \mu\text{A}$
Included Angle Between Half Intensity Points HLMP-8305 HLMP-8309	$2\theta_{1/2}$		10 20		Deg.	
Total Luminous Flux	$\phi_v$		45		lm	$I_F = 20 \text{ mA}$
Peak Wavelength	$\lambda_{\text{PEAK}}$		583		nm	Measured at Peak
Dominant Wavelength <sup>[1]</sup>	$\lambda_d$		585		nm	
Spectral Line Half Width	$\Delta\lambda_{1/2}$		36		nm	
Speed of Response	$\tau_s$		90		ns	
Capacitance	C		15		pF	$V_F = 0, f = 1 \text{ MHz}$
Thermal Resistance	$R\theta_{\text{J-LEAD}}$		210		°C/W	LED Junction-to-Cathode Lead
Luminous Efficacy <sup>[2]</sup>	$\eta_v$		500		lm/W	

**Orange HLMP-8405/8409**

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Luminous Intensity HLMP-8405 HLMP-8409	$I_v$	200 90	350 260		mcd	$I_F = 20 \text{ mA}$
Forward Voltage	$V_F$		1.9	2.6	V	$I_F = 20 \text{ mA}$
Reverse Breakdown Voltage	$V_R$	5.0	30.0		V	$I_R = 100 \mu\text{A}$
Included Angle Between Half Intensity Points HLMP-8405 HLMP-8409	$2\theta_{1/2}$		10 20		Deg.	
Total Luminous Flux	$\phi_v$		45		lm	$I_F = 20 \text{ mA}$
Peak Wavelength	$\lambda_{\text{PEAK}}$		600		nm	Measured at Peak
Dominant Wavelength <sup>[1]</sup>	$\lambda_d$		602		nm	
Spectral Line Half Width	$\Delta\lambda_{1/2}$		40		nm	
Speed of Response	$\tau_s$		280		ns	
Capacitance	C		4		pF	$V_F = 0, f = 1 \text{ MHz}$
Thermal Resistance	$R\theta_{\text{J-LEAD}}$		210		°C/W	LED Junction-to-Cathode Lead
Luminous Efficacy <sup>[2]</sup>	$\eta_v$		380		lm/W	

**High Performance Green HLMP-8505/8509**

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Luminous Intensity HLMP-8505 HLMP-8509	$I_v$	170 111	400 300		mcd	$I_F = 20 \text{ mA}$
Forward Voltage	$V_F$		2.2	3.0	V	$I_F = 20 \text{ mA}$
Reverse Breakdown Voltage	$V_R$	5.0	30		V	$I_R = 100 \mu\text{A}$
Included Angle Between Half Intensity Points HLMP-8505 HLMP-8509	$2\theta_{1/2}$		10 20		Deg.	
Total Luminous Flux	$\phi_v$		115		lm	$I_F = 20 \text{ mA}$
Peak Wavelength	$\lambda_{\text{PEAK}}$		568		nm	Measured at Peak
Dominant Wavelength <sup>[1]</sup>	$\lambda_d$		570		nm	
Spectral Line Half Width	$\Delta\lambda_{1/2}$		28		nm	
Speed of Response	$\tau_s$		260		ns	
Capacitance	C		18		pF	$V_F = 0, f = 1 \text{ MHz}$
Thermal Resistance	$R\theta_{\text{J-LEAD}}$		210		°C/W	LED Junction-to-Cathode Lead
Luminous Efficacy <sup>[2]</sup>	$\eta_v$		595		lm/W	

**Notes:**

1. The dominant wavelength,  $\lambda_d$ , is derived from the CIE Chromaticity Diagram and represents the color of the device.
2. The radiant intensity,  $I_e$ , in watts per steradian, may be found from the equation  $I_e = I_v/\eta_v$ , where  $I_v$  is the luminous intensity in candelas and  $\eta_v$  is the luminous efficacy in lumens/watt.

**Emerald Green HLMP-8605<sup>[1]</sup>**

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Luminous Intensity HLMP-8605	$I_v$	69	75		mcd	$I_F = 20 \text{ mA}$
Forward Voltage	$V_F$		2.2	3.0	V	$I_F = 20 \text{ mA}$
Reverse Breakdown Voltage	$V_R$	5.0	30		V	$I_R = 100 \mu\text{A}$
Included Angle Between Half Intensity Points HLMP-8605	$2\theta_{1/2}$		10		Deg.	
Peak Wavelength	$\lambda_{\text{PEAK}}$		558		nm	Measured at Peak
Dominant Wavelength <sup>[2]</sup>	$\lambda_d$		560		nm	
Spectral Line Half Width	$\Delta\lambda_{1/2}$		24		nm	
Speed of Response	$\tau_s$		3100		ns	
Capacitance	C		35		pF	$V_F = 0, f = 1 \text{ MHz}$
Thermal Resistance	$R\theta_{\text{J-LEAD}}$		210		°C/W	LED Junction-to-Cathode Lead
Luminous Efficacy <sup>[3]</sup>	$\eta_v$		656		lm/W	

**Notes:**

1. Please refer to Application Note 1061 for information comparing standard green and emerald green light output degradation.
2. The dominant wavelength,  $\lambda_d$ , is derived from the CIE Chromaticity Diagram and represents the color of the device.
3. The radiant intensity,  $I_e$ , in watts per steradian, may be found from the equation  $I_e = I_v/\eta_v$ , where  $I_v$  is the luminous intensity in candelas and  $\eta_v$  is the luminous efficacy in lumens/watt.

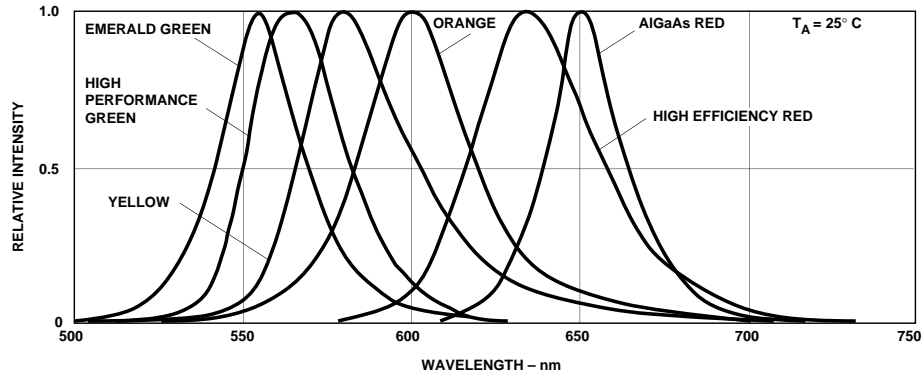


Figure 1. Relative Intensity vs. Wavelength.

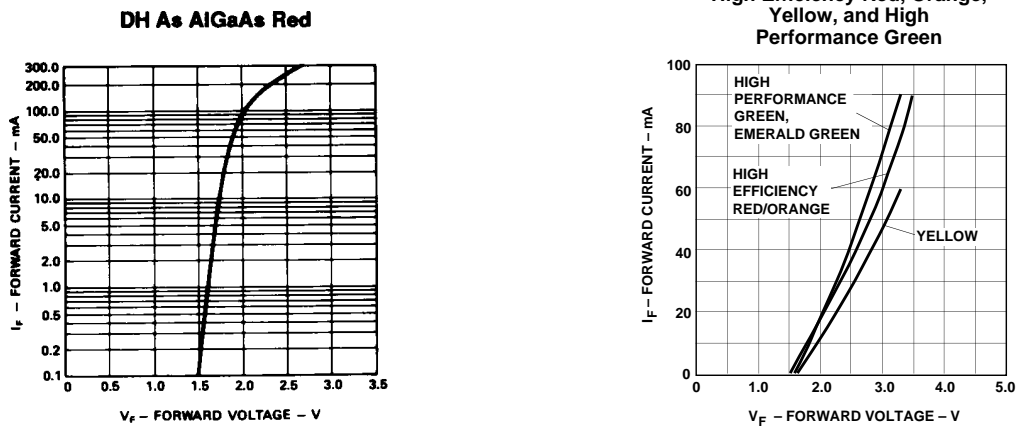


Figure 2. Forward Current vs. Forward Voltage (Non-Resistor Lamp).

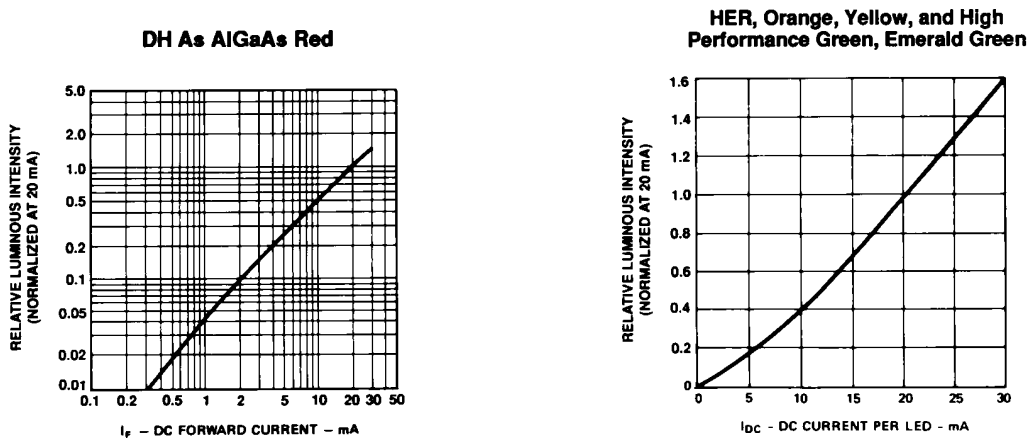


Figure 3. Relative Luminous Intensity vs. Forward Current.

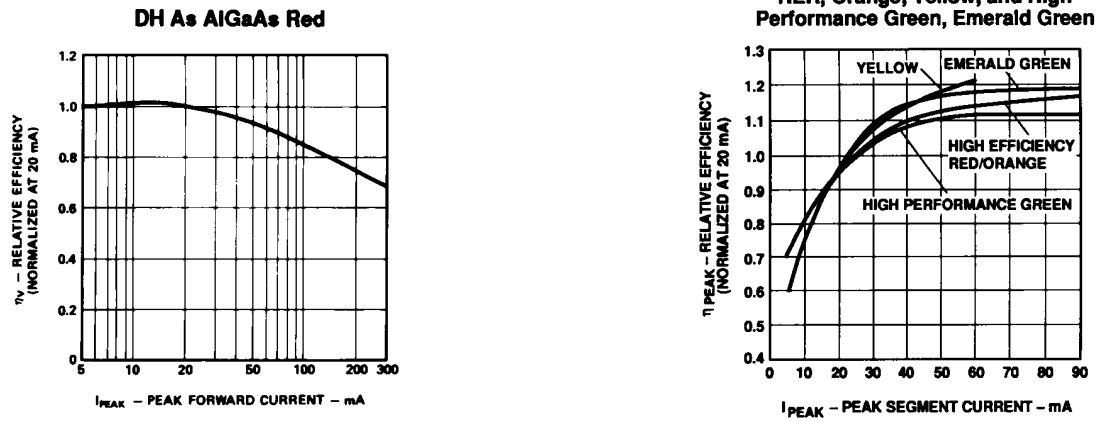


Figure 4. Relative Efficiency (Luminous Intensity per Unit Current) vs. Peak Current.

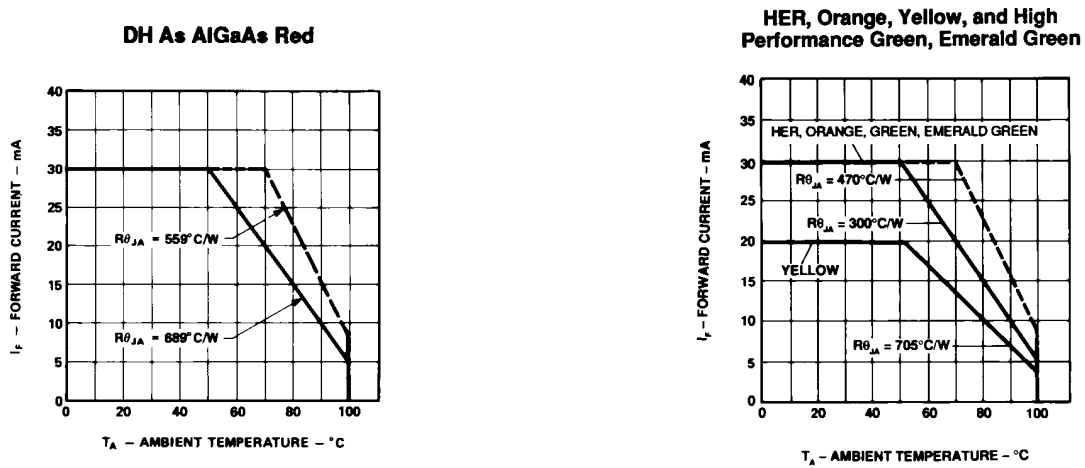


Figure 5. Maximum Forward dc Current vs. Ambient Temperature. Derating Based on  $T_J \text{ MAX} = 110^\circ\text{C}$ .

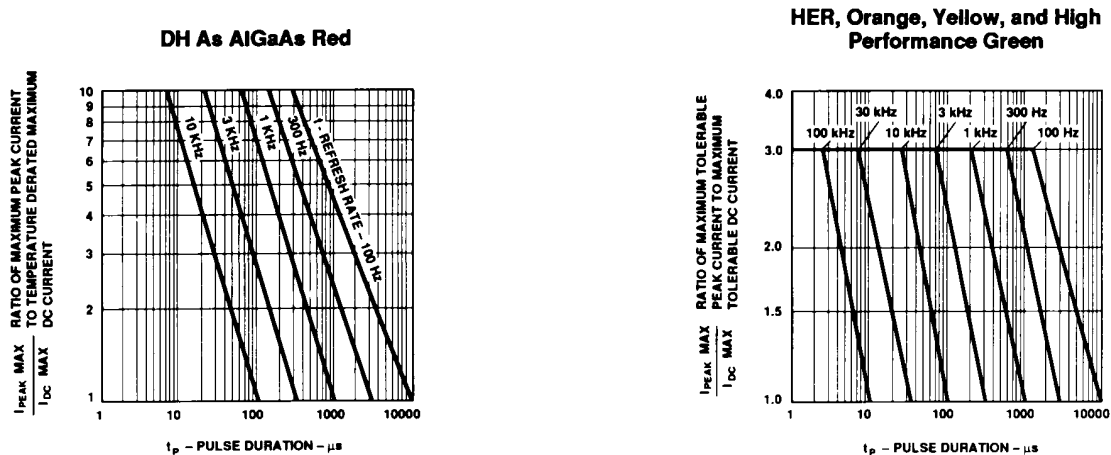
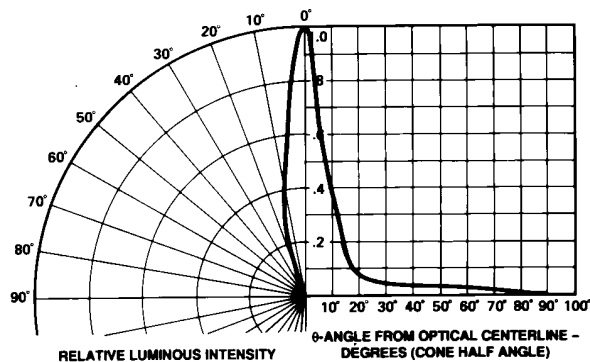
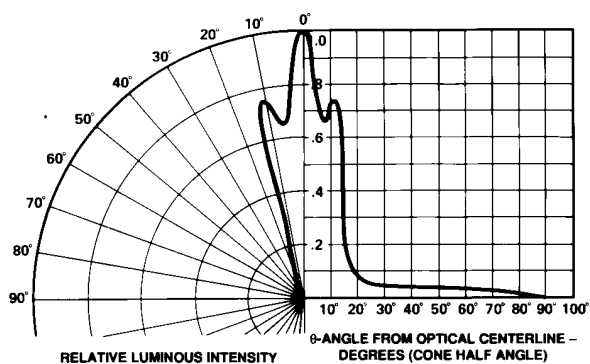


Figure 6. Maximum Tolerable Peak Current vs. Pulse Duration. ( $I_{DC} \text{ MAX}$  as per MAX Ratings).



**Figure 7. Relative Luminous Intensity vs. Angular Displacement. HLMP-8115/-8X05.**



**Figure 8. Relative Luminous Intensity vs. Angular Displacement. HLMP-8X09.**

For technical assistance or the location of your nearest Hewlett-Packard sales office, distributor or representative call:

**Americas/Canada:** 1-800-235-0312 or 408-654-8675

**Far East/Australasia:** (65) 290-6305

**Japan:** (81 3) 3331-6111

**Europe:** Call your local HP sales office listed in your telephone directory. Ask for a Components representative.

Data subject to change.

Copyright © 1996 Hewlett-Packard Co.

Obsoletes 5091-8548E

Printed in U.S.A. 5964-9370E (4/96)