
14 PIN DFB Laser Module with Cooler

Technical Data

LSC2210

Features

- **>1 Milliwatt Optical Output**
- **Center Wavelength between 1520 nm and 1565 nm**
- **Modulation Capability up to 1 Gbit/s**
- **Wide Operating Temperature Range: -20°C to +65°C**
- **Industry Standard Hermetic 14 PIN Dual-In-Line Package**


Applications

- **Telecommunications**
- **Fiber Optic Sensors**
- **Cable Television**
- **Military Communications and Control Systems**
- **Instrumentation**

Description

LSC2210 laser modules are highly reliable fiber optic light sources operating in the 1550 nanometer band. The internal DFB lasers are based upon InGaAsP ridge waveguide technology and fabricated by the Metal Organic Vapor Phase Epitaxy (MOVPE) process, resulting in long lifetimes and modest threshold currents.


The LSC2210 package includes a photodiode for monitoring the laser output, a thermistor for monitoring laser heatsink temperature, and a Peltier effect thermoelectric cooler (TEC). A heatsink mounting flange is incorporated into the industry standard 14 PIN package.

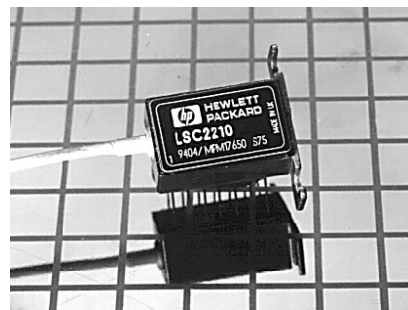


Laser Safety Warning

This device is a Class IIIb (3b) Laser Product. It may emit invisible laser radiation if operated with the fiber pigtail disconnected. To avoid possible eye damage do not look into an unconnected fiber pigtail during laser operation. Do not exceed specified operating limits.





LSC2210 Pin Connections and Block Diagram Bottom View

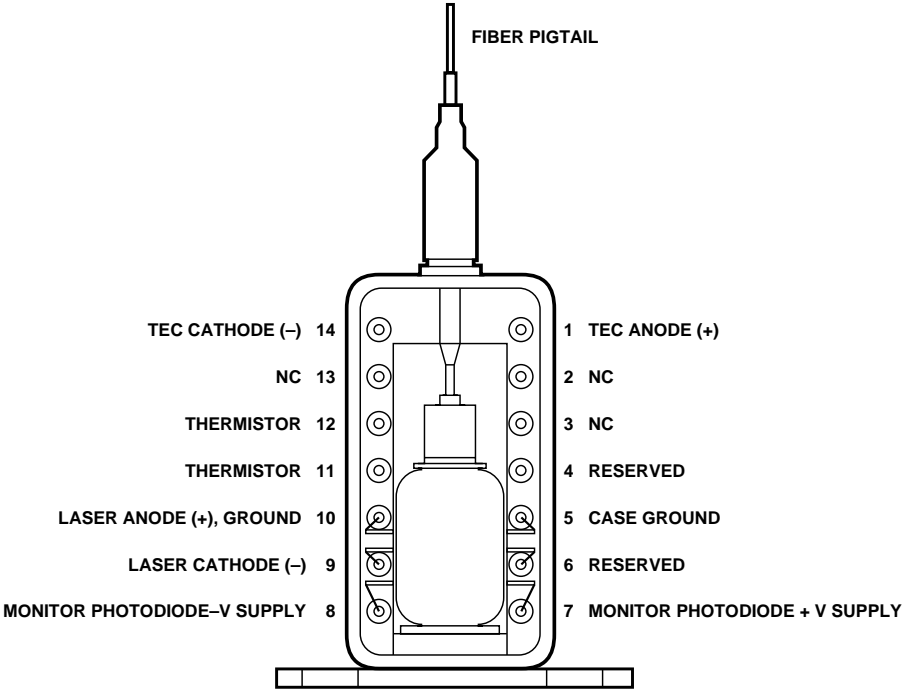

LSC2210 Mechanical Outline

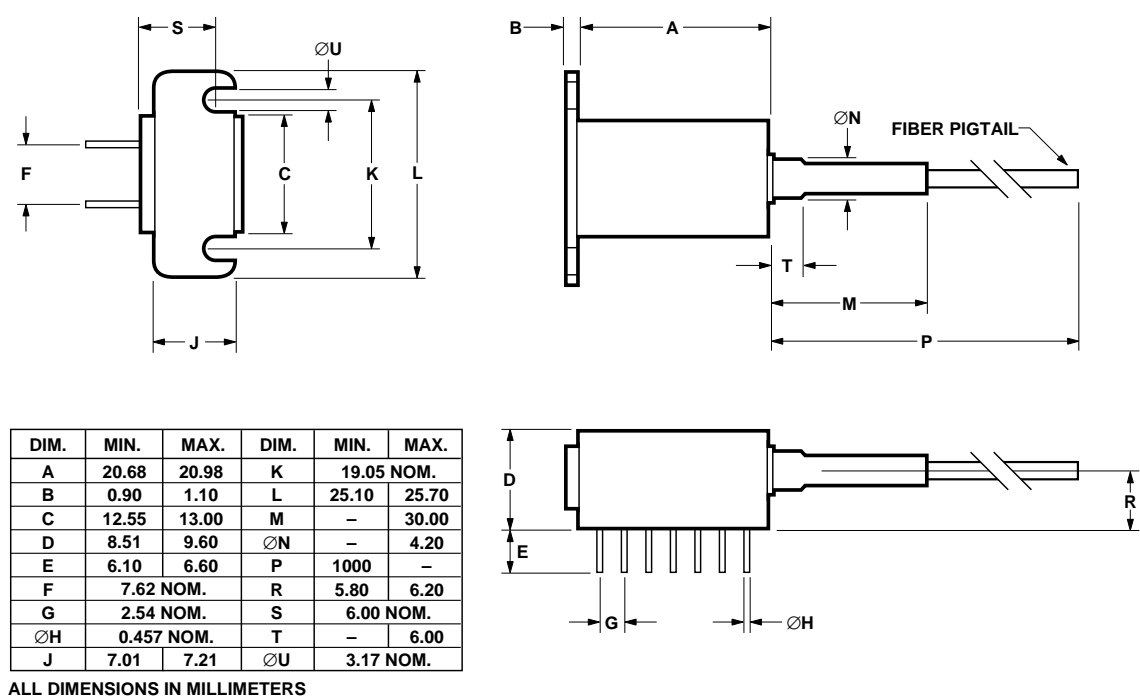

LSC2210 Typical Operating Characteristics

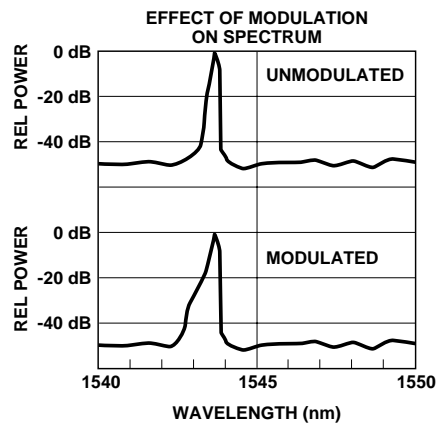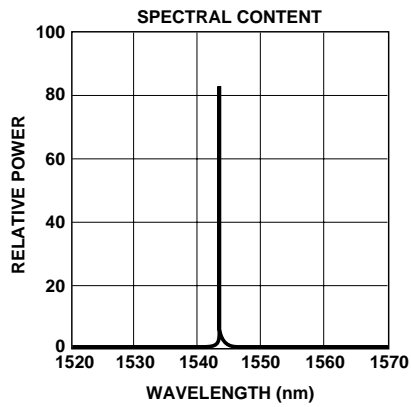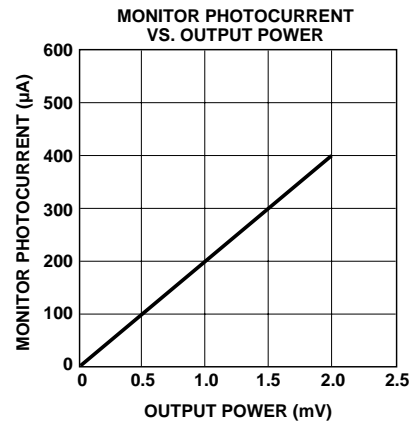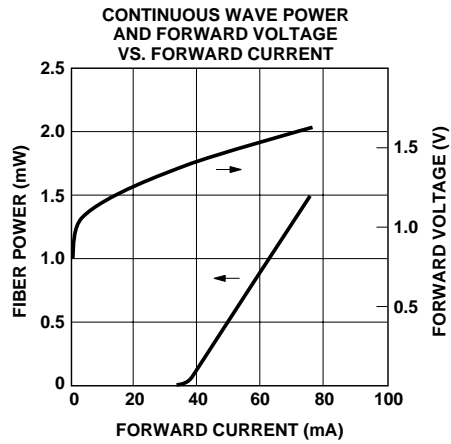

Absolute Maximum Ratings at 25°C

Absolute maximum limits mean that no catastrophic damage will occur if the product is subjected to these ratings for short periods, provided each limiting parameter is in isolation and all other parameters have values within the performance specification. It should not be assumed that limiting values of more than one parameter can be applied to the product at the same time.

| Parameter | Minimum | Maximum | Units |
|--------------------------------------|--|---------|-------|
| Laser Forward Current | - | 150 | mA |
| Laser Reverse Current | - | 10 | μA |
| Laser Reverse Voltage | - | 2.0 | V |
| Photodiode Forward Current | - | 1 | mA |
| Photodiode Reverse Voltage (V_R) | - | -10 | V |
| Fiber Pull Strength | - | 10 | N |
| Operating Temperature (Case) | -20 | +65 | °C |
| Storage Temperature | -40 | +85 | °C |
| Mechanical Shock | Mil Std 883, Method 2002, Test Condition B | | |
| Vibration | Mil Std 883, Method 2007, Test Condition A | | |

Performance Specification - Laser [1]

| Parameter | Minimum | Maximum | Units |
|--|---------|---------|-------|
| Threshold Current (I_{th}) | - | 60 | mA |
| Fiber Output Power (P_f) at $I_{th} + 40$ mA | 1 | - | mW |
| | 0 | - | dBm |
| Rise Time: 10% to 90%; I_{th} to $I_{th} + 25$ mA | - | 0.4 | ns |
| Fall Time: 90% to 10%; $I_{th} + 25$ mA to I_{th} | - | 0.4 | ns |
| Peak Wavelength | 1520 | 1565 | nm |
| Spectral Width (-20 dB, >20 dB ORL) [2], Modulated [3] | - | 0.8 | nm |
| Temperature Dependence of Peak Wavelength | - | 0.10 | nm/°C |
| Sidemodes (CW) | - | -30 | dB |
| Sidemodes (Modulated) [3] | - | -30 | dB |

Notes:

1. At 25°C and $P_f = 1$ mW unless otherwise specified.
2. As measured using optical spectrum analysis.
3. Measured at 565 Mbit/s, $I_{th} - 2$ mA = "0" level. $I_{th} + 40$ mA = "1" level.

Performance Specification - Monitor Photodiode

| Parameter | Minimum | Maximum | Units |
|---|---------|-----------|-----------------|
| Photocurrent (I_m) at 1 mW | 0.05 | - | mA |
| Responsivity ($\Delta I_m / \Delta P_f$) at $V_r = -5$ V | 0.05 | - | $\mu A / \mu W$ |
| Temperature Dependence of Responsivity ^[1] (from -20°C to 65°C, with Respect to 25°C) | - | ± 0.5 | dB |
| Dark Current ($V_r = -5$ V) at 25°C at 65°C | - | 15 | nA |
| | - | 1.0 | μA |

Thermistor

| Parameter | Symbol | Test Conditions $T_c = 25^\circ\text{C}$, $P_f = 0$ mW unless otherwise specified | Test Limits | | Units |
|----------------------------------|-------------------------|--|-------------|------|------------|
| | | | Min. | Max. | |
| Resistance | R_t | | 9.5 | 10.5 | k Ω |
| Temperature Coefficient of R_t | $\Delta R_t / \Delta T$ | | Typ4.4 | | %dR/K |
| β Constant | β | 0°C to 50°C | Typ3900 | | °K |

TEC

| Parameter | Symbol | Test Conditions $T_c = 25^\circ\text{C}$, $P_f = 1$ mW unless otherwise specified | Test Limits | | Units |
|---------------------|--------|--|-------------|------|-------|
| | | | Min. | Max. | |
| TEC Cooling Current | I_c | $\Delta T = -40^\circ\text{C}$, $T_c = 65^\circ\text{C}$ | - | 1.0 | A |
| TEC Heating Current | I_h | $\Delta T = 45^\circ\text{C}$, $T_c = -20^\circ\text{C}$ | - | 1.0 | A |
| Voltage | V_c | $\Delta T = -20^\circ\text{C}$ to $+65^\circ\text{C}$ | - | 2.0 | V |

Fiber Pigtail: Tight jacketed, self-mode stripping, single mode fiber

| Parameter | Minimum | Maximum | Units |
|------------------------------|---------|---------|---------|
| Length | 1.0 | - | m |
| Spot Size (mode radius) | 4.5 | 5.5 | μm |
| Cladding Diameter | 122 | 128 | μm |
| Core/Cladding Concentricity | - | 1.0 | μm |
| Secondary Jacket Diameter | 0.8 | 1.0 | mm |
| Effective Cut-off Wavelength | 1150 | 1240 | nm |

Hewlett-Packard can offer a ruggedized fiber pigtail for this product range if extreme mechanical strength is required. The pigtail length can be customized to your specific length, with a connector, to a tolerance of ± 25 mm.

Note:

1. Fiber output power change for constant monitor output current.

Ordering Information

LSC2210-XX

Connector Type:
FP=FC/PC Polish
ST=ST®

Model Name:
LSC2210

Handling Precautions

1. The LSC2210 can be damaged by current surges or overvoltage.
2. Power supply transient precautions should be taken.
3. Normal handling precautions for electrostatic sensitive devices should be taken.

CDRH Certification

Hewlett-Packard Ltd
Whitehouse Road
Ipswich, Suffolk IP1 5PE
England

Manufactured _____ Serial No. _____

Model No. _____

This product conforms to the applicable requirements
of 21 CFR 1040 at the date of manufacture.

Laser Warning

