

# RF AMPLIFIER

## MODEL *TM6147*

Available as: TM6147, 4 Pin TO-8 (T4)  
 TN6147, 4 Pin Surface Mount (SM3)  
 FP6147, 4 Pin Flatpack (FP4)  
 BX6147, Connectorized Housing (H1)

### Features

- Medium Gain: 17 dB Typical
- High Output Power: +20 dBm Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

### Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 500 MHz	5 - 500 MHz
Gain (dB)	17	16.0 Min.
Power @ 1 dB Comp. (dBm)	+20	+17.5 Min.
Reverse Isolation (dB)	- 19	- 17 Max.
VSWR In	<1.75:1	2.0:1 Max.
Out	<1.5:1	2.0:1 Max.
Noise figure (dB)	<3.0	4.5 Max.
Power Vdc	+15	+15
mA	50	55 Max.

Note: Care should always be taken to effectively ground the case of each unit.


### Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point ..... +50 (Typ.)  
 Second Order Two Tone Intercept Point ..... +44 (Typ.)  
 Third Order Two Tone Intercept Point ..... +35 (Typ.)

### Maximum Ratings

Ambient Operating Temperature ..... -55°C to + 100 °C  
 Storage Temperature ..... -62°C to + 125 °C  
 Case Temperature ..... + 125 °C  
 DC Voltage ..... + 18 Volts  
 Continuous RF Input Power ..... + 13 dBm  
 Short Term RF Input Power ..... 50 Milliwatts  
 ..... (1 Minute Max.)  
 Maximum Peak Power ..... 0.5 Watt  
 ..... (3 µsec Max.)

### Typical Performance Data

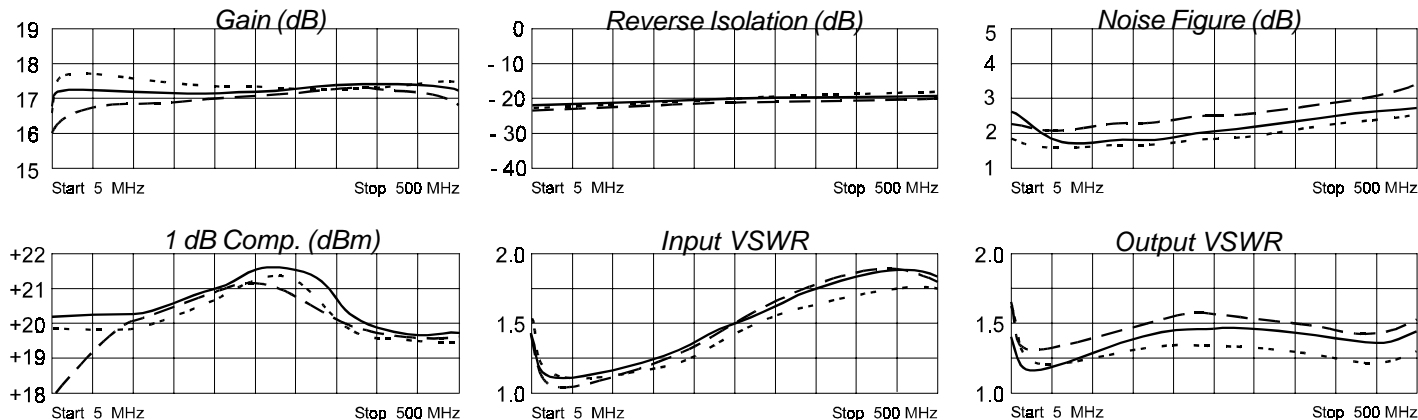

Legend ——— + 25 °C    - - - - + 85 °C    . . . . . -55 °C

### Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.16	- 76	6.84	-156	.09	-155	.15	- 33
50	.04	- 87	7.19	166	.09	163	.08	20
100	.07	- 94	7.15	148	.09	145	.12	23
200	.15	-123	7.16	114	.10	108	.18	3
300	.24	-159	7.21	80	.11	75	.18	- 30
400	.29	155	7.38	43	.11	41	.16	- 82
500	.29	89	7.30	1	.11	5	.19	-161

# Amplifonix

2707 Black Lake Place, Philadelphia, PA 19154

TEL 215-464-4000 • • • • FAX 215-464-4001