

RF AMPLIFIER

MODEL *TM7278*

Available as: TM7278, 4 Pin TO-8 (T4)
 TN7278, 4 Pin Surface Mount (SM3)
 FP7278, 4 Pin Flatpack (FP4)
 BX7278, Connectorized Housing (H1)

Features

- High Output Power: +21.5 dBm Typical
- High Third Order Intercept: +36 dBm Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 300 MHz	5 - 300 MHz
Gain (dB)	13.5	12.5 Min.
Power @ 1 dB Comp. (dBm)	+21.5	+19.0 Min.
Reverse Isolation (dB)	- 15	- 14 Max.
VSWR In	<1.25:1	2.0:1 Max.
Out	<1.5:1	2.0:1 Max.
Noise figure (dB)	4	5.5 Max.
Power Vdc	+15	+15
mA	65	75 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point +55 (Typ.)
 Second Order Two Tone Intercept Point +49 (Typ.)
 Third Order Two Tone Intercept Point +36 (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts
 (1 Minute Max.)
 Maximum Peak Power 0.5 Watt
 (3 µsec Max.)

Typical Performance Data

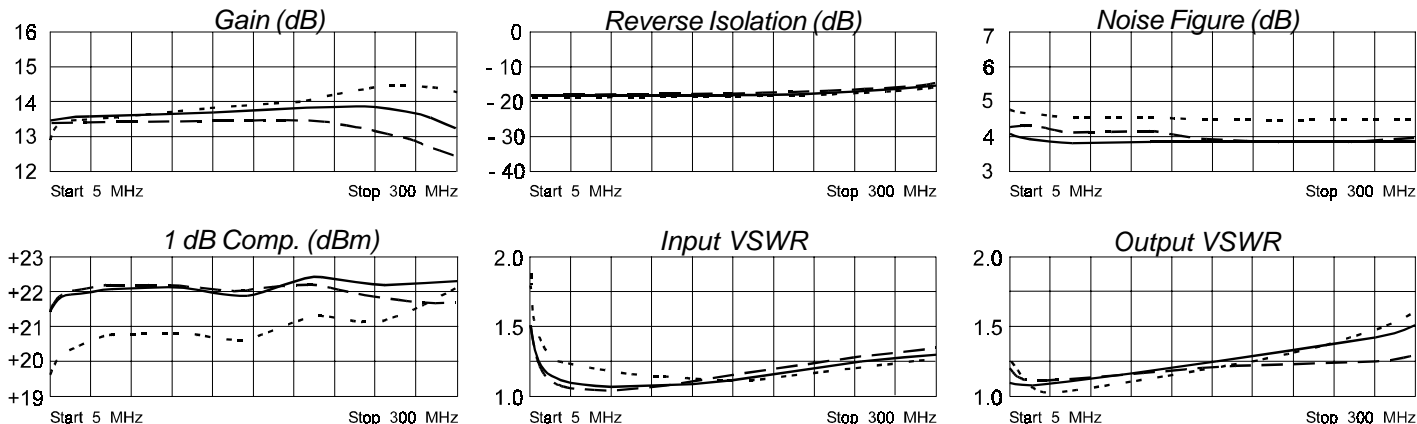

Legend ——— + 25 °C - - - + 85 °C -55 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.20	-92	4.67	-162	.13	6	.07	135
20	.06	-140	4.80	178	.13	2	.05	174
50	.04	160	4.80	165	.13	2	.05	-159
100	.05	97	4.84	147	.14	3	.08	-149
150	.06	44	4.90	128	.14	2	.11	-161
200	.09	2	4.95	108	.15	2	.14	176
250	.12	-37	4.92	85	.16	-2	.16	137
300	.14	-72	4.61	58	.18	-7	.21	84

Amplifonix

2707 Black Lake Place, Philadelphia, PA 19154

TEL 215-464-4000 • • • • FAX 215-464-4001 3/18/03