


■ Features

$$I_O = 100\text{mA}$$

$$V_R = 80\text{V}$$

- Designed for mounting on small surface.
- High speed switching.
- High mounting capability, strong surge withstand, high reliability.
- Extremely thin package.
- Lead-free device




■ Mechanical Data

- Case : 0603(1608) 1005(2512) standard package, molded plastic.
- Terminals : Gold plated, solderable per MIL-STD-750, method 2026.
- Polarity : Indicated by cathode band.
- Mounting position : Any.
- Weight : BD:0.003gram (approximately)
BF:0.006gram (approximately)


■ General Description

0603(1608)

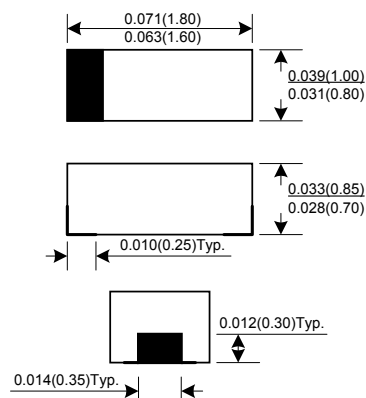


Dimensions in inches and (millimeter)

1005(2512)

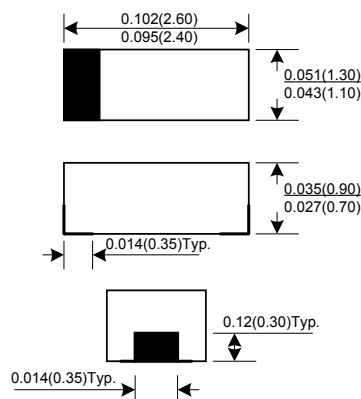

Dimensions in inches and (millimeter)

■ Ordering information

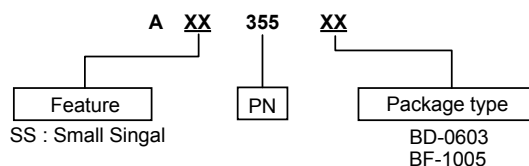

**■ Maximum Rating** (at $T_A=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter		Conditions	Min	Typ	Max	Unit
V_{RRM}	Repetitive peak reverse voltage			-	-	90	V
V_R	Reverse voltage			-	-	80	V
I_O	Average forward current			-	-	100	mA
I_{FSM}	Forward current, surge peak	0603	8.3ms single half sine-wave superimposed on rate load (JEDEC method)	-	1000	-	mA
		1005		-	1000	-	
P_D	Power Dissipation	0603		-	-	150	mW
		1005		-	-	300	
I_{FRM}	Repetitive peak forward current			-	-	225	mA
T_{STG}	Storage temperature			-40	-	+125	$^{\circ}\text{C}$
T_j	Junction temperature			-40	-	+125	$^{\circ}\text{C}$

■ Electrical Characteristics (at $T_A=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_F	Forward voltage	$I_F=100\text{mA}$ DC	-	-	1.0	V
I_R	Reverse current	$V_R=80\text{V}$	-	-	0.1	μA
C_T	Capacitance between terminals	$F=1\text{MHz}$, and 0.5 VDC reverse voltage	-	3	-	pF
T_{rr}	Reverse recovery time	$V_R=6\text{V}$, $I_F=10\text{mA}$, $R_L=50\text{ohms}$	-	4	-	nS

Rating And Characteristic Curves

Fig. 1 - Forward characteristics

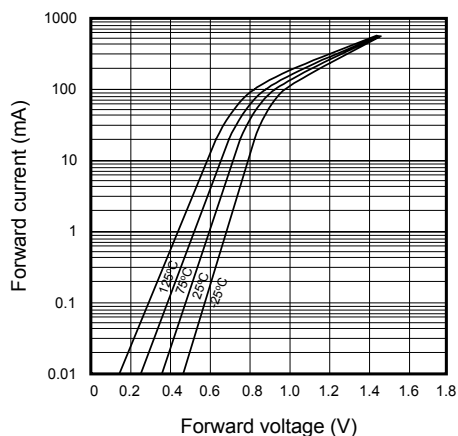


Fig. 2 - Reverse characteristics

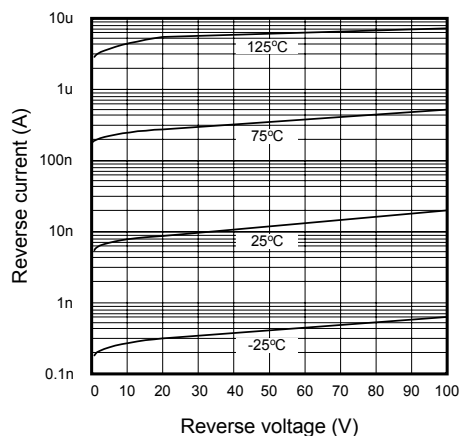


Fig. 3 - Capacitance between terminals characteristics


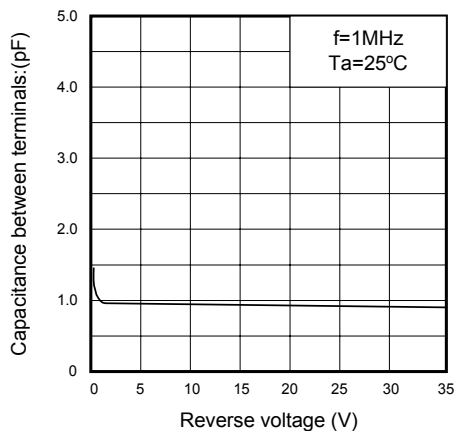


Fig. 4 - Current derating curve



Marking Information

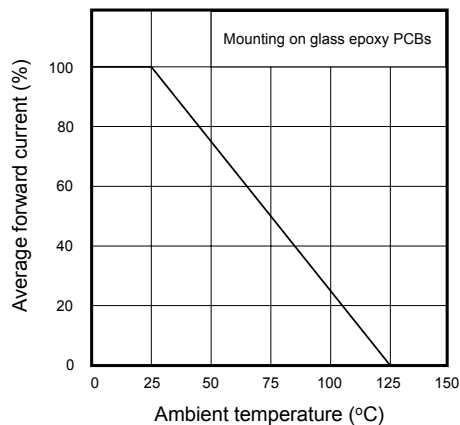