

## LPT50 Series

50 Watts

**Total Power:** 47 - 55 Watts  
**Input Voltage:** 90-264 VAC  
127-300 VDC  
**# of Outputs:** Triple



## Special Features

- Universal input
- 2" x 4" footprint
- Overpower and short circuit protection
- High efficiency
- High MTBF
- Built in EMI filter (CISPR 22 Class B)
- LED power good indicator
- Input power <74 watts
- Complies with EN61000-3-2
- UL Class I approved

## Safety

**UL** UL 60950-1  
**CSA** CSA-C22.2 No. 60950-1  
**TUV** EN60950-1  
**CB** Certificate and report  
**CE** LVD & EMC  
**CCC**

## Electrical Specifications

### Input

Input range	90-264 VAC (wide range) 127-300 VDC
Frequency	47-440 Hz
Inrush current	<60 A peak @ 230 VAC, cold start @ 25°C
Efficiency	80% typical at full load
EMI RFI	FCC Class B conducted; CISPR 22 Class B conducted: EN55022 Class B conducted
Safety ground leakage current	0.5mA @ 50/60 Hz, 264 VAC input

### Output

Maximum power	55 W for convection (LPT51, 47.4W)
Hold-up time	10/20 ms 115/230 VAC input line
Overpower protection	Short circuit protection on all outputs Case overpower protected @ 110-160% of normal rating
Overvoltage protection	30-50% above nominal output

## Environmental Specifications

Operating temperature:	0° to 50°C ambient. Derate each output 2.5% per degree from 50° to 70°C. -20°C start up
Storage temperature:	-40°C to +85°C
Electromagnetic susceptibility:	Designed to meet EN61000-4; -2, -3, -4, -5, -6, -8, -11 Level 3
Humidity:	Operating; non-condensing 10% to 95% RH
Vibration:	IEC68-2-6 to the levels of IEC721-3-2
MTBF demonstrated:	>550,000 hours at full load and 25°C ambient conditions



## Ordering Information

Model Number	Output Voltage	Minimum Load	Maximum Load with Convection Cooling	Peak Load <sup>1</sup>	Regulation <sup>2</sup>	Ripple P/P (PAR) <sup>3</sup>
LPT51	+3.3V	0.8A	8A	9A	±2%	50 mV
	+5V	0.1A	3A	4A	±6%	50mV
	+12V	0A	0.5A	1A	±5%	120mV
LPT52	+5V	0.5A	8A	9A	±2%	50 mV
	+12V	0.1A	3A	4A	±5%	120mV
	-12V	0A	0.5A	1.0A	±5%	120mV
LPT53	+5V	0.5A	8A	9A	±2%	50 mV
	+15V	0.1A	2.4A	3.2A	±5%	150mV
	-15V	0A	0.5A	0.7A	±5%	150mV
LPT54	+5V	0.5A	8A	9A	±2%	50 mV
	+24V	0.1A	1.5A	2A	±7%	240mV
	+12V	0A	0.5A	0.7A	±5%	120mV

1. Peak current lasting <15 seconds with a maximum 10% duty cycle.
2. At 25°C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.
3. Peak-to-peak with 20 MHz bandwidth and 10 µF (tantalum capacitor) in parallel with a 0.1 µF capacitor at rated line voltage and load ranges.

## Pin Assignments

Connector	LPT51	LPT52	LPT53	LPT54
SK1-1	Line	Line	Line	Line
SK1-3	Neutral	Neutral	Neutral	Neutral
SK2-1	+3.3 V	+5 V	+5V	+5V
SK2- 2	+2.3 V	+5 V	+5V	+5V
SK2- 3	Common	Common	Common	Common
SK2-4	Common	Common	Common	Common
SK2-5	12V	-12V	-15V	+12V
SK2-6	5V	+12V	+15V	+24

## Mating Connectors


**AC Input:** Molex 09-50-8031 (USA)  
09-91-0300 (UK)  
PINS: 08-52-0113

**DC Outputs:** Molex 09-50-8061 (USA)  
09-91-0600 (UK)  
PINS: 08-52-0113

Astec Connector Kit #70-841-006, includes all of the above

1. Specifications subject to change without notice.
2. All dimensions in inches (mm), tolerance is ±0.02" (±0.5mm)
3. Mounting holes M1 and M2 should be grounded for EMI purposes.
4. Mounting hole M1 is safety ground connection.
5. Specifications are for convection rating at factory settings at 115 VAC input, 25°C unless otherwise stated.
6. Warranty: 1 year
7. Weight: 0.45lbs/0.20kg

## Mechanical Drawing

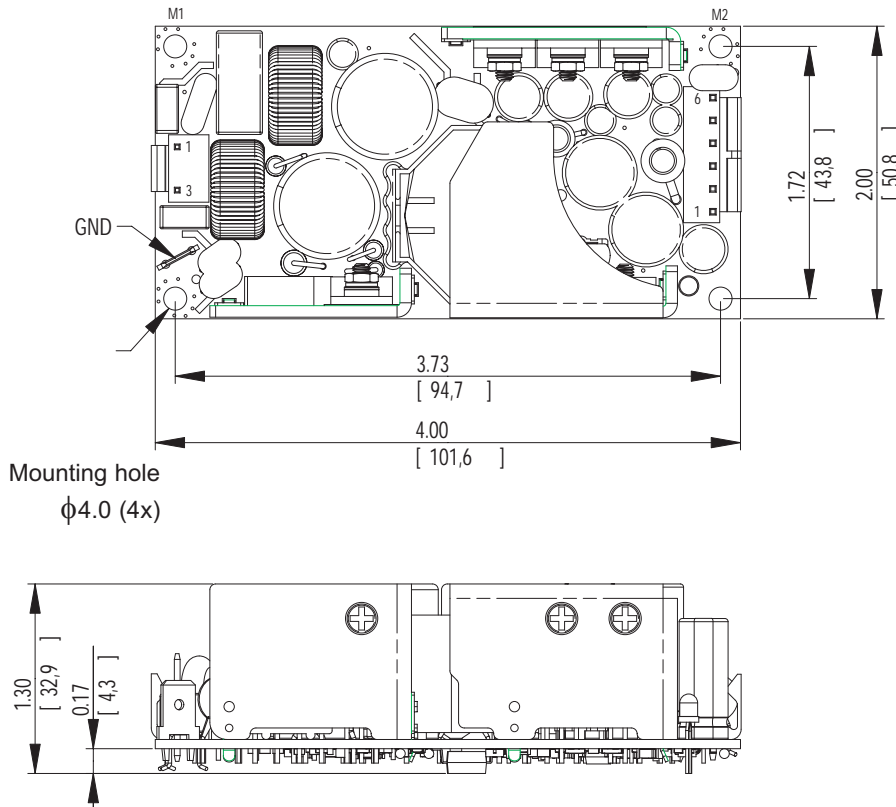

## Astec Power

5810 Van Allen Way  
Carlsbad, CA 92008  
USA  
Telephone: +1 760 930 4600  
Facsimile: +1 760 930 0698  
Technical Support: +1 888 41 ASTEC  
or +1 407 241 2752

Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX  
United Kingdom  
Telephone: +44 (0) 1384 842 211  
Facsimile: +44 (0) 1384 843 355

Units 2111-2116, Level 21  
Tower 1, Metroplaza  
223, Hing Fong Road  
Kwai Fong, New Territories  
Hong Kong  
Telephone: +852 2437 9662  
Facsimile: +852 2402 4426

For global contact, visit:

**[www.astecpower.com](http://www.astecpower.com)**  
**[technicalsupport@astec.com](mailto:technicalsupport@astec.com)**

While every precaution has been taken to ensure accuracy and completeness in this literature, Astec Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Printed in USA

## Emerson Network Power.

The global leader in enabling  
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Power**
- Inbound Power
- Integrated Cabinet Solutions
- Outside Plant
- Precision Cooling
- Site Monitoring and Services

**[EmersonNetworkPower.com](http://EmersonNetworkPower.com)**