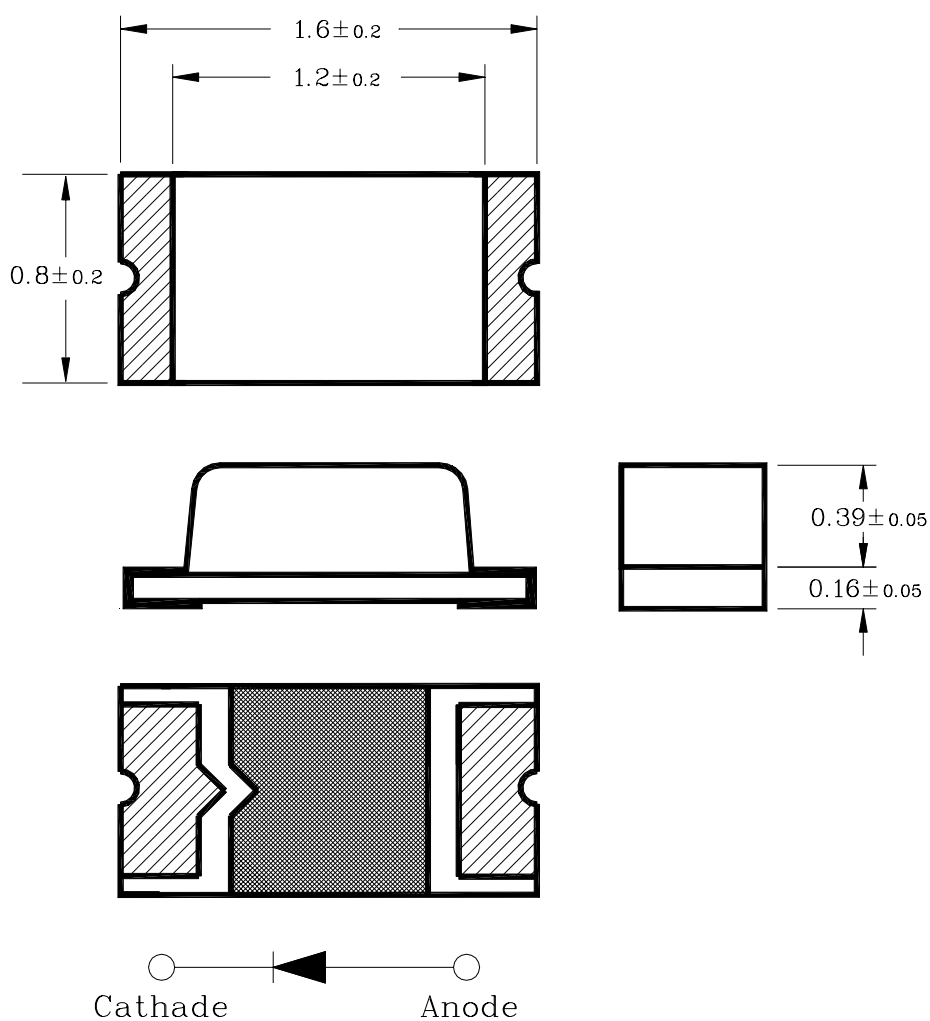


**Features**

- 1.6mm(L)×0.8mm small size surface mount type
- Thin package of 0.55mm(H) thickness
- Transparent clear lens optic
- Super luminosity

**Applications**

- LCD backlighting
- Keypad backlighting
- Symbol backlighting
- Front panel indicator lamp


**Outline Dimensions****unit : mm**

### Absolute maximum ratings

Characteristic	Symbol	Ratings	Unit
Power Dissipation	$P_D$	65	mW
Forward Current	$I_F$	25	mA
* <sup>1</sup> Peak Forward Current	$I_{FP}$	50	mA
Reverse Voltage	$V_R$	4	V
Operating Temperature	$T_{opr}$	-25 ~ 80	°C
Storage Temperature	$T_{stg}$	-30 ~ 100	°C
* <sup>2</sup> Soldering Temperature	$T_{sol}$	240°C for 5 seconds	

\*1.Duty ratio = 1/16, Pulse width = 0.1ms

\*2.Recommended soldering Temperature Profile

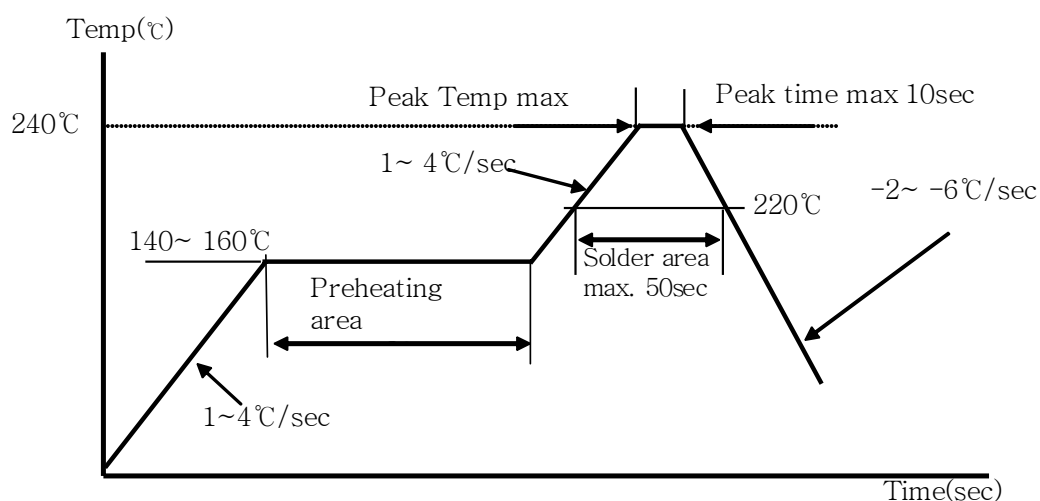

### Electrical Characteristics

Characteristic	Symbol		Test Condition	Min.	Typ.	Max.	Unit
Forward Voltage	$V_F$		$I_F = 20\text{mA}$	1.6	-	2.4	V
Luminous Intensity	$I_V$		$I_F = 20\text{mA}$	18	-	55	mcd
Peak Wavelength	$\lambda_P$		$I_F = 20\text{mA}$	-	660	-	nm
Spectrum Bandwidth	$\Delta\lambda$		$I_F = 20\text{mA}$	-	20	-	nm
Reverse Current	$I_R$		$V_R = 4\text{V}$	-	-	10	uA
* <sup>3</sup> Half Angle	$\theta_{1/2}$	X	$I_F = 20\text{mA}$	-	$\pm 65$	-	deg
		Y		-	$\pm 70$	-	

\*3.  $\theta_{1/2}$  is the off-axis angle where the luminous intensity is 1/2 the peak intensity

## Characteristic Diagrams

Fig. 1  $I_F - V_F$

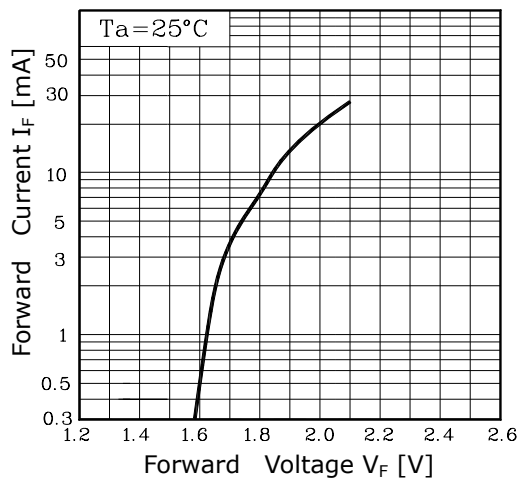


Fig. 2  $I_V - I_F$

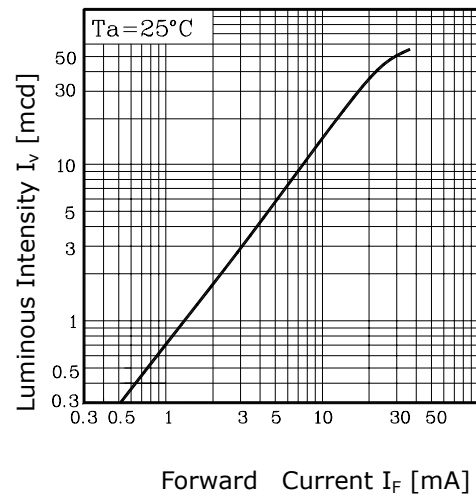


Fig. 3  $I_F - T_a$

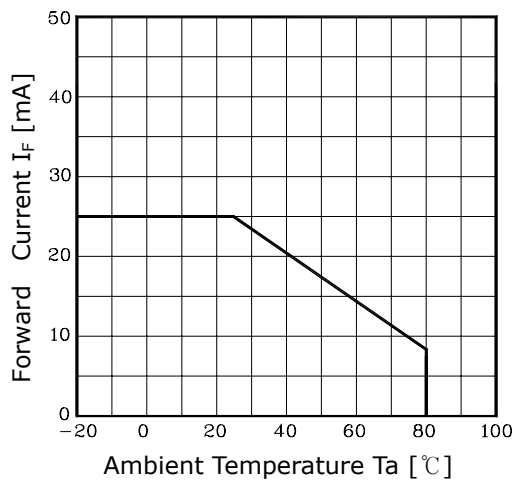


Fig.4 Spectrum Distribution

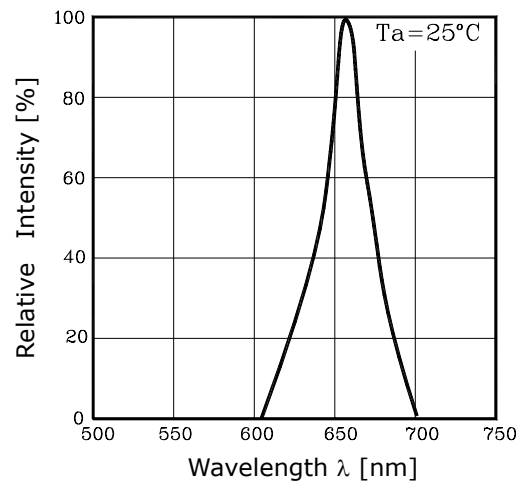


Fig. 5-1 Radiation Diagram(X)


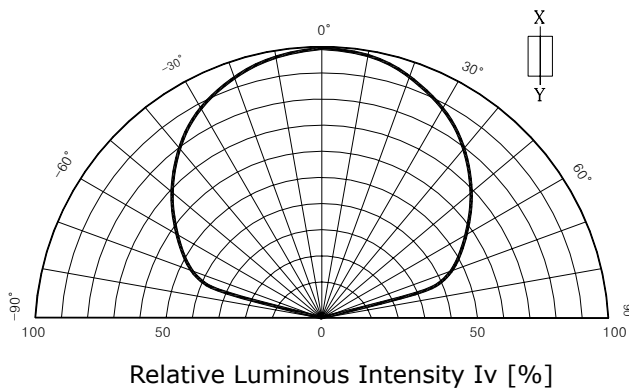


Fig. 5-2 Radiation Diagram(Y)

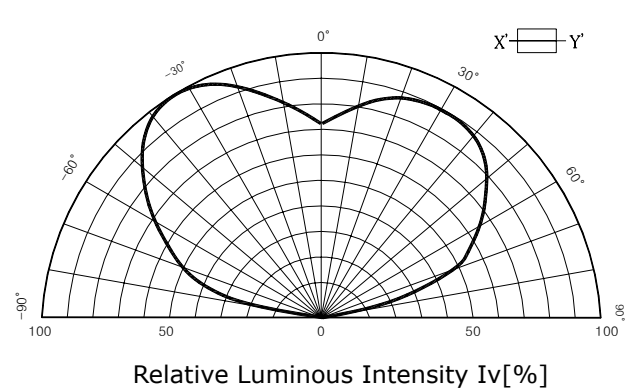

**These AUK products are intended for usage in general electronic equipments(Office and communication equipment, measuring equipment, domestic electrification, etc.).**

**Please make sure that you consult with us before you use these AUK products in equipments which require high quality and/or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, traffic signal, combustion central, all types of safety device, etc.).**

**AUK cannot accept liability to any damage which may occur in case these AUK products were used in the mentioned equipments without prior consultation with AUK.**