

DC-DC CONVERTER APPLICATION HIGH VOLTAGE SWITCHING APPLICATIONS

Features


- High Voltage: $BV_{DSS}=200V(\text{Min.})$
- Low C_{rss} : $C_{rss}=22pF(\text{Typ.})$
- Low gate charge : $Q_g=30nC(\text{Typ.})$
- Low $R_{DS(on)}$: $R_{DS(on)}=0.17\Omega(\text{Max.})$

Ordering Information

Type NO.	Marking	Package Code
STK1820F	STK1820	TO-220F-3L

Outline Dimensions

unit : mm

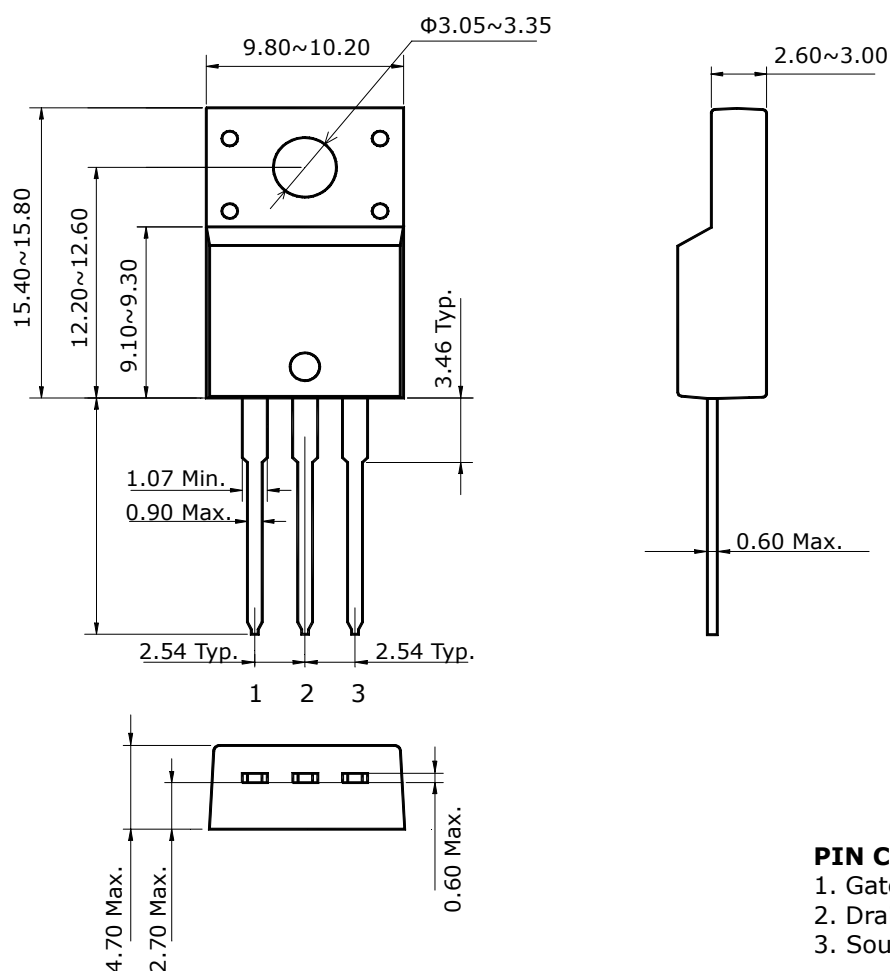

Absolute maximum ratings
(Tc=25°C)

Characteristic	Symbol		Rating	Unit
Drain-source voltage	V _{DSS}		200	V
Gate-source voltage	V _{GSS}		±30	V
Drain current (DC)	I _D	(Tc=25℃)	18	A
		(Tc=100℃)	8.6	A
Drain current (Pulsed) *	I _{DP}		72	A
Drain Power dissipation	P _D		30	W
Avalanche current (Single) ②	I _{AS}		18	A
Single pulsed avalanche energy ②	E _{AS}		396	mJ
Avalanche current (Repetitive) ①	I _{AR}		18	A
Repetitive avalanche energy ①	E _{AR}		13.9	mJ
Junction temperature	T _J		150	℃
Storage temperature range	T _{strg}		-55~150	

* Limited by maximum junction temperature

Characteristic		Symbol	Typ.	Max	Unit
Thermal resistance	Junction-case	$R_{th(J-C)}$	-	4.16	°C/W
	Junction-ambient	$R_{th(J-a)}$	-	62.5	

Electrical Characteristics
(Tc=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Drain-source breakdown voltage	BV_{DSS}	$I_D=250\mu A, V_{GS}=0$	200	-	-	V
Gate-threshold voltage	$V_{GS(th)}$	$I_D=250\mu A, V_{DS}=V_{GS}$	2.0	-	4.0	V
Drain-source leakage current	I_{DSS}	$V_{DS}=200V, V_{GS}=0V$	-	-	10	μA
Gate-source leakage	I_{GSS}	$V_{DS}=0V, V_{GS}=\pm 30V$	-	-	± 100	nA
Drain-Source on-resistance ④	$R_{DS(on)}$	$V_{GS}=10V, I_D=9A$	-	0.14	0.17	Ω
Forward transfer admittance ④	g_{fs}	$V_{DS}=40V, I_D=9A$	-	8.5	-	S
Input capacitance	C_{iss}	$V_{GS}=0V, V_{DS}=25V, f=1MHz$	-	840	1260	pF
Output capacitance	C_{oss}		-	150	225	
Reverse transfer capacitance	C_{rss}		-	22	33	
Turn-on delay time	$t_{d(on)}$	$V_{DD}=100V, I_D=18A$ $R_G=25\Omega$ ③④	-	24	36	ns
Rise time	t_r		-	29	43	
Turn-off delay time	$t_{d(off)}$		-	68	102	
Fall time	t_f		-	29	43	
Total gate charge	Q_g	$V_{DD}=100V, V_{GS}=10V$ $I_D=18A$ ③④	-	30	45	nC
Gate-source charge	Q_{gs}		-	4.8	7.2	
Gate-drain charge	Q_{gd}		-	11.5	17.3	

Source-Drain Diode Ratings and Characteristics
(Tc=25°C)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Continuous source current	I_S	Integral reverse diode in the MOSFET	-	-	18	A
Source current (Pulsed) ①	I_{SP}		-	-	72	
Forward voltage ④	V_{SD}	$V_{GS}=0V, I_S=18A$	-	-	1.4	V
Reverse recovery time	t_{rr}	$I_S=18A, V_{GS}=0V$ $di_s/dt=100A/\mu s$	-	253	-	ns
Reverse recovery charge	Q_{rr}		-	2.63	-	μC

Note ;

- ① Repetitive Rating : Pulse Width Limited by Maximum Junction Temperature μ
- ② $L=2.0mH, I_{AS}=18A, V_{DD}=50V, R_G=25\Omega$
- ③ Pulse Test : Pulse Width < 300 μs , Duty cycle $\leq 2\%$
- ④ Essentially independent of operating temperature

Electrical Characteristic Curves

Fig. 1 $I_D - V_{DS}$

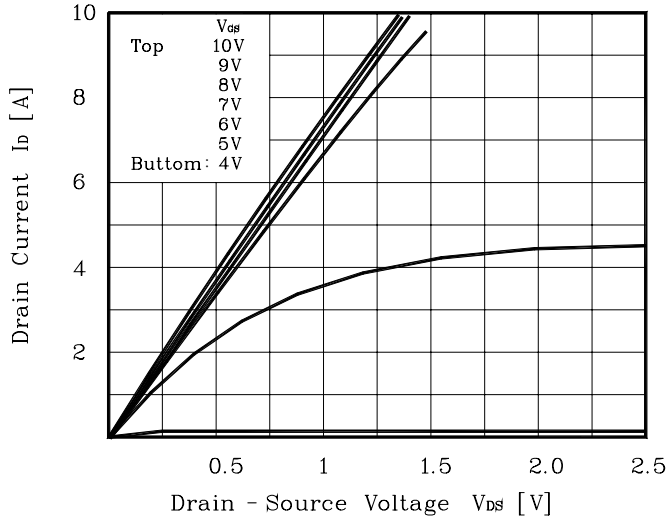


Fig. 2 $I_D - V_{GS}$

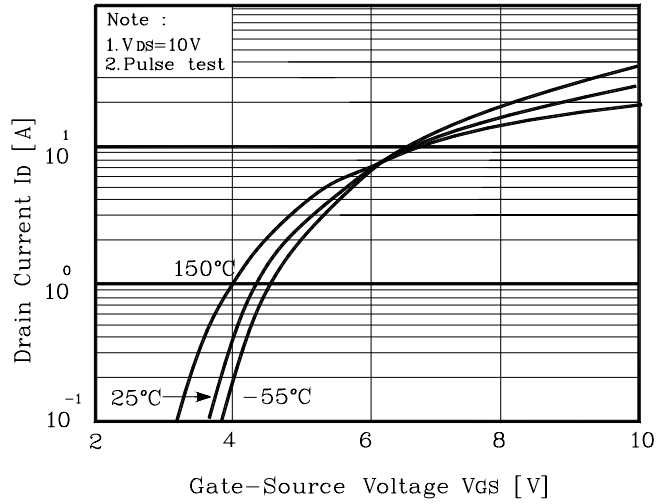


Fig. 3 $R_{DS(on)} - I_D$

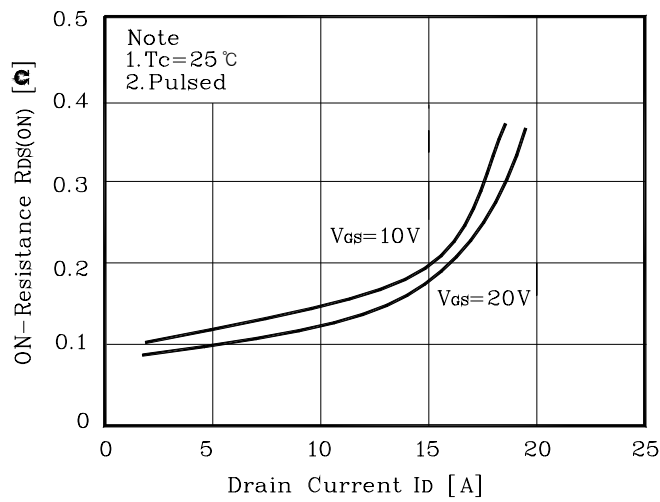


Fig. 4 $I_S - V_{SD}$

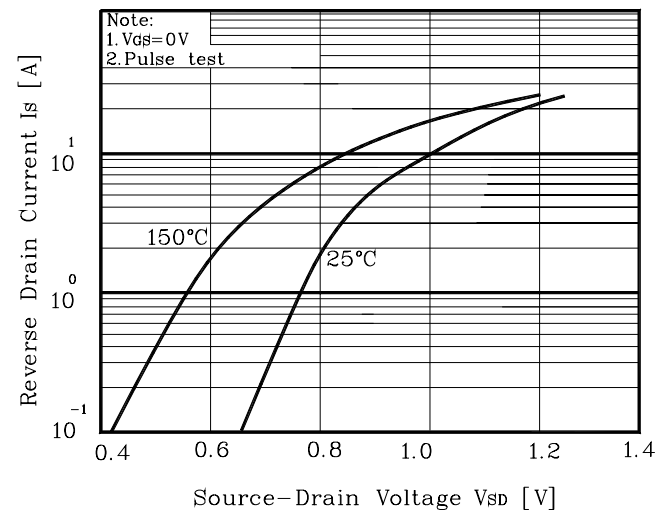


Fig. 5 Capacitance - V_{DS}

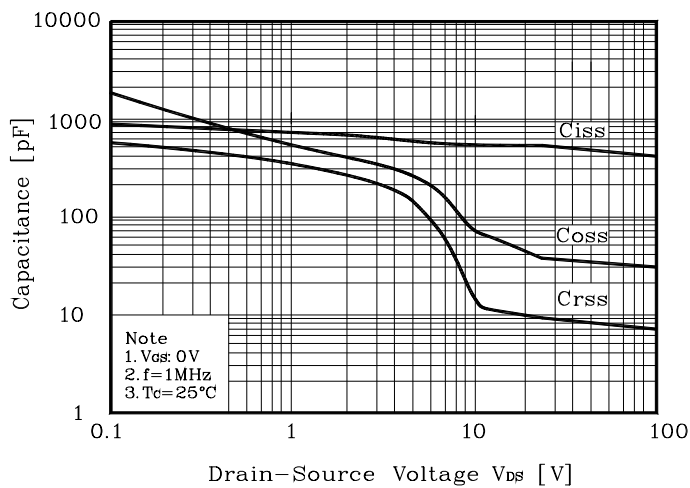


Fig. 6 $V_{GS} - Q_G$

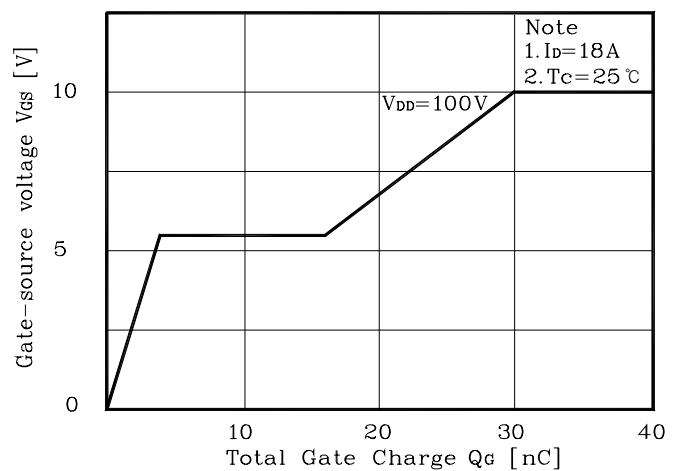


Fig. 7 $V_{DS} - T_J$

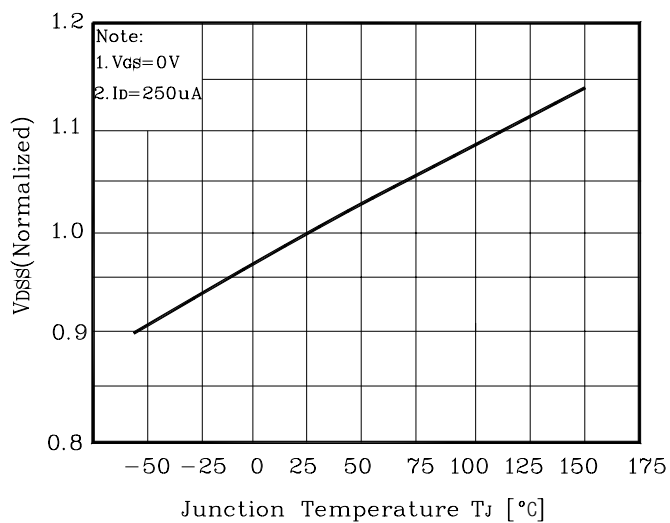


Fig. 8 $R_{DS(on)} - T_J$

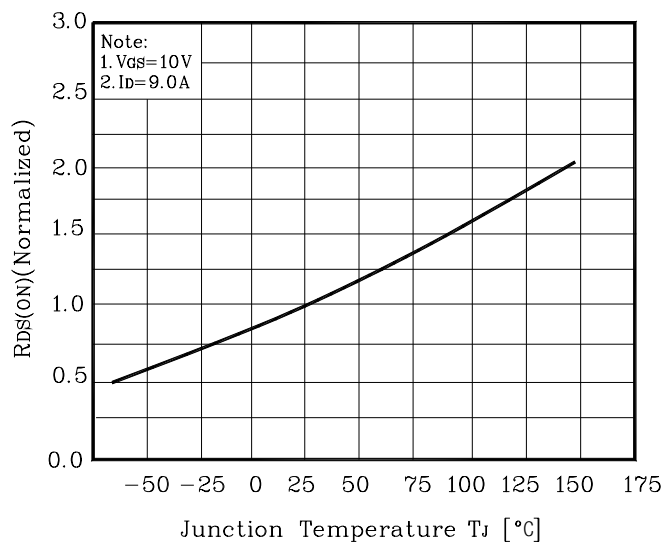


Fig. 9 $I_D - T_C$

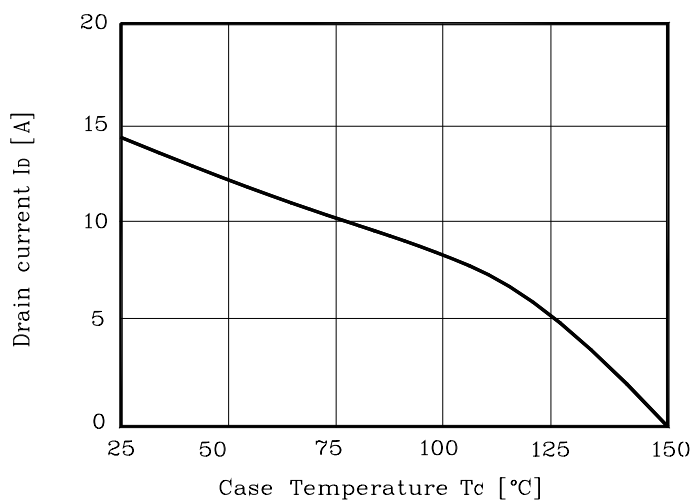


Fig. 10 Safe Operating Area

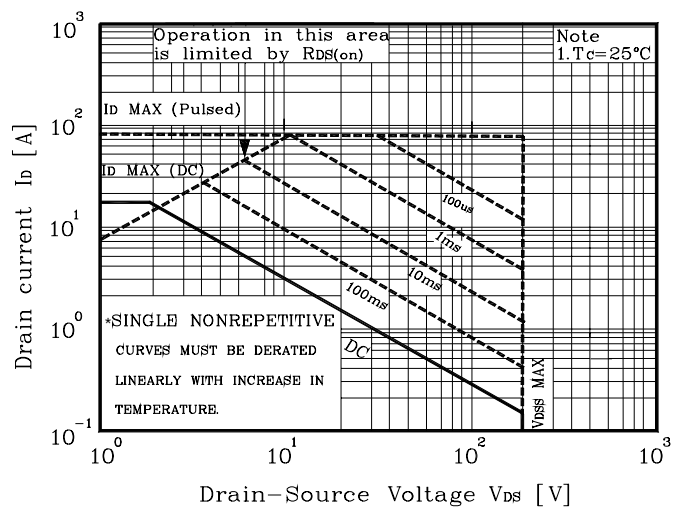


Fig. 11 Gate Charge Test Circuit & Waveform

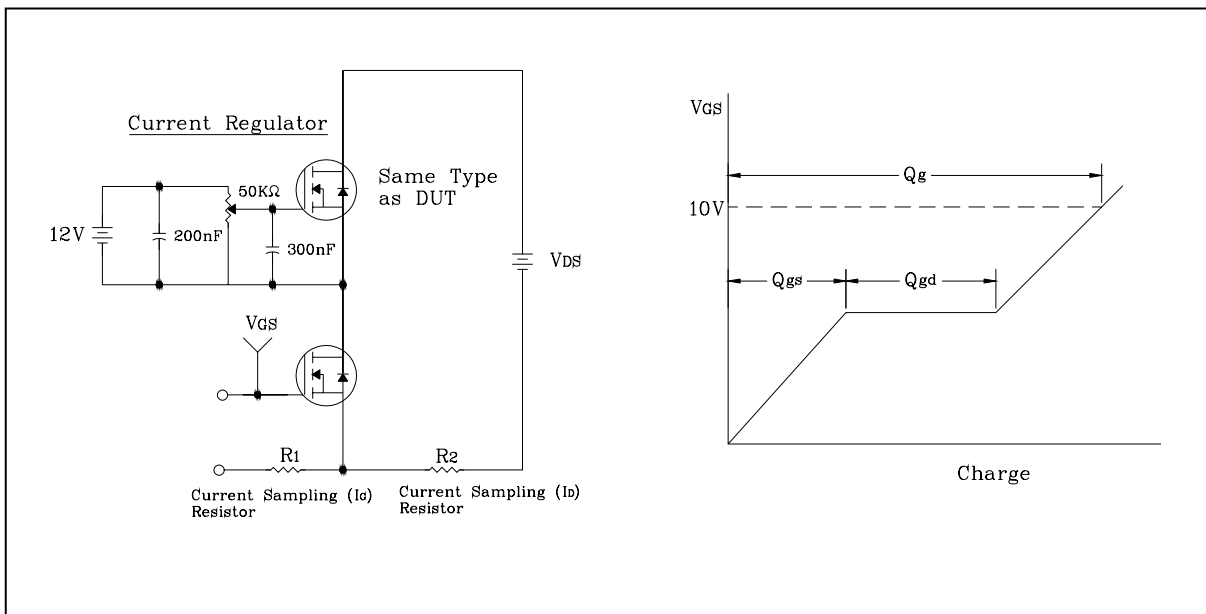


Fig. 12 Resistive Switching Test Circuit & Waveform

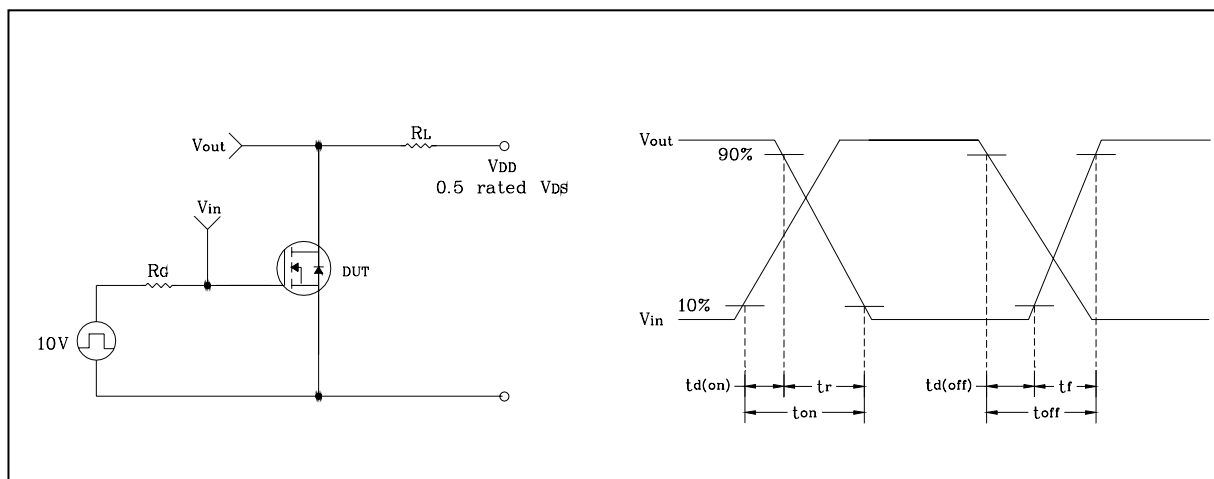


Fig. 13 E_{AS} Test Circuit & Waveform


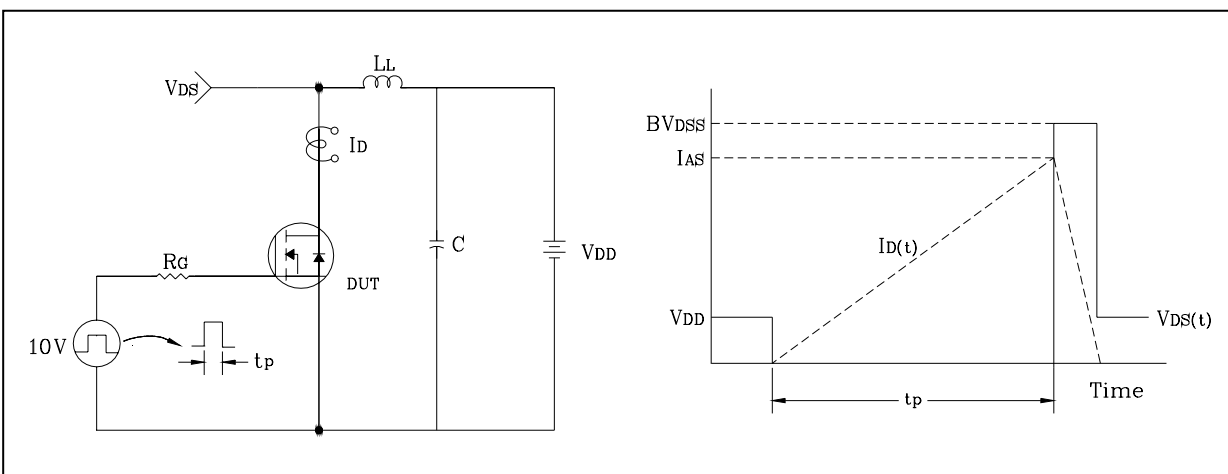


Fig. 14 Diode Reverse Recovery Time Test Circuit & Waveform

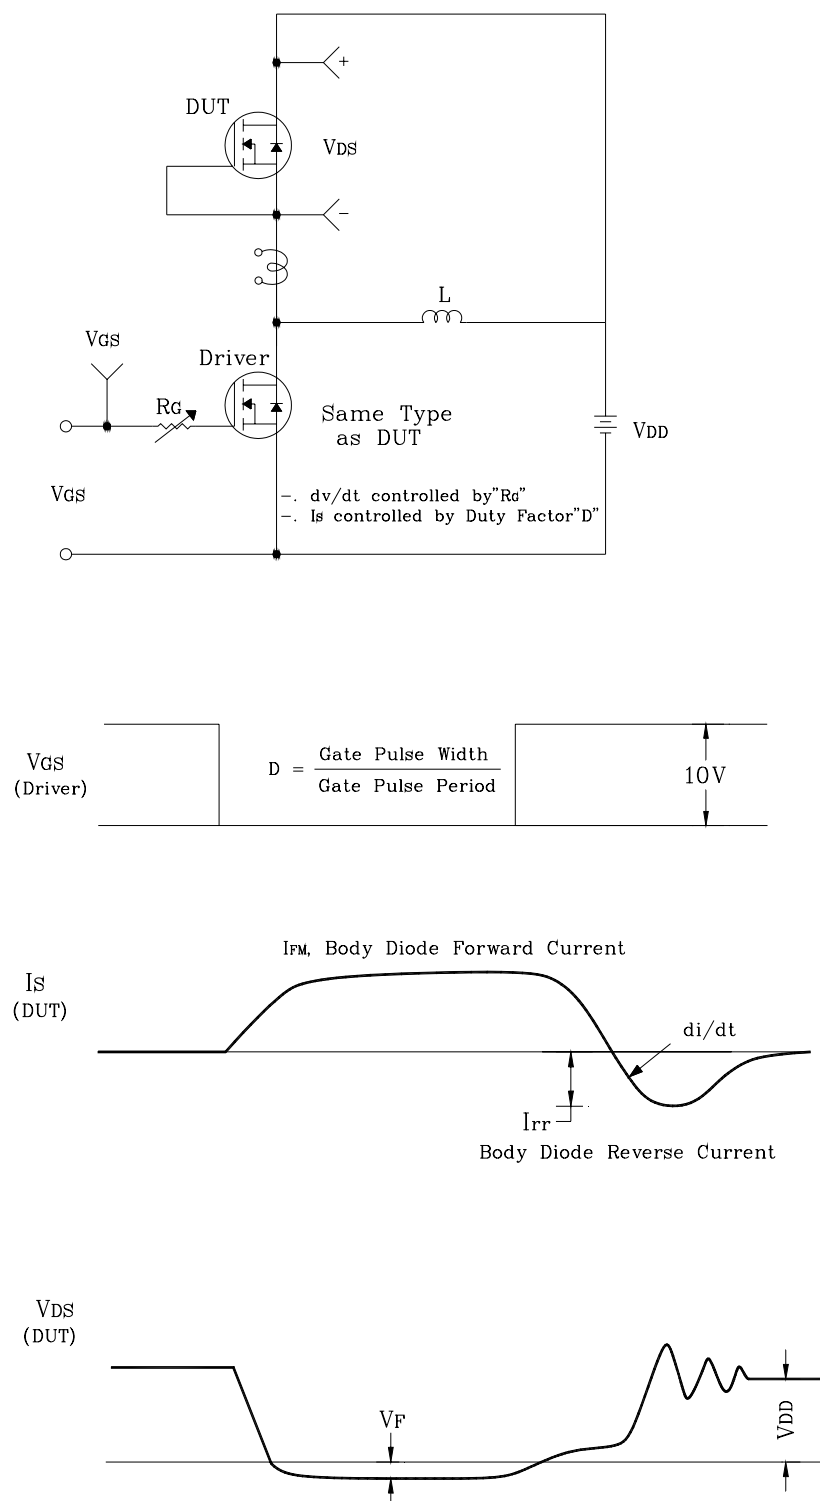

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.