

## Description

- General purpose application
- Switching application

## Features

- Excellent  $h_{FE}$  linearity :  $h_{FE}(I_C=0.1 \text{ mA}) / h_{FE}(I_C=2 \text{ mA}) = 0.95(\text{Typ.})$
- Complementary pair with STA9015SF


## Ordering Information

Type NO.	Marking	Package Code
STC9014SF	9C□	SOT-23F

□ :  $h_{FE}$  rank

## Outline Dimensions

unit : mm

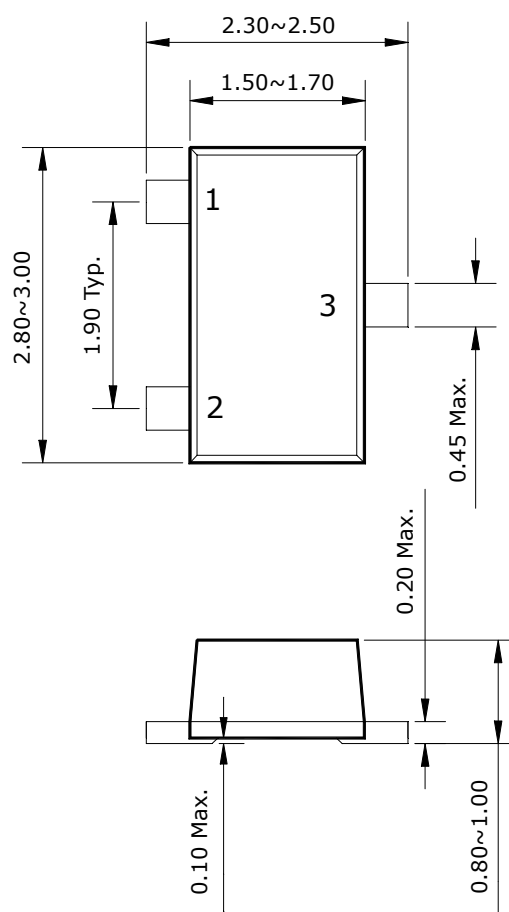

### PIN Connections

1. Base
2. Emitter
3. Collector

## Absolute Maximum Ratings

(Ta=25°C)

Characteristic	Symbol	Rating	Unit
Collector-base voltage	$V_{CBO}$	60	V
Collector-emitter voltage	$V_{CEO}$	50	V
Emitter-base voltage	$V_{EBO}$	5	V
Collector current	$I_C$	150	mA
Collector power dissipation	$P_C^*$	350	mW
Junction temperature	$T_J$	150	°C
Storage temperature range	$T_{stg}$	-55~150	°C

\* : Package mounted on 99.5% Alumina 10×8×0.6mm

## Electrical Characteristics


(Ta=25°C)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-emitter breakdown voltage	$BV_{CEO}$	$I_C=1mA, I_B=0$	50	-	-	V
Collector cut-off current	$I_{CBO}$	$V_{CB}=60V, I_E=0$	-	-	50	nA
Emitter cut-off current	$I_{EBO}$	$V_{EB}=5V, I_C=0$	-	-	100	nA
DC current gain	$h_{FE}^*$	$V_{CE}=5V, I_C=1mA$	100	-	1000	-
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=100mA, I_B=10mA$	-	0.1	0.25	V
Base-emitter voltage	$V_{BE}$	$V_{CE}=5V, I_C=1mA$	-	0.65	0.85	V
Transition frequency	$f_T$	$V_{CE}=10V, I_C=10mA$	-	200	-	MHz
Collector output capacitance	$C_{ob}$	$V_{CB}=10V, I_E=0, f=1MHz$	-	2	-	pF


\* :  $h_{FE}$  rank / B : 100 ~ 300, C : 200 ~ 600, D : 400 ~ 1000.

## Electrical Characteristic Curves


**Fig. 1  $P_C - T_a$**

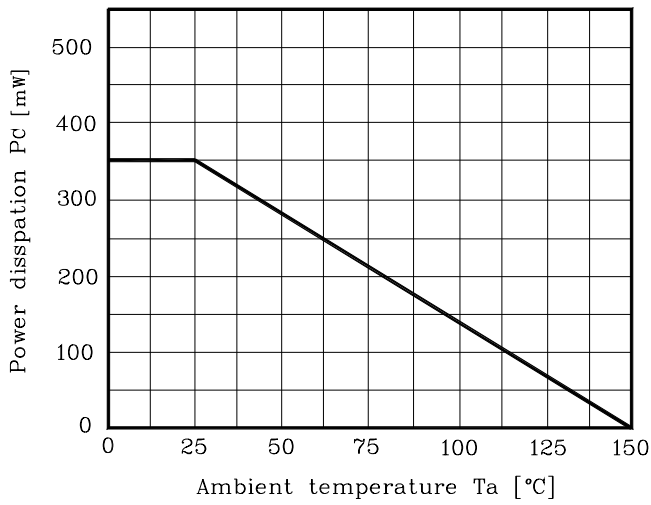


**Fig. 2  $I_C - V_{BE}$**

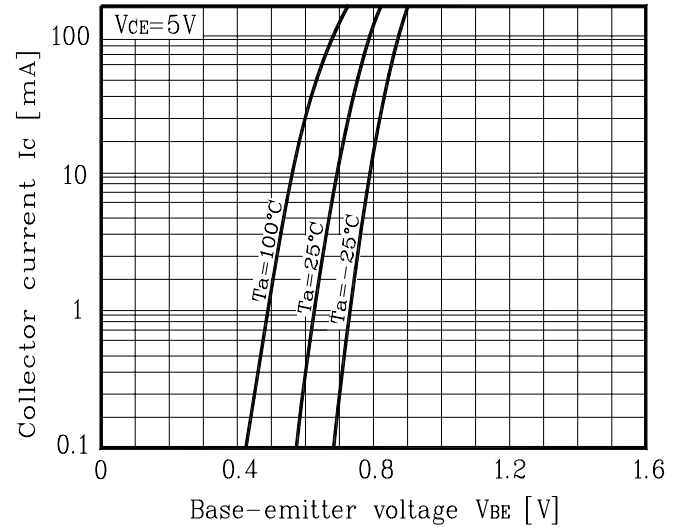


**Fig. 3  $I_C - V_{CE}$**

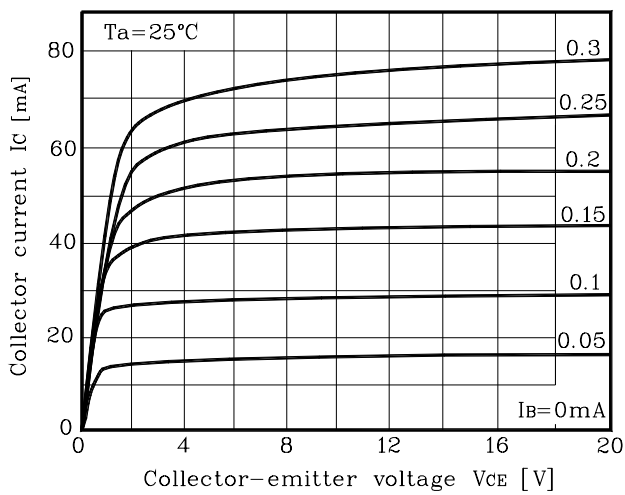


**Fig. 4  $V_{CE(sat)} - I_C$**

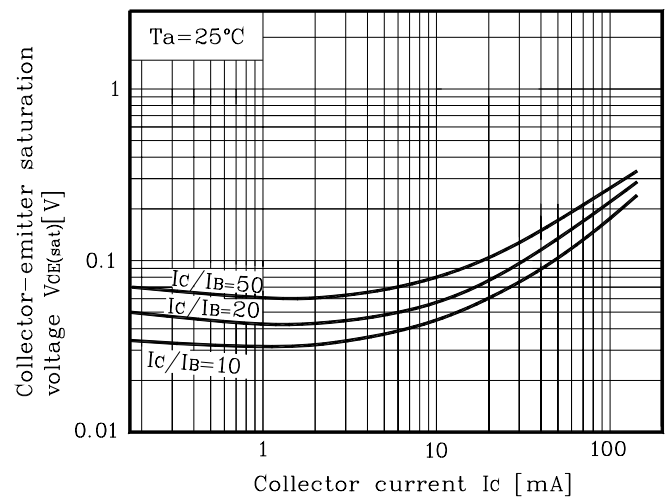

**Fig. 5  $h_{FE} - I_C$**

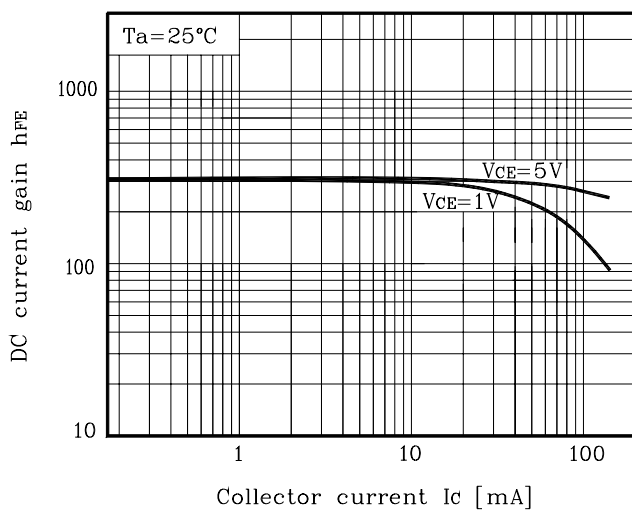

**Fig. 6  $h_{FE} - I_C$**

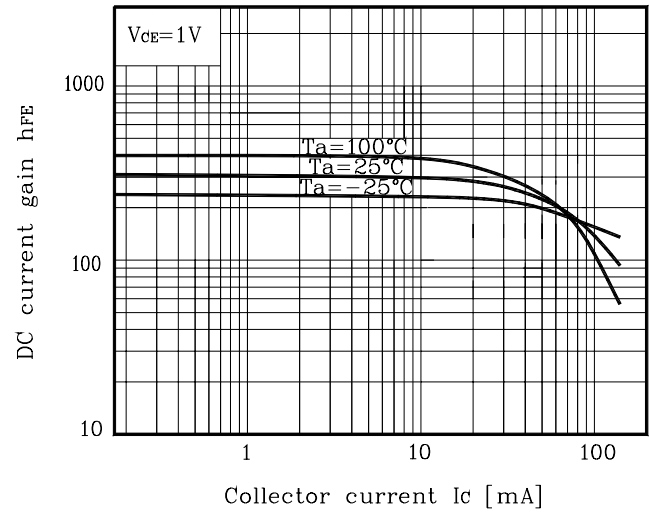

**The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).**

**Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..**

**Specifications mentioned in this publication are subject to change without notice.**