

TO-18 and T-1³/32 (5mm) LED Mounts and TO-18 Spreaders

Material Specifications:


White or Natural Nylon, per ASTM D4066 PA111, UL Rated 94V-2

Oxygen Rating Index: Over 28%

Standard Drawing Tolerances:

(unless otherwise indicated)

Fractions: $\pm 1/64$ (0.4) .XX = ± 0.01 (0.25)


$$.X = \pm 0.10 \text{ (2.5)} \quad .XXX = \pm 0.005 \text{ (0.13)}$$


107-180

A55485 / 01-043N


Price Code: A

M38527 / 01-043N

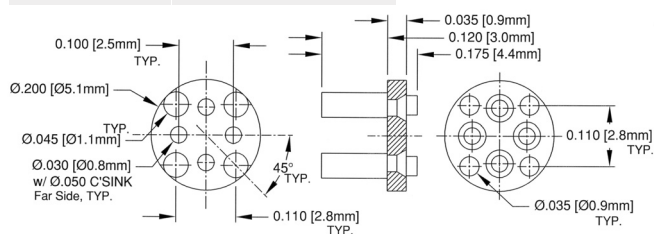

113-125

Price Code: A

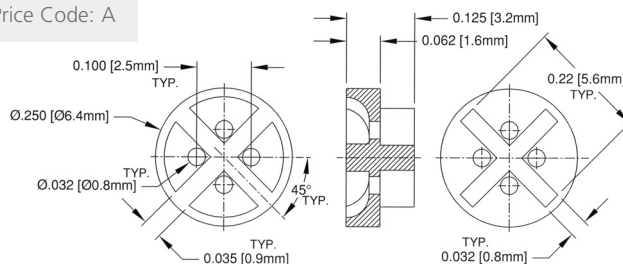


115-100

A55485 / 01-030N

Price Code: A

M38527 / 01-030N

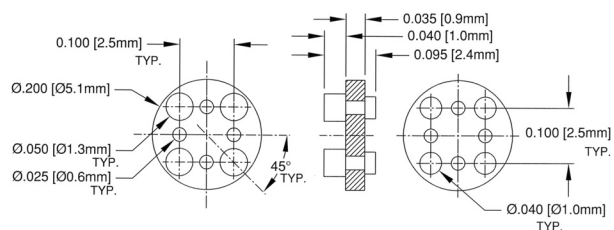


119-096

Price Code: A

A55485 / 01-033N

M38527 / 01-033N

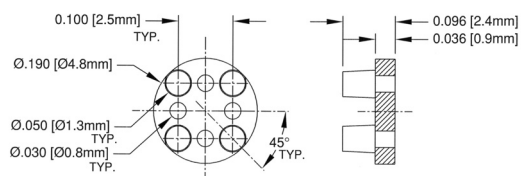


120-156

A55485 / 01-044N

Price Code: A

M38527 / 01-044N

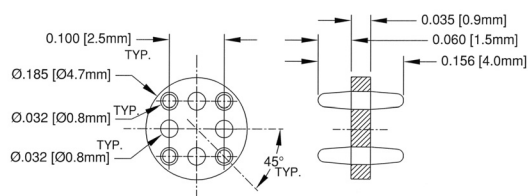

200-115

Price Code: A

A55485 / 03-013N

M38527 / 03-013N

