

LED MOUNTS/SPACERS

Molded Vertical LED Spacer


SRM Series

Bivar's new Self-retaining Mounts (SRM series) address many of the concerns raised by the RoHS Directive and emerging Pb Free soldering processes. This process compatible LED mount is molded from UL Rated 94V-0 Nylon® and is capable of withstanding the above board temperatures associated with lead free soldering processes. Retention is achieved by the use of ingenious bifurcated lead-retaining spring feet that firmly grasp the LED lead frame while balancing easy application and installation with firm retention and repeatable positioning.

Additional and custom sizes are available. Please consult the factory for minimum orders and additional terms and conditions.

SRM-04 Series

Part No.	H	T	F
SRM-04-120	.120 (3.0)	.100 (2.5)	.020 (0.51)
SRM-04-150	.150 (3.8)		.050 (1.3)
SRM-04-220	.220 (5.6)		.120 (3.0)
SRM-04-250	.250 (6.4)		.150 (3.8)

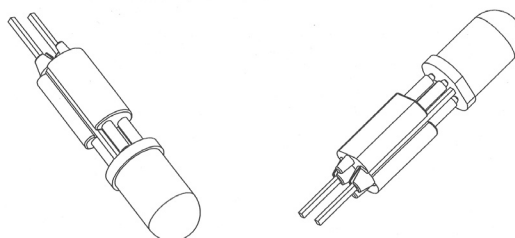

Note: Application Shown with 5mm LED

SRM-24 Series

Part No.	H	T	F
SRM-24-320	.320 (8.1)	.300 (7.6)	.020 (0.51)
SRM-24-350	.350 (8.9)		.050 (1.3)
SRM-24-420	.420 (10.7)		.120 (3.0)
SRM-24-450	.450 (11.4)		.150 (3.8)
SRM-24-520	.520 (13.2)		.220 (5.6)
SRM-24-550	.550 (14.0)		.250 (6.4)

