

WASH-AWAY SPACERS

Wash-Away Rectangular and Square Spacers for DIP, Radial and Axial Devices

- Ideal for all industry-standard DIP, axial and radial mounted devices
- Properly elevate and protect delicate leads during board handling and assembly
- Spacers wash away in hot or warm running water
- 96 different sizes and elevations



Most DISS-O-PADs® may be ordered in an effervescent version to reduce dissolving time. Add the letter "E" as a suffix, e.g. TO-117-070E. The extra cost is \$3.50/K regardless of quantity.

To Order:

Simply specify PART NUMBER and follow by THICKNESS desired. EXAMPLE: TO-117-070 is the basic TO-117 part, .070" (1.8) thick.


Note:

TO-XXX, 3 digit base part numbers are slightly higher in price than TO-XX, 2 digit base part numbers.

Tolerances: $\pm .005$ (.13)

Thickness Conversion Chart


No.	inch	mm	No.	inch	mm
-030	.030	(.76)	-100	.100	(2.5)
-040	.040	(1.0)	-110	.110	(2.8)
-050	.050	(1.3)	-120	.120	(3.0)
-060	.060	(1.5)	-130	.130	(3.3)
-070	.070	(1.8)	-140	.140	(3.6)
-080	.080	(2.0)	-150	.150	(3.8)
-090	.090	(2.3)			

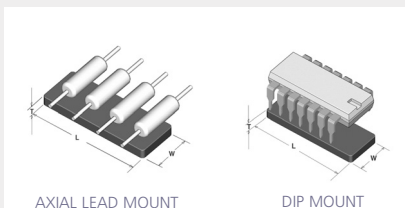

Unslotted Applications

Rectangular and Square Spacers

Part No.	L	W	Thickness	FIG.	
TO-100	.670 (17.0)	.100 (2.5)	040, 050, 060, 070, 090, 100, 120, 130, 150	E	Rectangular
TO-101	.562 (14.3)	.185 (4.7)	040, 050, 060, 070, 090, 100, 120, 130, 150	E	Rectangular
TO-102	.505 (12.8)	.160 (4.1)	040, 050, 060, 070, 090, 100, 120, 130, 150	E	Rectangular
TO-116	.666 (16.9)	.300 (7.6)	040, 050, 060, 070, 090, 100, 120, 130, 150	E	Rectangular
TO-117	.666 (16.9)	.281 (7.1)	040, 050, 060, 070, 090, 100, 120, 130, 150	E	Rectangular
TO-118	.705 (17.9)	.260 (6.6)	040, 050, 060, 070, 090, 100, 120, 130, 150	E	Rectangular
TO-120	.085 (2.2)	.085 (2.2)	040, 050, 060, 070, 090, 100, 120	F	Square
TO-121	.095 (2.4)	.095 (2.4)	040, 050, 060, 070, 090, 100, 120	F	Square

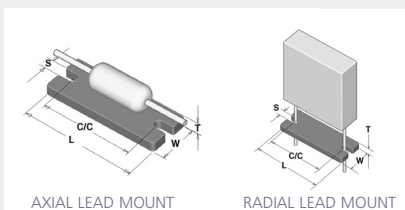

Slotted Applications

Radial and Axial Device Spacers

Part No.	C/C	S	W	L	Thickness
TO-200	.100 (2.5)	.035 (.89)	.095 (2.4)	.190 (4.8)	040, 050, 060, 070, 090, 100, 120, 130, 150
TO-201	.150 (3.8)	.035 (.89)	.095 (2.4)	.240 (6.1)	040, 050, 060, 070, 090, 100, 120, 130, 150
TO-203	.200 (5.1)	.035 (.89)	.095 (2.4)	.290 (7.4)	040, 050, 060, 070, 090, 100, 120, 130, 150
TO-204	.250 (6.4)	.040 (1.0)	.145 (3.7)	.340 (8.6)	040, 050, 060, 070, 090, 100, 120, 130, 150
TO-205	.300 (7.6)	.040 (1.0)	.145 (3.7)	.390 (9.9)	040, 050, 060, 070, 090, 100, 120, 130, 150
TO-206	.400 (10.2)	.045 (1.1)	.195 (5.0)	.490 (12.4)	040, 050, 060, 070, 090, 100, 120, 130, 150
TO-207	.500 (12.7)	.045 (1.1)	.195 (5.0)	.590 (15.0)	040, 050, 060, 070, 090, 100, 120, 130, 150