

Features

- DC to 4 GHz
- Flanged model
- Low VSWR

Applications

- High power RF transmission

CHF5225CNF Series 60 W Power RF Flanged Chip Termination


General Specifications

Substrate.....ALN
 Resistive Film.....Thick Film
 TabAg
 Protection.....Epoxy
 Tab Attachment
Braze with Epoxy Encapsulation
 Mounting FlangeCu plated with Ni
 Resistance.....50 Ω
 Tolerance..... $\pm 5\%$
 Packaging100 pcs./tray

Absolute Ratings


Power.....60 W
 Frequency4.0 GHz
 VSWR.....1.2 Maximum

Characteristic Curve

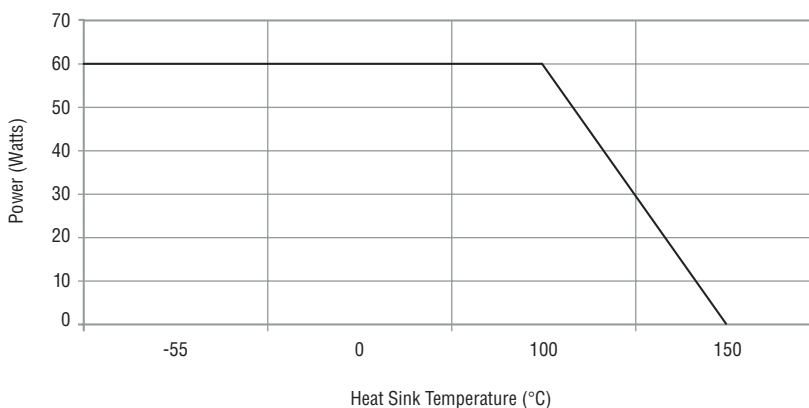


Product Dimensions

Version C

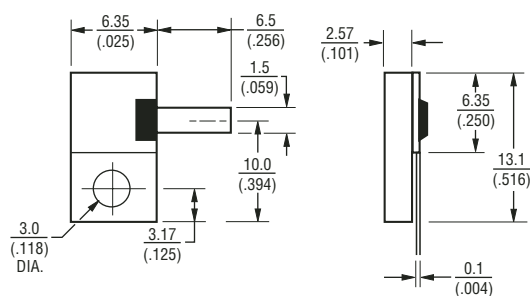

Version D



DIMENSIONS = $\frac{\text{MILLIMETERS}}{(\text{INCHES})}$

How To Order

CHF 5225 C N F 500 L

Model _____
 Size _____
 Version _____
 Substrate _____
 Mount _____
 F = Flange
 Value _____
 500 = 50 Ohm
 Function _____
 L = Termination



Reliable Electronic Solutions

Asia-Pacific:

Tel: +886-2 2562-4117

Fax: +886-2 2562-4116

Europe:

Tel: +41-41 768 5555

Fax: +41-41 768 5510

The Americas:

Tel: +1-951 781-5500

Fax: +1-951 781-5700

www.bourns.com