



Features

- DC to 3.0 GHz
- Flanged model
- Low VSWR
- Beryllium Oxide ceramic

Applications

- High power RF transmission

CHF9838CBF Series 250 W Power RF Flanged Chip Termination


General Specifications

Substrate	Beo
Resistive Film	Thick Film
Tab	Ag
Cover Substrate	AL203
Mounting Flange	Cu plated with Ni
Resistance	50 Ω
Tolerance	$\pm 5\%$
Packaging	60 pcs./tray


Absolute Ratings

Power	250 W
Frequency	3.0 GHz
VSWR	1.25 Maximum

Characteristic Curve

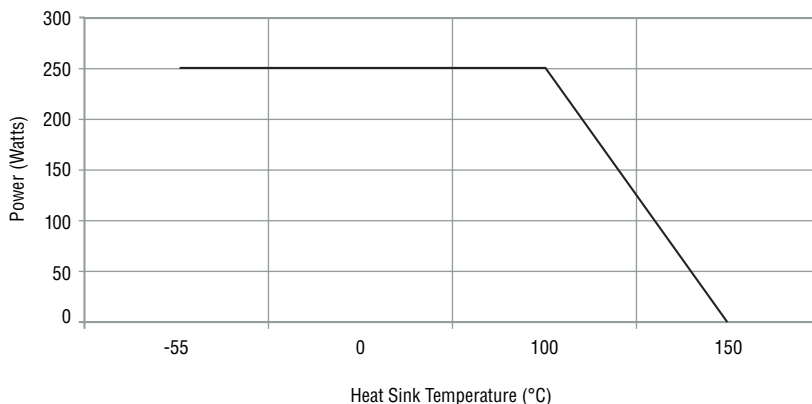

Product Dimensions

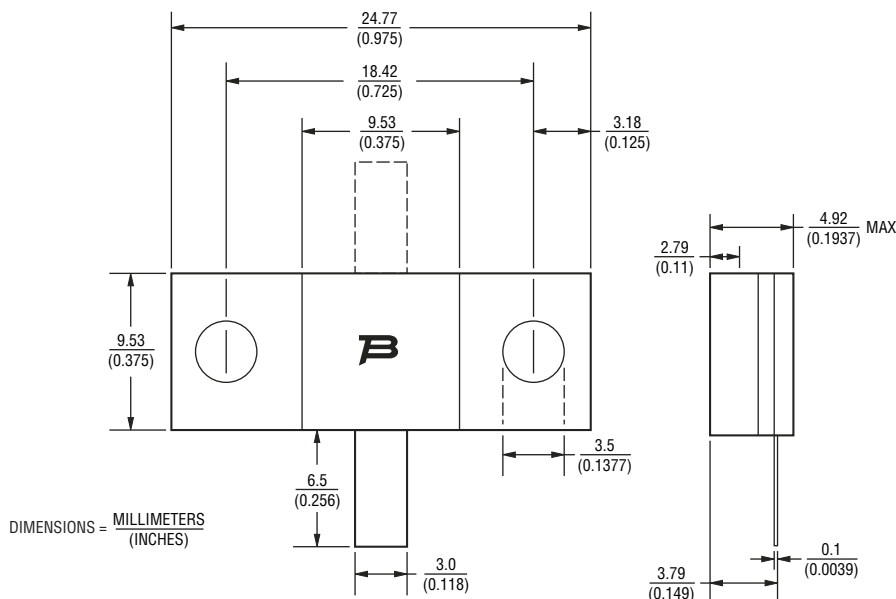

Reliable Electronic Solutions

Asia-Pacific:

Tel: +886-2 2562-4117
Fax: +886-2 2562-4116

Europe:

Tel: +41-41 768 5555
Fax: +41-41 768 5510

The Americas:

Tel: +1-951 781-5500
Fax: +1-951 781-5700

www.bourns.com

How To Order

CHF 9838 C B F 500 L

Model _____

Size _____

Version _____

Substrate _____

Mount _____

F = Flange

Value _____

500 = 50 Ohm

Function _____

L = Termination