

# 75 Watt HE Single Series DC/DC Converters



## Description

The 75 watt single HE series DC/DC converters provide precisely regulated dc outputs. All outputs are fully isolated from the inputs, allowing the output to be used with positive or negative polarity and various grounding options. The HE series meets the most rigorous requirements in an industry standard case size for industrial process control and telecom applications.

Standard features include remote sensing, output trim, and remote on/off. Threaded-through holes are provided to allow easy mounting or to add a heat sink for extended temperature use.

Selection Chart				
Model	V in nom VDC	I in ADC	V out VDC	I out ADC
24S3.15HE	24	2.52	3.3	15
24S5.15HE	24	3.63	5	15
24S12.6HE	24	3.59	12	6.25
24S15.5HE	24	3.55	15	5
24S24.3HE	24	3.55	24	3.13
48S3.15HE	48	1.24	3.3	15
48S5.15HE	48	1.80	5	15
48S12.6HE	48	1.78	12	6.25
48S15.5HE	48	1.76	15	5
48S24.3HE	48	1.76	24	3.13

### NOTES:

Efficiencies up to 88%.

Default ON/OFF logic is positive.

Add -N to the model number to order negative ON/OFF logic.

## Features

- Small Size 2.4" x 2.28" x 0.55"
- Industry Standard Pinout
- Excellent Thermal Performance with Metal Baseplate
- High Efficiency
- Volt-seconds Clamp and Fast Over Voltage Clamp
- Pulse-by-pulse Current Limiting, Short Circuit Frequency Foldback, Dead Short Shutdown
- Over-temperature Protection
- Auto-softstart
- Low Noise
- Planar Magnetics
- Constant Frequency for Normal Operation
- More than 2:1 Input Voltage Range
- Remote Sense
- Remote ON/OFF
- Super Energy Saving, 2 mA Input Idle Current
- Output Trim with Very Low Temperature Coefficient
- Water Washable, Wide Humidity Applications
- Shock & Vibration Damping
- Low Cost
- Undervoltage Lockout
- Input Reverse Voltage Protection
- 5 Year Warranty


# 75 Watt HE Single Series DC/DC Converters

Unless otherwise stated, these specifications apply for ambient temperature  $T_A=23 \pm 2^\circ\text{C}$ , nominal input voltage, and rated full load. (1)

Input Parameters							
Model		24S3.15HE	24S5.15HE	24S12.6HE	24S15.5HE	24S24.3HE	Units
Voltage Range	MIN TYP MAX	18 24 36					VDC
Input Ripple Rejection (120Hz)	TYP	60					dB
Undervoltage Lockout		Yes					
Input Reverse Voltage Protection		Yes					
Input Current No Load 100% Load	TYP TYP	12 2.52	12 3.63	12 3.59	12 3.55	12 3.55	mA A
Inrush Current	MAX	0.5					A <sup>2</sup> S
Reflected Ripple, 12µH Source Impedance (2)	TYP	20					mA P-P
Efficiency	TYP	82	86	87	88	88	%
Switching Frequency	TYP	440					kHz
Maximum Input Overvoltage* 100 ms Maximum	MAX	50					VDC
Recommended Fuse		(3)					AMPS
Model		48S3.15HE	48S5.15HE	48S12.6HE	48S15.5HE	48S24.3HE	Units
Voltage Range	MIN TYP MAX	36 48 75					VDC
Input Ripple Rejection (120Hz)	TYP	60					dB
Undervoltage Lockout		Yes					
Input Reverse Voltage Protection		Yes					
Input Current No Load 100% Load	TYP TYP	12 1.24	12 1.80	12 1.78	12 1.76	12 1.76	mA A
Inrush Current	MAX	0.5					A <sup>2</sup> S
Reflected Ripple, 12µH Source Impedance (2)	TYP	20					mA P-P
Efficiency	TYP	83	87	88	89	89	%
Switching Frequency	TYP	440					kHz
Maximum Input Overvoltage* 100 ms Maximum	MAX	85					VDC
Recommended Fuse		(3)					AMPS

# 75 Watt HE Single Series DC/DC Converters

Output Parameters							
Model		24S3.15HE 48S3.15HE	24S5.15HE 48S5.15HE	24S12.6HE 48S12.6HE	24S15.5HE 48S15.5HE	24S24.3HE 48S24.3HE	Units
Output Voltage		3.3	5	12	15	24	VDC
Output Voltage Setpoint Accuracy	MAX	±1					%
Turn On Overshoot	TYP	0					%
Temperature Coefficient	TYP MAX	0.005 0.01	0.003 0.005				%/°C
Noise (8)	MAX	75	75	150	150	250	mV P-P
RMS Noise	TYP	20	20	60	60	100	mV RMS
Load Current (4)	MIN MAX	5 100					% I out rated
Load Transient Overshoot (7)	TYP	2.5					%
Load Transient Recovery Time (6)	TYP	100					µSec
Load Regulation (5) Min-Max Load	TYP MAX	0.02 0.2					%
Line Regulation Vin = Min-Max	TYP MAX	0.01 0.1					%
Overvoltage Protection (OVP) Threshold	TYP MAX	120 135					%
OVP Type - Non-latching Open Loop Overvoltage Clamp							
Output Current Limit V out=90% of V out-nom	TYP	120					%
Output Short Circuit Protection V out = 0.25 V	TYP MAX	140 150					%

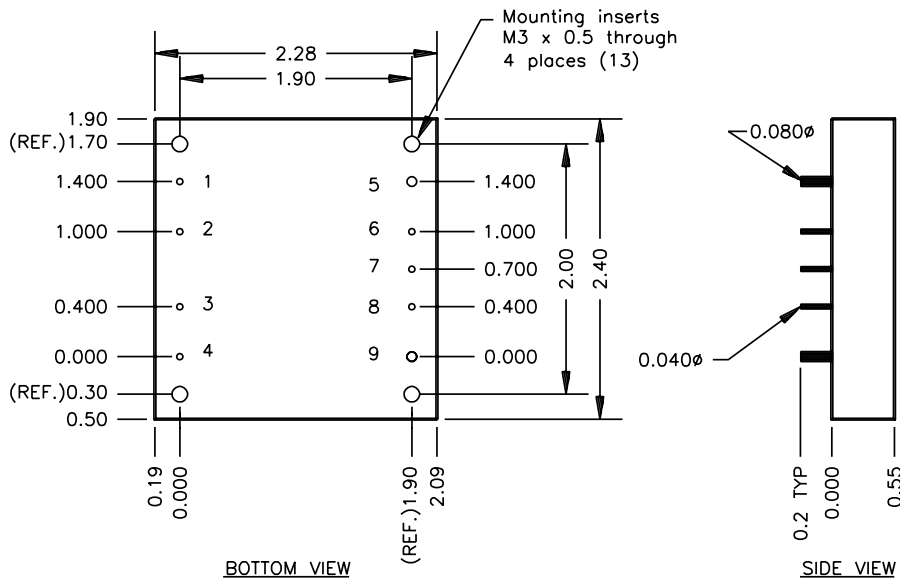

Pin	Function
1	-INPUT
2	CASE
3	ON/OFF
4	+INPUT
5	-OUTPUT
6	-SENSE
7	TRIM
8	+SENSE
9	+OUTPUT

Mechanical tolerances unless otherwise noted:

X.XX dimensions: ±0.020 inches

X.XXX dimensions: ±0.005 inches

# 75 Watt HE Single Series DC/DC Converters

General Specifications			
All Models			Units
Remote ON/OFF Function			
HIGH Logic Level or Leave Pin Open	MIN	3.0	VDC
External Leakage Current for Logic High	MAX	10	μA
Input Diode Protection Voltage	MAX	50	VDC
LOW Logic Level or Tie ON/OFF Pin to -Input	MAX	1.0	VDC
Sinking Current for Logic Low	MAX	500	μA
Open Circuit Voltage (10) Positive Logic	TYP	2.3	VDC
Negative Logic	TYP	1.5	VDC
Output Resistance	TYP	3	k Ohm
Idle Current (Module is OFF)	TYP	2	mADC
Turn-on Time to 1% error	TYP	20	mSec
Positive Logic	HIGH - Module ON LOW - Module OFF		
Negative Logic	HIGH - Module OFF LOW - Module ON		
Output Voltage Remote Sensing			
Maximum Voltage Drops on Leads	MAX	0.5	VDC
Line Regulation Under Remote Sensing	TYP	0.02	%
	MAX	0.1	
Load Regulation Under Remote Sensing	TYP	0.05	%
	MAX	0.2	
Output Voltage Trim			
Trim Range	MIN MAX	-10 +10	% of Vout
Input Resistance	TYP	10	kohm
Open Circuit Voltage	TYP	2.5	V
Sense and Trim Limit			
Maximum Output Voltage	TYP	110	% of Vout
Isolation			
Input to Output Isolation* 10μA Leakage			
V nom =12 V, 24 V	MAX	700	VDC
V nom = 48 V	MAX	1500	VDC
Input to Output Resistance	TYP	10	M ohm
Input to Output Capacitance	TYP	1800	pF
Environmental			
Calculated MTBF, Bellcore Method 1, Case 1		10 <sup>6</sup>	Hr
Baseplate Operating Temperature Range	MIN MAX	-40 100	°C
Storage Temperature	MIN MAX	-40 120	°C
Thermal Impedance	TYP	7	°C/W
Thermal Shutdown Baseplate Temperature (Auto Restart)	MIN TYP	100 110	°C
General			
Unit Weight	TYP	4/114	oz/g
Case Dimension	2.4" x 2.28" x 0.55"		
Approvals (pending)	UL1950, CUL, EN60950 (TUV)		
Chassis Mounting Kit	MS21		
Torque on Mounting Inserts	MAX	12 in. oz.	

\* Absolute Maximum Ratings. Caution: Stresses in excess of the Absolute Maximum Ratings can cause permanent damage to the device (see Note 1).

## NOTES:

- Refer to the CALEX Application Notes for the definition of terms, measurement circuits, and other information.
- 33 μF capacitor connected to two "Input" pins. Then place current sensor in series with 12 μH inductor between 33 μF and source. The reflected ripple current is measured over 5 Hz to 20 MHz bandwidth.
- Refer to the CALEX Application Notes for information on fusing.
- Optimum performance is obtained when this power supply is operated within the minimum to maximum load specifications. No damage to module will occur, when the output is operated at less than minimum load, but the output voltage may contain a low frequency component that may exceed output noise specifications.
- Load regulation is defined as the output voltage change when changing load current from maximum to minimum.
- Load Transient Recovery Time is defined as the time for the output to settle from a 50 to 75% step load change to a 1% error band (rise time of step = 2μSec).
- Load Transient Overshoot is defined as the peak overshoot during a transient as defined in the Note 6 above.
- Noise is measured per the CALEX Application Notes. Output noise is measured with a 10μF tantalum capacitor in parallel with a 0.1 μF ceramic capacitor connected across the output to CMN. Measurement bandwidth is 0-20 MHz.
- When an external On/Off switch is used, such as open collector switch, logic high requires the switch to be high-impedance. Switch leakage currents greater than 10 uA may be sufficient to trigger the ON/Off to the logic-low state.
- Most switches would be suitable for logic On/Off control, in case there is a problem, you can make following estimations and then leave some margins.  
When open collector is used for logic high, "Open Circuit Voltage at On/Off Pin", "Output Resistance" and "External Leakage Current Allowed for Logic High" are used to estimate the high impedance requirement of open collector.  
When switch is used for logic low, "Open Circuit Voltage at On/Off Pin", "Output Resistance" and "LOW Logic Level" are used to estimate the low impedance requirement of switch.
- Specifications subject to change without notice.
- Water Washability - Calex DC/DC converters are designed to withstand most solder/wash processes. Careful attention should be used when assessing the applicability in your specific manufacturing process. Converters are not hermetically sealed.
- Torque fasteners into threaded mounting inserts at 12 in. oz. or less. Greater torque may result in damage to unit and void the warranty.