

ESD Protection Arrays, Chip Scale Package

Features

- Functionally and pin compatible with CAMD's PACDN1404C, PACDN1408C and PACDN1416C family of ESD protection devices
- 4, 8, or 16 transient voltage suppressors in a single package
- Optiguard™ coated for improved reliability at assembly
- In-system Electrostatic Discharge (ESD) protection to $\pm 25\text{kV}$ contact discharge per IEC 61000-4-2 international standard
- Compact Chip Scale Package (0.65mm pitch) format saves board space and eases layout in space critical applications compared to discrete solutions and traditional wire bonded packages
- Lead-free versions available

Applications

- ESD protection for sensitive electronic equipment
- I/O port, keypad and button circuitry protection for portable devices
- Wireless Handsets
- Handheld PCs / PDAs
- MP3 Players
- Digital Cameras and Camcorders
- Notebooks
- Desktop PCs

Product Description


The CM1205 family of transient voltage suppressor arrays provides a very high level of protection for sensitive electronic components that may be subjected to ESD.


These devices are designed and characterized to safely dissipate ESD strikes at levels well beyond the maximum requirements set forth in the IEC 61000-4-2 international standard (Level 4, $\pm 8\text{kV}$ contact discharge). All I/Os are rated at $\pm 25\text{kV}$ using the IEC 61000-4-2 contact discharge method. Using the MIL-STD-883D (Method 3015) specification for Human Body Model (HBM) ESD, all pins are protected for contact discharges to greater than $\pm 30\text{kV}$.

The Chip Scale Package format of these devices enable extremely small footprints that are necessary in portable electronics such as cellular phones, PDAs, internet appliances and PCs. The large solder bumps allow for standard attachment to laminate boards without the use of underfill.

The CM1205 features OptiGuard™ coating for improved reliability at assembly and is available with optional lead-free finishing.



Electrical Schematic

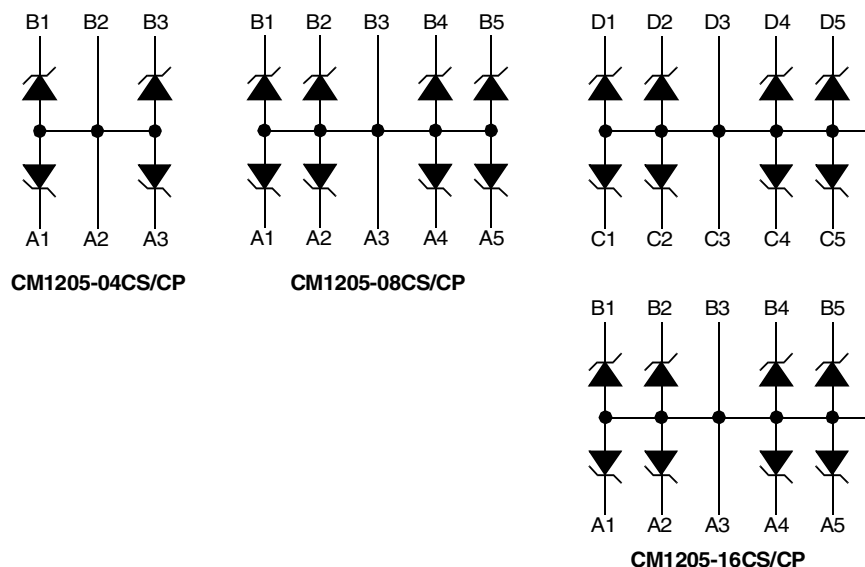

PACKAGE / PINOUT DIAGRAMS


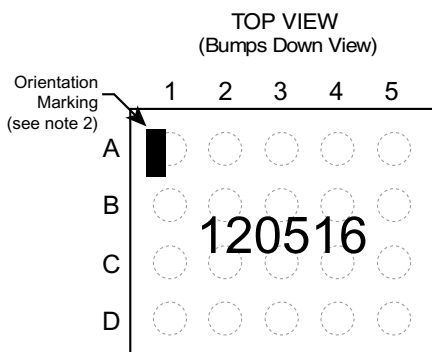

CM1405-04
CSP Package

BOTTOM VIEW
(Bumps Up View)

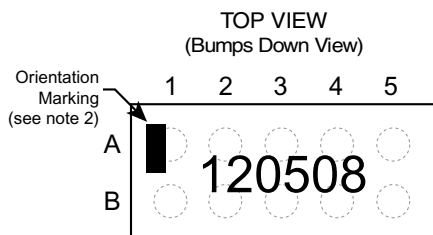


CM1405-08
CSP Package

BOTTOM VIEW
(Bumps Up View)



CM1405-16
CSP Package

BOTTOM VIEW
(Bumps Up View)



Notes:

- 1) These drawings are not to scale.
- 2) Lead-free devices are specified by using a "+" character for the top side orientation mark.

Ordering Information

PART NUMBERING INFORMATION

Bumps	Package	Standard Finish		Lead-free Finish ²	
		Ordering Part Number ¹	Part Marking	Ordering Part Number ¹	Part Marking
6	CSP	CM1205-04CS	L05	CM1205-04CP	L05
10	CSP	CM1205-08CS	120508	CM1205-08CP	120508
20	CSP	CM1205-16CS	120516	CM1205-16CP	120516

Note 1: Parts are shipped in Tape & Reel form unless otherwise specified.

Note 2: Lead-free devices are specified by using a "+" character for the top side orientation mark.



Specifications

ABSOLUTE MAXIMUM RATINGS

PARAMETER	RATING	UNITS
Storage Temperature Range	-65 to +150	°C

STANDARD OPERATING CONDITIONS

PARAMETER	RATING	UNITS
Operating Temperature Range	-40 to +85	°C

ELECTRICAL OPERATING CHARACTERISTICS¹

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V _{REV}	Reverse Standoff Voltage	I _{DIODE} =10μA	5.5			V
I _{LEAK}	Leakage Current	V _{IN} =3.3V DC			100	nA
V _{SIG}	Signal Clamp Voltage Positive Clamp Negative Clamp	I _{LOAD} = 10mA	5.6 -1.2	6.8 -0.8	8.0 -0.4	V V
V _{ESD}	In-system ESD Withstand Voltage a) Human Body Model, MIL-STD-883, Method 3015 b) Contact Discharge per IEC 61000-4-2 Level 4	Notes 2 & 3	±30 ±25			kV kV
V _{CL}	Clamping Voltage during ESD Discharge MIL-STD-883 (Method 3015), 8kV Positive Transients Negative Transients	Notes 2 & 3		+12 -8		V V
C	Channel Capacitance	At 2.5V DC, f = 1MHz		39	47	pF

Note 1: T_A=25°C unless otherwise specified. GND in this document refers to the lower supply voltage.

Note 2: ESD applied to channel pins with respect to GND, one at a time. All other channels are open. All GND pins tied to ground.

Note 3: These parameters are guaranteed by design and characterization.

Application Information

Refer to Application Note AP-217, "The Chip Scale Package", for a detailed description of Chip Scale Packages offered by California Micro Devices.

PRINTED CIRCUIT BOARD RECOMMENDATIONS

PARAMETER	VALUE
Pad Size on PCB	0.300mm
Pad Shape	Round
Pad Definition	Non-Solder Mask defined pads
Solder Mask Opening	0.350mm Round
Solder Stencil Thickness	0.125 - 0.150mm
Solder Stencil Aperture Opening (laser cut, 5% tapered walls)	0.360mm Round
Solder Flux Ratio	50/50 by volume
Solder Paste Type	No Clean
Pad Protective Finish	OSP (Entek Cu Plus 106A)
Tolerance — Edge To Corner Ball	$\pm 50\mu\text{m}$
Solder Ball Side Coplanarity	$\pm 20\mu\text{m}$
Maximum Dwell Time Above Liquidous	60 seconds
Soldering Maximum Temperature	260°C

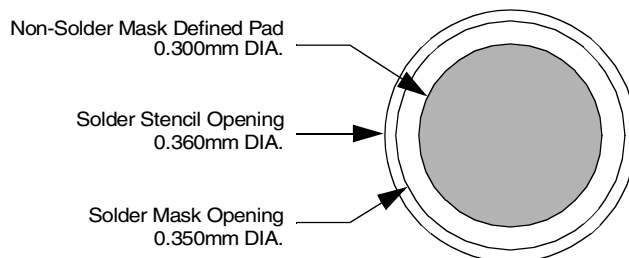


Figure 1. Recommended Non-Solder Mask Defined Pad Illustration

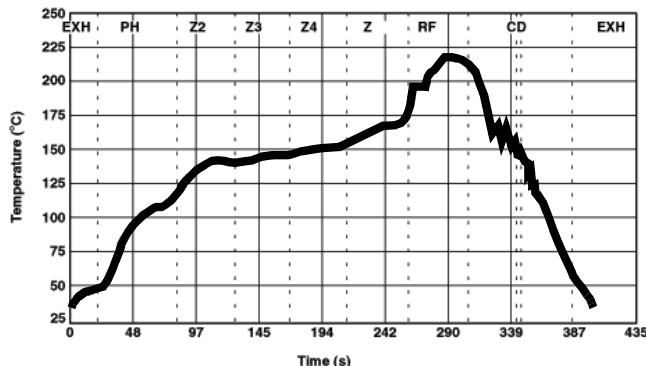


Figure 2. Eutectic (SnPb) Solder Ball Reflow Profile

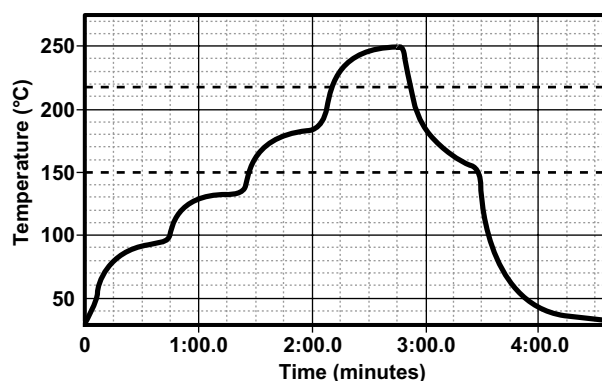


Figure 3. Lead-free (SnAgCu) Solder Ball Reflow Profile




Mechanical Details

The CM1205 devices are packaged in custom Chip Scale Packages (CSP).

CM1205-04CS/CP 6-bump CSP Mechanical Specifications

The CM1205-04CS/CP devices are packaged in a 6-bump custom Chip Scale Package (CSP). Dimensions are presented below.

PACKAGE DIMENSIONS						
Package		Custom CSP				
Bumps		6				
Dim	Millimeters			Inches		
	Min	Nom	Max	Min	Nom	Max
A1	1.109	1.154	1.199	0.0437	0.0454	0.0472
A2	1.759	1.804	1.849	0.0693	0.0710	0.0728
B1	0.645	0.650	0.655	0.0254	0.0256	0.0258
B2	0.645	0.650	0.655	0.0254	0.0256	0.0258
B3	0.645	0.650	0.655	0.0254	0.0256	0.0258
C1	0.202	0.252	0.302	0.0080	0.0099	0.0119
C2	0.202	0.252	0.302	0.0080	0.0099	0.0119
D1	0.638	0.707	0.776	0.0251	0.0278	0.0306
D2	0.394	0.445	0.495	0.0155	0.0175	0.0195
# per tape and reel		3500 pieces				
Controlling dimension: millimeters						

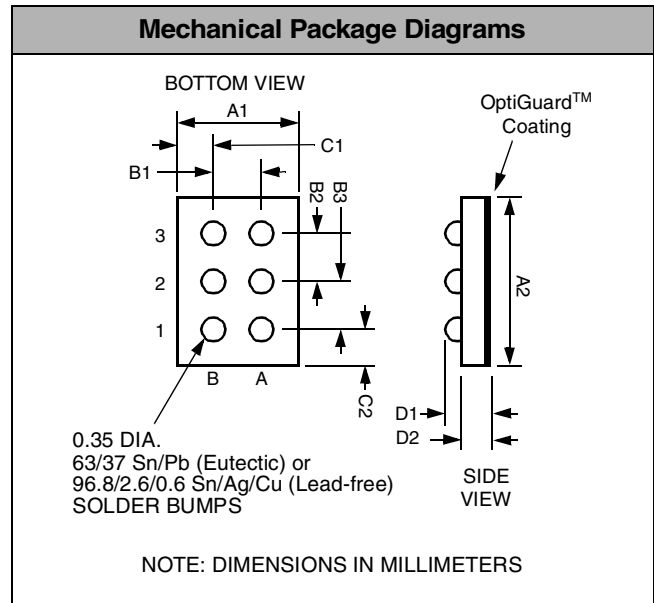

**Package Dimensions for CM1205-04CS/CP
6-bump Chip Scale Package**

CSP Tape and Reel Specifications

PART NUMBER	CHIP SIZE (mm)	POCKET SIZE (mm) $B_0 \times A_0 \times K_0$	TAPE WIDTH W	REEL DIA.	QTY PER REEL	P_0	P_1
CM1205-04CS/CP	1.804 X 1.154 X 0.644	1.98 X 1.32 X 0.91	8mm	178mm (7")	3500	4mm	4mm

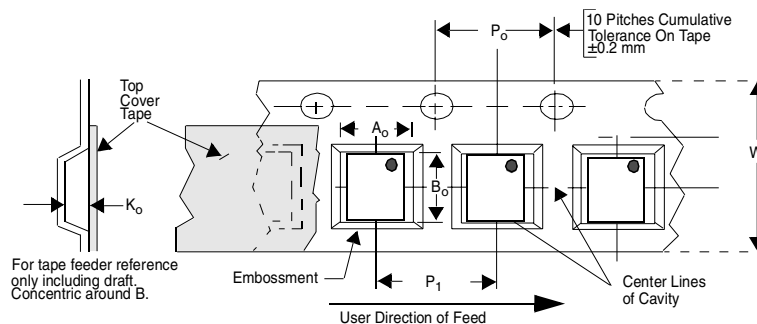



Figure 4. Tape and Reel Mechanical Data

Mechanical Details (cont'd)

CM1205-08CS/CP 10-bump CSP Mechanical Specifications

The CM1205-08CS/CP devices are packaged in a 10-bump custom Chip Scale Package (CSP). Dimensions are presented below.

PACKAGE DIMENSIONS						
Package		Custom CSP				
Bumps		10				
Dim	Millimeters			Inches		
	Min	Nom	Max	Min	Nom	Max
A1	1.109	1.154	1.199	0.0437	0.0454	0.0472
A2	3.059	3.104	3.149	0.1204	0.1222	0.1240
B1	0.645	0.650	0.655	0.0254	0.0256	0.0258
B2	0.645	0.650	0.655	0.0254	0.0256	0.0258
C1	0.202	0.252	0.302	0.0080	0.0099	0.0119
C2	0.202	0.252	0.302	0.0080	0.0099	0.0119
D1	0.638	0.707	0.776	0.0251	0.0278	0.0306
D2	0.394	0.445	0.495	0.0155	0.0175	0.0195
# per tape and reel		3500 pieces				
Controlling dimension: millimeters						

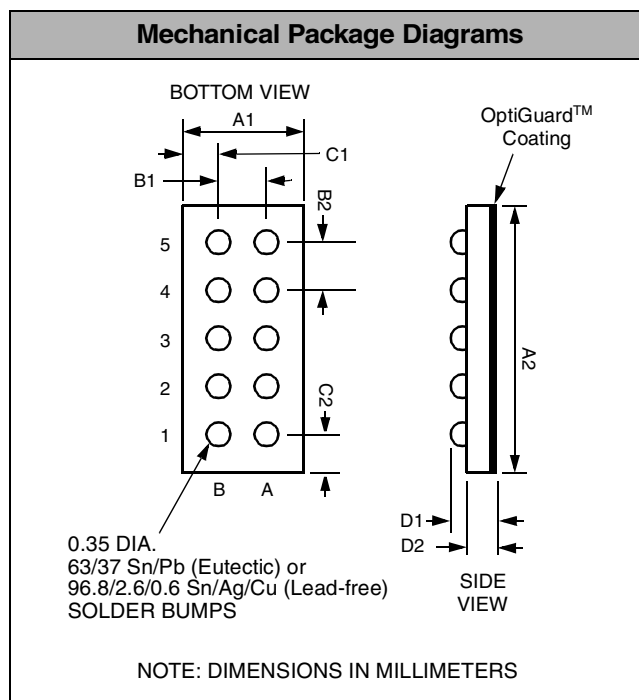

**Package Dimensions for CM1205-08CS/CP
10-bump Chip Scale Package**

CSP Tape and Reel Specifications

PART NUMBER	CHIP SIZE (mm)	POCKET SIZE (mm) $B_0 \times A_0 \times K_0$	TAPE WIDTH W	REEL DIAMETER	QTY PER REEL	P_0	P_1
CM1205-08CS/CP	3.104 X 1.154 X 0.644	3.28 X 1.32 X 0.81	8mm	178mm (7")	3500	4mm	4mm

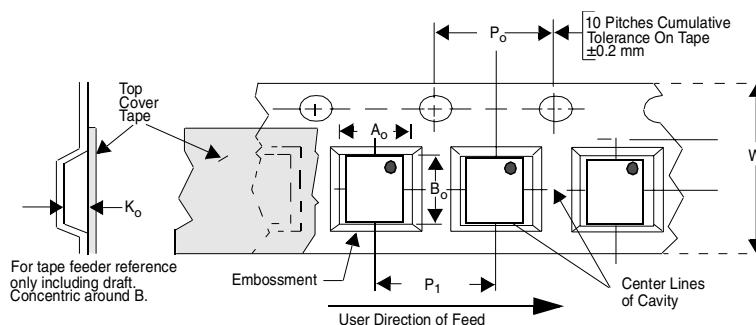



Figure 5. Tape and Reel Mechanical Data

Mechanical Details (cont'd)

CM1205-16CS/CP 20-bump CSP Mechanical Specifications

The CM1205-16CS/CP devices are packaged in a 20-bump custom Chip Scale Package (CSP). Dimensions are presented below.

PACKAGE DIMENSIONS						
Package		Custom CSP				
Bumps		20				
Dim	Millimeters			Inches		
	Min	Nom	Max	Min	Nom	Max
A1	2.409	2.454	2.499	0.0948	0.0966	0.0984
A2	3.059	3.104	3.149	0.1204	0.1222	0.1240
B1	0.645	0.650	0.655	0.0254	0.0256	0.0258
B2	0.645	0.650	0.655	0.0254	0.0256	0.0258
C1	0.202	0.252	0.302	0.0080	0.0099	0.0119
C2	0.202	0.252	0.302	0.0080	0.0099	0.0119
D1	0.638	0.707	0.776	0.0251	0.0278	0.0306
D2	0.394	0.445	0.495	0.0155	0.0175	0.0195
# per tape and reel		3500 pieces				
Controlling dimension: millimeters						

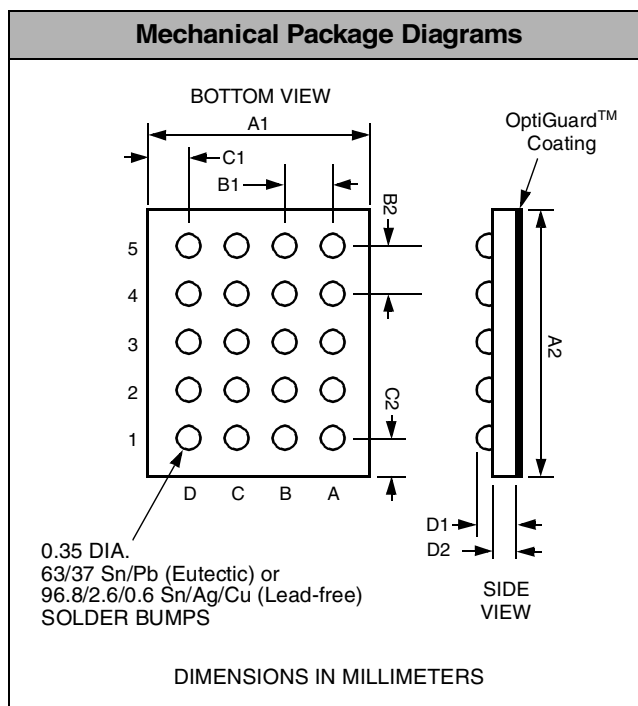

**Package Dimensions for CM1205-16CS/CP
20-bump Chip Scale Package**

CSP Tape and Reel Specifications

PART NUMBER	CHIP SIZE (mm)	POCKET SIZE (mm) $B_0 \times A_0 \times K_0$	TAPE WIDTH W	REEL DIAMETER	QTY PER REEL	P_0	P_1
CM1205-16CS/CP	3.104 X 2.454 X 0.644	3.28 X 2.64 X 0.86	8mm	178mm (7")	3500	4mm	4mm

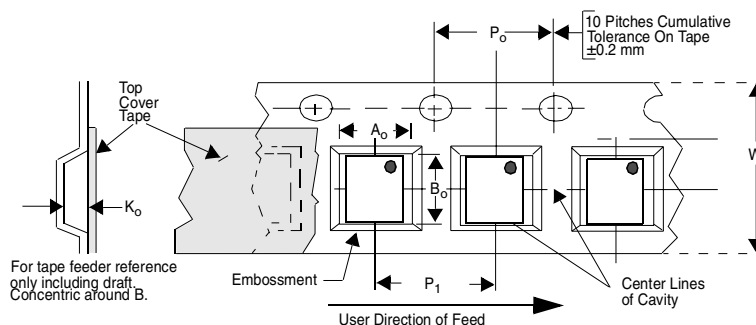


Figure 6. Tape and Reel Mechanical Data