

WPA50

50 Watt Single Output Eighth Brick DC/DC Converter



- Industry Standard Footprint & Size - 2.3" x 0.9" x 0.35" (58.42mm x 22.86mm x 9.0mm)
- High Efficiency - Up To 91%
- Wide Input Voltage Range: 36 – 75VDC with 100V/100mS Input Voltage Transient Protection
- Output Voltages: 1.2 V, 1.5V, 1.8V, 2.2V, 2.5V, 3.3V & 5.0V
- Output Trim Function with Industry Standard Equations
- Remote Output Sense
- Remote ON/OFF (Positive or Negative Logic)
- Output Overvoltage Protection
- Output Overcurrent Protection - Hiccup Mode
- Input Side "L" Filter
- No Minimum Load Required
- No Heatsinks
- Low Profile and Low Weight
- Thermal Shutdown
- Remote On/Off Control
- Isolation Voltage of 1500 VDC
- Soft Start
- High Reliability
- Fixed Frequency Operation
- Safety per UL/CUL 60950, EN 60950, Operational Insulation Meets TNV-SELV Isolation Requirements
- Meets Conducted Emissions Requirements of FCC Class B and EN55022 Class B with External Filter
- C&D Technologies, Power Electronics Division is ISO9001:2000 Certified

The WPA50 Series is a 50 Watt single output, low-profile DC-DC converter in an industry standard package of 2.3" x 0.9" x 0.35" (58.42mm x 22.86mm x 9.0mm). The WPA50 uses unique proprietary technologies to deliver ultra-high efficiencies and excellent thermal performance. It includes extensive control and protection features for maximum flexibility and provides a

versatile solution for a whole range of applications with its input voltage range of 36-75 VDC and output voltages between 1.2VDC and 5.0VDC.

The power dissipation of the WPA50 series is so low that a heat sink is not required. The product features fast dynamic response characteristics and low output ripple critical for low voltage

applications. WPA DC-DC converter modules are certified to UL/CUL 60950, and VDE to EN60950. It meets CISPR22/EN55022/FCC15J Class B specs for EMI levels with external filtering.

This high quality and highly reliable product is competitively priced and an ideal solution for distributed power, telecoms and datacom applications.

PRODUCT SELECTION CHART

MODEL	NOMINAL INPUT VOLTAGE (VDC)	RATED OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT		INPUT CURRENT RATED LOAD (A)	EFFICIENCY (%) MIN
			MIN LOAD (A)	RATED OUTPUT (A)		
WPA50R48S012	48	1.2	0.0	18	0.65	71
WPA50R48S015	48	1.5	0.0	18	0.72	79
WPA50R48S018	48	1.8	0.0	18	0.82	83
WPA50R48S022	48	2.2	0.0	18	0.99	84
WPA50R48S025	48	2.5	0.0	18	1.11	85
WPA50R48S033	48	3.3	0.0	15	1.20	89
WPA50R48S050	48	5.0	0.0	10	1.18	90

ABSOLUTE MAXIMUM RATINGS

Output Short-Circuit Duration	Continuous
Internal Power Dissipation	As low as 5 Watts
Lead Temperature (soldering, 10 seconds max)	+300°C
Continuous Input Voltage	75 VDC
Storage Temperature	+125°C
Input to Output Isolation	1500 VDC

SPECIFICATIONS, ALL MODELS

Specifications are at $T_A = +25^{\circ}\text{C}$, Airflow = 300LFM (1.5m/s) at nominal input voltage unless otherwise specified.


	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
INPUT	INPUT					
	Voltage Range	$V_{in} = 48\text{V}$, $I_o = I_{\text{Rated}}$	36	48	75	V_{DC}
	Reflected Ripple Current	$V_{in} = 48\text{V}$, $I_o = I_{\text{Rated}}$		420	550	mApk-pk
	Transient Withstand (Susceptibility)	100ms			100	V
	Inrush Charge			42		μC
	Maximum Input Current	$V_{in} = 36\text{V}$				
	1.2 Vout			0.75		A
	1.5 Vout			0.925		A
	1.8 Vout			1.10		A
	2.2 Vout			1.31		A
	2.5 Vout			1.5		A
	3.3 Vout			1.6		A
	5.0 Vout			1.55		A
	INPUT CONTROL					
	Temperature Shutdown				115	$^{\circ}\text{C}$
	Temperature Hysteresis				5	$^{\circ}\text{C}$
	Quiescent Standby Current	$V_{in} = 48\text{V}$		3	4	mA
	Power Dissipation	No Load, Remote On/Off Disabled, $V_{in} = 48\text{Vdc}$			300	mW
	Undervoltage Shutdown		31.50	32.5	35.0	V
	Undervoltage Hysteresis		0.50	2	3.00	V
OUTPUT	ISOLATION					
	Input/Output Isolation Voltage			1500	2250	V_{DC}
	Resistance			10		$M\Omega$
	Capacitance			1.5		nF
	Leakage Current	240 Vrms, 50Hz		100		μA
	OUTPUT					
	Rated Power	WPA50R48S012		22		W
		WPA50R48S015		27		W
		WPA50R48S018		33		W
		WPA50R48S022		40		W
		WPA50R48S025		45		W
		WPA50R48S033		50		W
		WPA50R48S050		50		W
	Voltage Setpoint Accuracy			1.0	1.5	% of V_{NOM}
	Output Voltage Trim Range	WPA50R48S012	1.08		1.32	V
		WPA50R48S015	1.35		1.65	V
		WPA50R48S018	1.62		1.98	V
		WPA50R48S022	1.98		2.42	V
		WPA50R48S025	2.25		2.75	V
		WPA50R48S033	3.00		3.63	V
		WPA50R48S050	4.50		5.50	V
	Temperature Coefficient			± 0.002	± 0.005	%/ $^{\circ}\text{C}$
	Output Voltage Regulation					
	Line Regulation	$V_{in} = 36\text{V} - 75\text{V}$, $I_{out} = \text{Max}$		0.1	0.2	%
	Load Regulation	$V_{in} = 48\text{V}$, $I_{out} = 0\text{-Max}$		0.1	0.2	%
	Ripple & Noise (NOTE 1)	$V_{in} = 48\text{V}$, < 20Mhz bandwidth			75	mVp-p
	Transient Response	Step change in output current (50%-100% Step @ 1A/mS)				
	1.2 Vout	$V_{in} = 48\text{V}$		100		mV
	5.0 Vout	$V_{in} = 48\text{V}$		100		mV
	Turn-On Time	$V_{in} = 48\text{V}$		200	500	mS
	Remote Sense Compensation				10	%
	Overcurrent Protection	$V_{in} = 48\text{V}$	105		140	%
	GENERAL					
	Switching Frequency		380	400	420	KHz
	MTTF per ML-HDBK-217	Circuit Stress Method		TBD		Hrs
	Ground Benign	$T_A = +25^{\circ}$				

NOTE 1: Measured at 20 MHz bandwidth across a 6 μf multi layer ceramic capacitor located approximately 1" from output terminals.

PERFORMANCE CURVES

Rev B of the WPA50 Datasheet will include extensive performance curves and graphs.

MECHANICAL

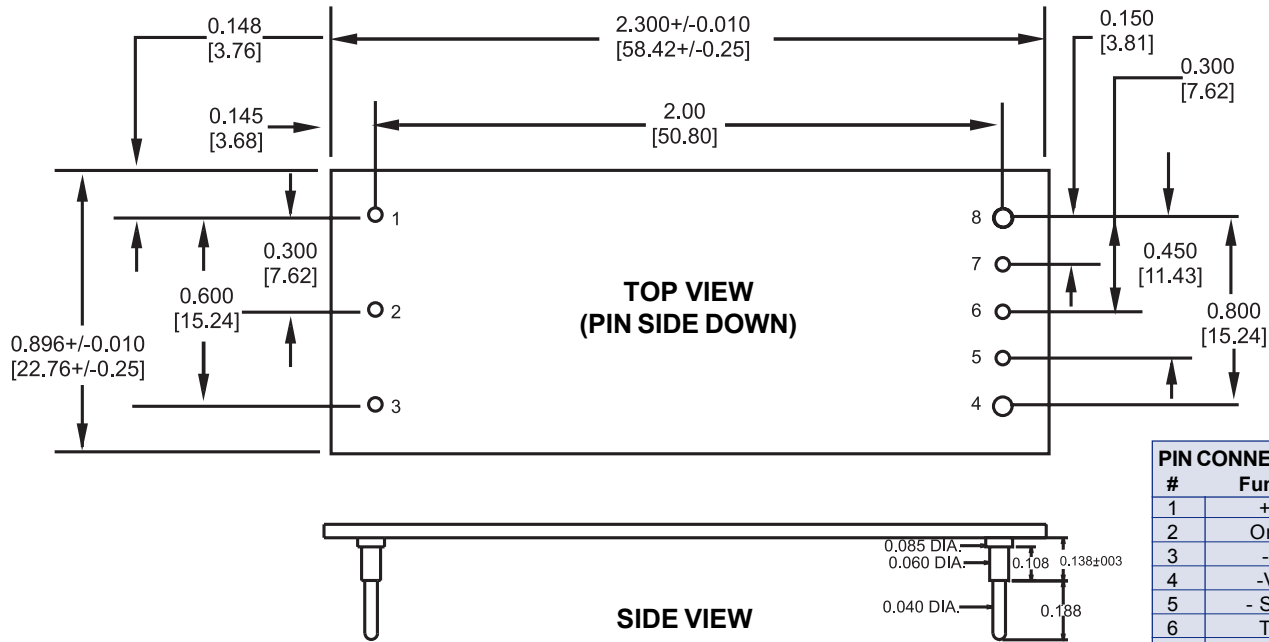

#	Function
1	+Vin
2	On/Off
3	-Vin
4	-Vout
5	- Sense
6	Trim
7	+ Sense
8	+Vout

ORDERING INFORMATION

To Find Model Number

Device Family **WPA5048S** **y** -

50 Watt, Single Output,
Eighth Brick, 48VDC Input Range

Model Number _____

Selected from Product Selection Chart (above)

y = 012 = 1.2V, 015 = 1.5V, 018 = 1.8V, 022 = 2.2V,
025 = 2.5V, 033 = 3.3V, 050 = 5.0V,

Remote On/Off Logic

No Number = Positive Logic

1 = Negative Logic _____

Model Numbers	Part Numbers
WPA50R48S012	6064958
WPA50R48S015	6064959
WPA50R48S018	6064960
WPA50R48S022	6064961
WPA50R48S025	6064962
WPA50R48S033	6064963
WPA50R48S050	6064964
WPA50R48S012-1	6064967
WPA50R48S015-1	6064968
WPA50R48S018-1	6064969
WPA50R48S022-1	6064970
WPA50R48S025-1	6064971
WPA50R48S033-1	6064972
WPA50R48S050-1	6064973

Power Electronics Division, Americas
3400 E Britannia Drive, Tucson, Arizona 85706
Tel: 800.547.2537 Fax: 520.295.4197

C&D Technologies, EMEA/Asia/Pacific
Milton Keynes MK14 5BU UK
Tel: +44 (0)1908 615232 Fax: +44 (0)1908 617545

Any data, prices, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application. C&D Technologies, Inc. does not warrant or recommend that any of its products be used in any life support or aviation or aerospace applications.