

CentralTM Semiconductor Corp.

145 Adams Avenue, Hauppauge, NY 11788 USA
Tel: (631) 435-1110 • Fax: (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

CM5160

PNP HIGH FREQUENCY
SILICON TRANSISTOR

JEDEC TO-39 CASE

DESCRIPTION

The CENTRAL SEMICONDUCTOR CM5160 is a Silicon PNP RF Transistor, mounted in a hermetically sealed package, designed for high frequency amplifier and non-saturated switching applications. This device is a replacement for the 2N5160.

MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$)

	SYMBOL		UNITS
Collector-Base Voltage	V_{CB0}	60	V
Collector-Emitter Voltage	V_{CEO}	40	V
Emitter-Base Voltage	V_{EBO}	4.0	V
Collector Current - Continuous	I_C	400	mA
Power Dissipation	P_D	1.0	W
Power Dissipation ($T_C=25^{\circ}\text{C}$)	P_D	5.0	W
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +200	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_{CBO}	$V_{CB}=28\text{V}$			1.0	μA
I_{CES}	$V_{CE}=60\text{V}$			100	μA
I_{CEO}	$V_{CB}=28\text{V}$			20	μA
BV_{CEO}	$I_C=5.0\text{mA}$	40			V
BV_{EBO}	$I_E=100\mu\text{A}$	4.0			V
$V_{CE(SAT)}$	$I_C=100\text{mA}, I_B=10\text{mA}$		0.25	0.6	V
$V_{BE(ON)}$	$V_{CE}=2.0\text{V}, I_C=100\text{mA}$		0.82	1.6	V
h_{FE}	$V_{CE}=5.0\text{V}, I_C=50\text{mA}$	30	60		
h_{FE}	$V_{CE}=5.0\text{V}, I_C=100\text{mA}$	25	50		
h_{FE}	$V_{CE}=5.0\text{V}, I_C=300\text{mA}$	12	20		
f_T	$V_{CE}=15\text{V}, I_C=50\text{mA}, f=200\text{MHz}$	500	900		MHz
C_{cb}	$V_{CB}=28\text{V}, I_E=0, f=0.1 \text{ to } 1.0 \text{ MHz}$		3.2	4.0	pF
C_{eb}	$V_{EB}=0.5\text{V}, I_C=0, f=0.1 \text{ to } 1.0 \text{ MHz}$		40	70	pF
$*t_d$	$V_{CC}=31.4\text{V}, I_C=150\text{mA}, R_C=160\Omega, R_E=26.6\Omega$		2.6		ns
$*t_r$	$V_{CC}=31.4\text{V}, I_C=150\text{mA}, R_C=160\Omega, R_E=26.6\Omega$		4.0		ns
$*t_f$	$V_{CC}=31.4\text{V}, I_C=150\text{mA}, R_C=160\Omega, R_E=26.6\Omega$		3.0		ns
$*t_s$	$V_{CC}=31.4\text{V}, I_C=150\text{mA}, R_C=160\Omega, R_E=26.6\Omega$		3.2		ns

*See Figure 1

(See Reverse Side)


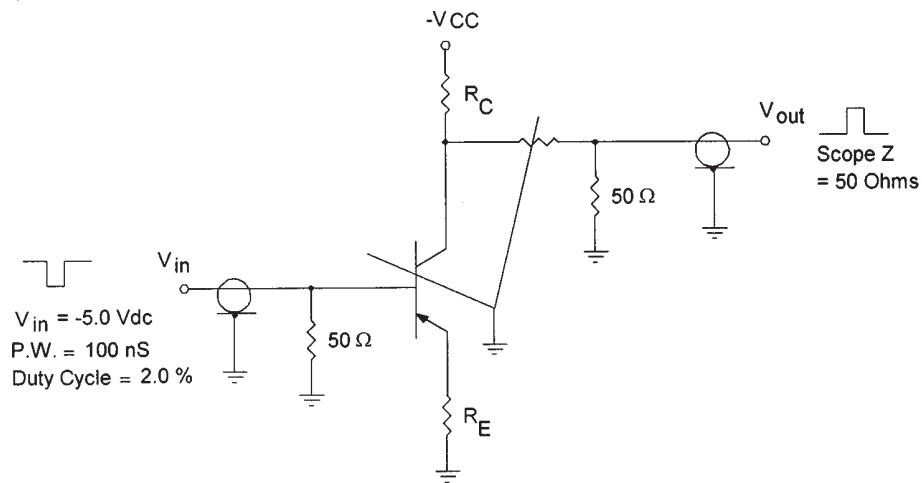


Figure 1. Switching Time Test Circuit

JEDEC TO-39 CASE - MECHANICAL OUTLINE

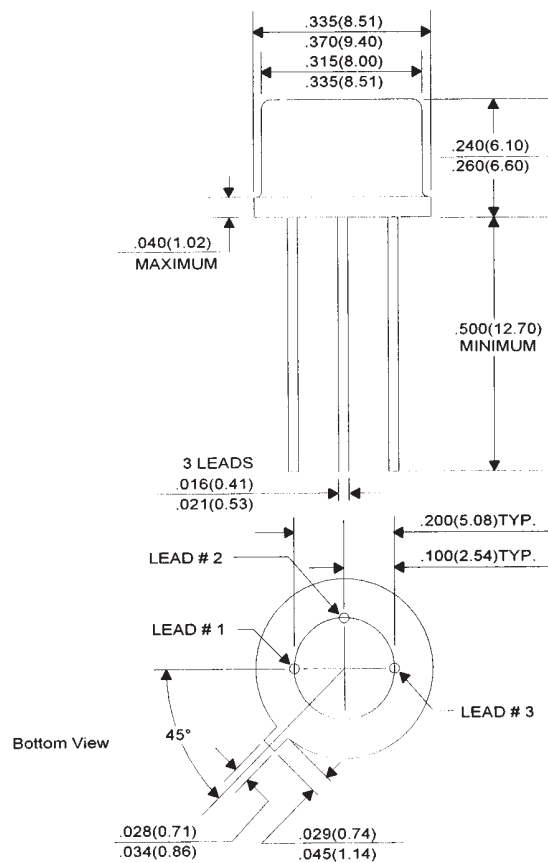

All Dimensions in Inches (mm).

Lead Code:

- 1) Emitter
- 2) Base
- 3) Collector