
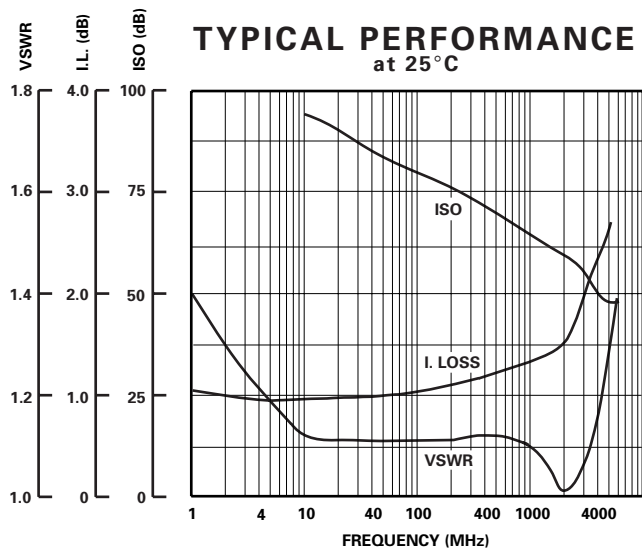
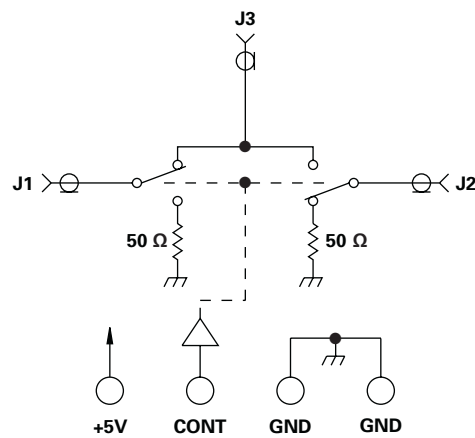


SP2T

- d** **MODEL NO.**
CDS0882
- GaAs SP2T**

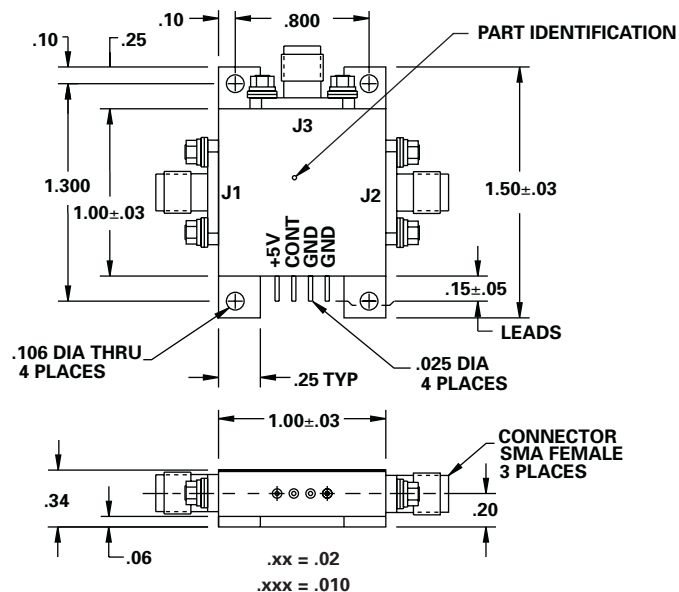

GUARANTEED PERFORMANCE

Parameter	Min	Typ	Max	Units	Conditions
Operating Frequency	5		4000	MHz	
DC Current		1	3	mA	At +5 VDC Supply
Control Type		TTL			1 Line Logic "0" = J3 - J1 Logic "1" = J3 - J2
Control Current	High	0	±40	µA	V _{IH} = +3.0V
	Low	0	±40	µA	V _{IL} = +0.5V
Insertion Loss		1.0	1.5	dB	5 - 100 MHz
		1.2	1.8	dB	100 - 1000 MHz
		1.4	2.1	dB	1000 - 2000 MHz
		2.1	3.2	dB	2000 - 4000 MHz
Isolation	70	79		dB	5 - 100 MHz
	60	69		dB	100 - 500 MHz
	55	64		dB	500 - 1000 MHz
	45	53		dB	1000 - 2000 MHz
	35	44		dB	2000 - 4000 MHz
VSWR	Thru	1.2/1	1.4/1		
	Termination	1.2/1	1.4/1		
Impedance		50		OHMS	
Switching Speed		27	35	nSEC	50% TTL to 90% / 10% RF
Transition (Rise/Fall) Time		4		nSEC	90% / 10% or 10% / 90% RF
Switching (Video) Transients		80		mV	Peak Value
Intercept Points	2nd	+70		dBm	214 MHz / 147 MHz
	3rd	+46		dBm	107 MHz / 127 MHz
RF Power	Operate	+9	+5	dBm	0.1 dB Comp. Below 100 MHz
		+17	+13	dBm	0.1 dB Comp. Above 100 MHz
	No Damage		+27	dBm	
Operating Temperature	-55	+25	+125	°C	TA