




## MODEL NUMBER DSW21998

GaAs SP2T

### FEATURES

- 0.5 - 100 MHz
- High Intercept Points
- 0.6 dB Insertion Loss
- 5 mA,  $\pm 15$  VDC
- Non Reflective
- TTL Control
- 14 Pin DIP

## SP2T

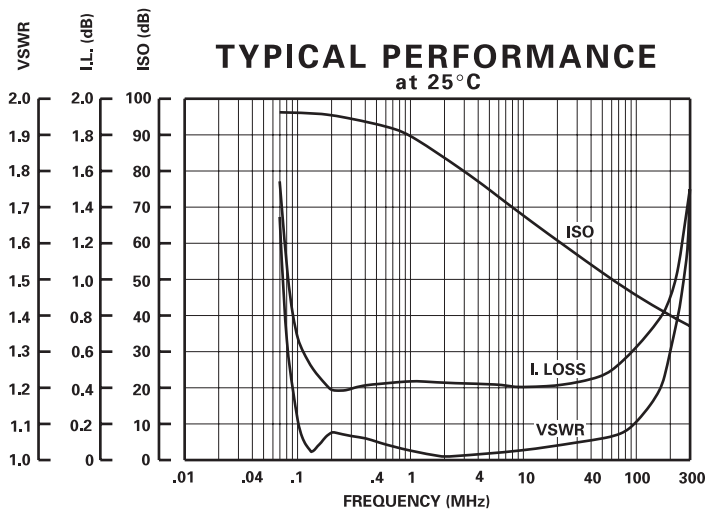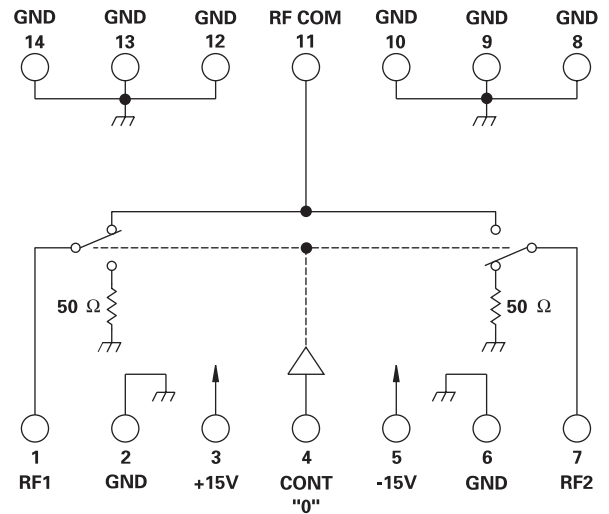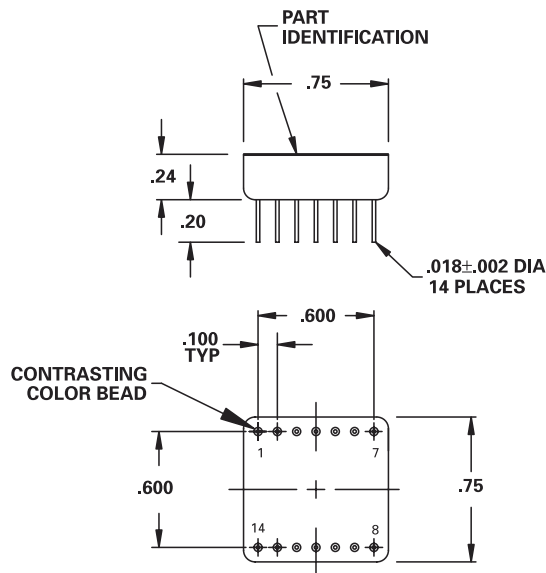

### GUARANTEED PERFORMANCE

Parameter	Min	Typ	Max	Units	Conditions
Operating Frequency	0.5		100	MHz	
DC Current		5	10	mA	At +15 VDC Supply
		4	5	mA	At -15 VDC Supply
Control Type		TTL			1 Line Logic "0" = RF COM to RF1 Logic "1" = RF COM to RF2
Isolation	64	68		dB	10 MHz
	53	57		dB	30 MHz
	42	46		dB	100 MHz
Insertion Loss		0.6	.9	dB	
VSWR		1.1/1	1.25/1		
		1.1/1	1.25/1		
Impedance		50		OHMS	
Switching Speed		5	10	$\mu$ SEC	50% TTL to 90% / 10% RF
Transition (Rise/Fall) Time		3.5	5	$\mu$ SEC	10% / 90% or 90% / 10% RF
Switching (Video) Transients		10	20	mV	Peak Value
Intercept Points	2nd	+85	+96	dBm	
	3rd	+50	+58	dBm	
RF Power	Operate	+26	+19	dBm	0.1 dB Compression
	Common Port	+31	+24	dBm	1 dB Compression
Operating Temperature	-55	+25	+125	°C	TA



DAICO Industries

310.507.3242 • FAX 310.507.5701 • www.daico.com