



DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

**GS1A / M1
THRU
GS1M / M7**

TECHNICAL SPECIFICATIONS OF SURFACE MOUNT SILICON RECTIFIER

VOLTAGE RANGE 50 to 1000 Volts

CURRENT 1.0 Ampere

FEATURES

- * Ideal for surface mounted applications
- * Low leakage current
- * Glass passivated junction

MECHANICAL DATA



- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- * Polarity: As marked
- * Mounting position: Any
- * Weight: 0.064 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.



SMA (DO-214AC)

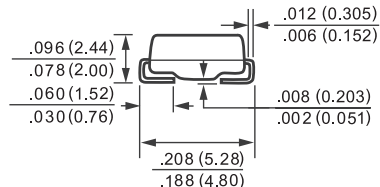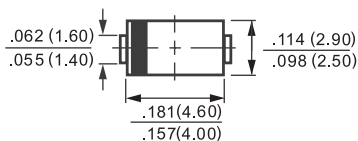

Dimensions in inches and (millimeters)

		GS1A	GS1B	GS1D	GS1G	GS1J	GS1K	GS1M		
		SYMBOL	M1	M2	M3	M4	M5	M6	M7	UNITS
Maximum Recurrent Peak Reverse Voltage		V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage		V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current at TA = 75°C		Io	1.0							Amps
Peak Forward Surge Current IFM(surge): 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)		IFSM	30							Amps
Maximum Forward Voltage at 1.0A DC		VF	1.1							Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	@TA = 25°C	Ir	5.0							uAmps
	@TA = 125°C		50							
Maximum Reverse Recovery Time (Note 3)		trr	2.5							uSec
Typical Thermal Resistance (Note 2)		RθJL	30							°C/W
Typical Junction Capacitance (Note 1)		Cj	15							pF
Operating and Storage Temperature Range		TJ, TSTG	-65 to + 175							°C

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 4.0VDC
2. Thermal Resistance (Junction to Ambient), .24in² (6.0mm²) copper pads to each terminal.
3. Test Conditions: I_F=0.5A, I_R=1.0A, I_{RR}=0.25A.

RATING AND CHARACTERISTIC CURVES

(GS1A THRU GS1M)
M1 M7

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

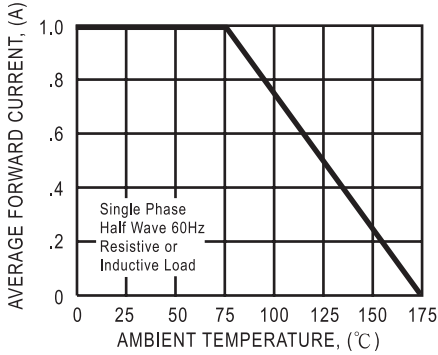


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

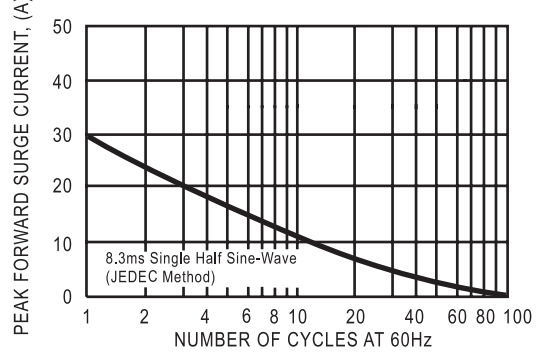


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

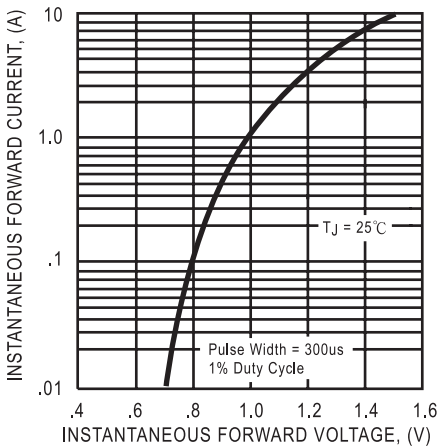


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS


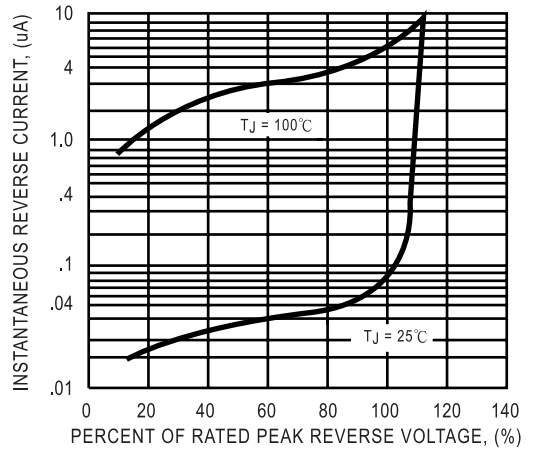


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

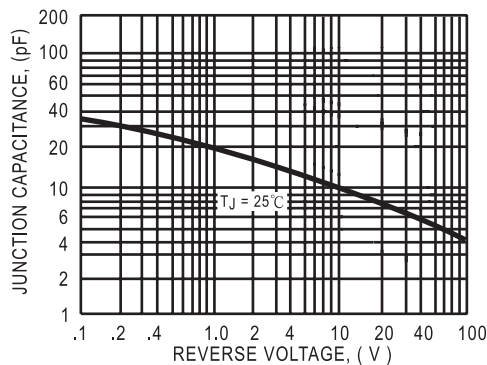

DC COMPONENTS CO., LTD.