


3mm Discrete LED

High Efficiency

Diffused

Dialight

521-94xx

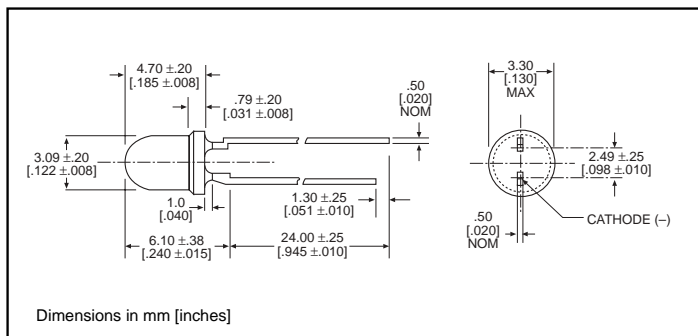

TYPE
521-9408
521-9427
521-9428

COLOR
Green
Red
Yellow

MOUNTING CLIP: 515-0006
located on page 4-65

ABSOLUTE MAXIMUM RATINGS (T_A=25°C)

	Green -9408	Red -9427	Yellow -9428
Power Dissipation (mW)	75	60	60
Forward Current (mA)	25	20	20
Derating (mA/°C) From 50°C	.5	.5	.5
Peak Current (mA)	60	60	60
Operating Temperature (°C)	-25/+85	-25/+85	-25/+85
Storage Temperature (°C)	-30/+100	-30/+100	-30/+100
Soldering Temperature	260°C, 5 seconds, 1.6 mm from case		

Solder Adherence per MIL-STD-202E, Method 208C

OPERATING CHARACTERISTICS (T_A=25°C)

		Green -9408	Red -9427	Yellow -9428
Luminous Intensity (mcd)	Min.	5.6	3.6	2.2
I _F =10mA	Typical	16	10	6.3
Peak Wavelength (nm)	Typical	563	650	585
λ Peak				
Viewing Angle (2Θ ½)	Typical	45°	45°	45°
Forward Voltage (V)	Typical	2.1	2	2.1
I _F =10mA	Max.	3	3	3
Reverse Voltage (V), I _R =10μA	Min.	3	3	3

Θ ½ is the off axis angle at which the luminous intensity is half the axial luminous intensity