


### Features

- Schottky Barrier Chip
- Guard Ring Die Construction for Transient Protection
- Low Power Loss, High Efficiency
- High Surge Capability
- High Current Capability and Low Forward Voltage Drop
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Applications
- Plastic Material: UL Flammability Classification Rating 94V-0

### Mechanical Data

- Case: Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: As Marked on Body
- Marking: Type Number
- Weight: 2.24 grams (approx.)
- Mounting Position: Any

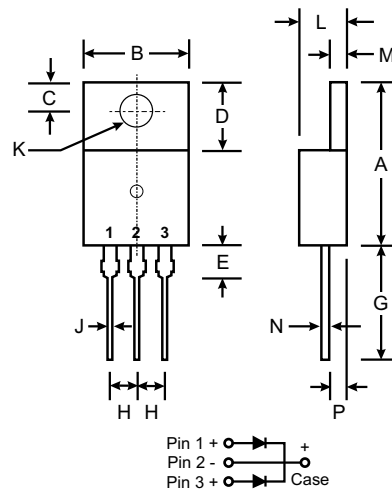

TO-220AB		
Dim	Min	Max
A	14.22	15.88
B	9.65	10.67
C	2.54	3.43
D	5.84	6.86
E	—	6.35
G	12.70	14.73
H	2.29	2.79
J	0.51	1.14
K	3.53 $\varnothing$	4.09 $\varnothing$
L	3.56	4.83
M	1.14	1.40
N	0.30	0.64
P	2.03	2.92
All Dimensions in mm		

### Maximum Ratings and Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.

Characteristic	Symbol	MBR 1530CT	MBR 1535CT	MBR 1540CT	MBR 1545CT	MBR 1550CT	MBR 1560CT	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	30	35	40	45	50	60	V
RMS Reverse Voltage	$V_R(RMS)$	21	24.5	28	31.5	35	42	V
Average Rectified Output Current @ $T_C = 125^{\circ}C$ (Note 1)	$I_o$	15						A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	150						A
Forward Voltage Drop @ $I_F = 7.5A$ , $T_C = 125^{\circ}C$ @ $I_F = 7.5A$ , $T_C = 25^{\circ}C$	$V_{FM}$	0.57 0.70				0.65 0.75		V
Peak Reverse Current @ $T_C = 25^{\circ}C$ at Rated DC Blocking Voltage @ $T_C = 125^{\circ}C$	$I_{RM}$	0.1 15				1.0 50		mA
Typical Junction Capacitance (Note 2)	$C_j$	300						pF
Typical Thermal Resistance Junction to Case (Note 1)	$R_{\theta Jc}$	1.7						$^{\circ}C/W$
Voltage Rate of Change (Rated $V_R$ )	$dV/dt$	1000			10,000			$V/\mu s$
Operating and Storage Temperature Range	$T_j, T_{STG}$	-65 to +150						$^{\circ}C$

Notes: 1. Thermal resistance junction to case mounted on heatsink.  
 2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

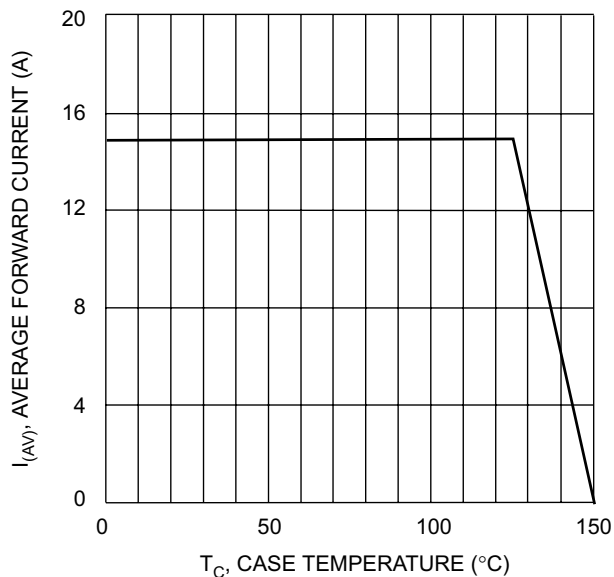


Fig. 1 Forward Current Derating Curve

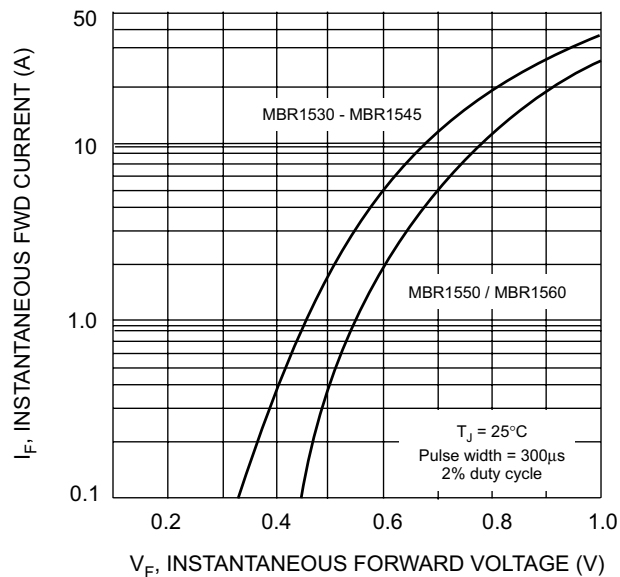


Fig. 2 Typical Forward Characteristics

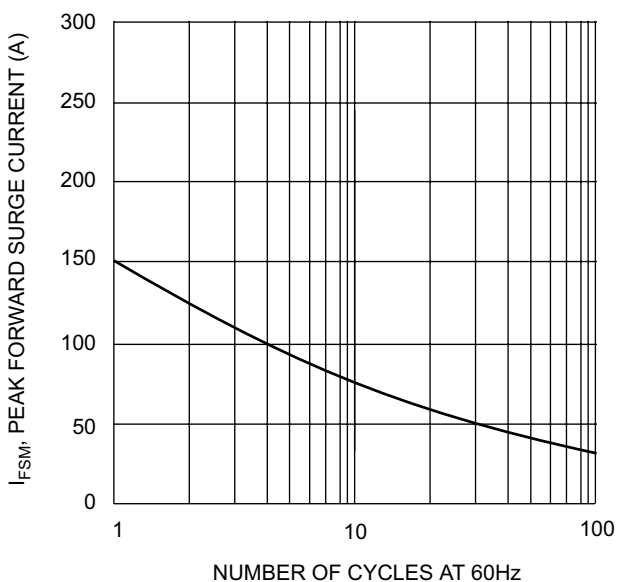


Fig. 3 Max Non-Repetitive Surge Current

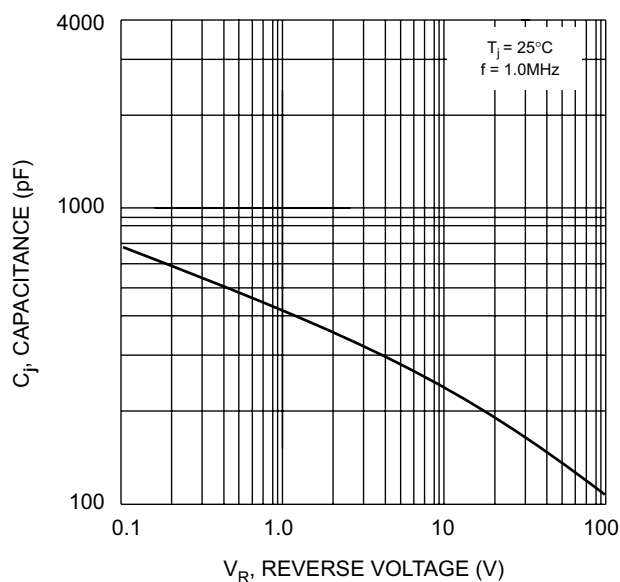


Fig. 4 Typical Junction Capacitance

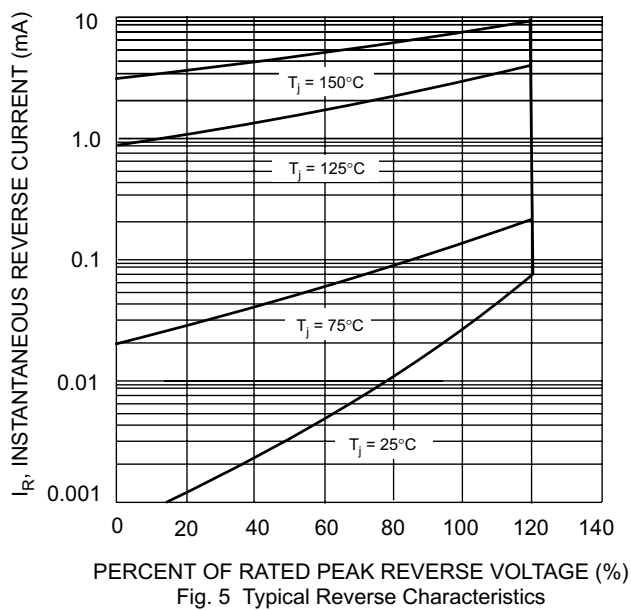


Fig. 5 Typical Reverse Characteristics