

## 8 AMP SUPER-EFFICIENT RECTIFIERS

### FEATURES


- Glass Passivated for high reliability/temperature performance
- Low switching noise
- Low forward voltage drop
- Low thermal resistance
- High switching capability
- High surge capability
- **RoHS COMPLIANT**

### MECHANICAL DATA

- Case: TO-220 molded epoxy (U/L Flammability Rating 94V-0)
- Terminals: Rectangular pins w/ standoff
- Solderability: Per MIL-STD 202 Method 208 guaranteed
- Polarity: Diode depicted on product
- Mounting Position: Any
- Weight: 0.06 Ounces (1.7 Grams)

### MECHANICAL SPECIFICATION


ACTUAL SIZE OF  
TO-220AC PACKAGE

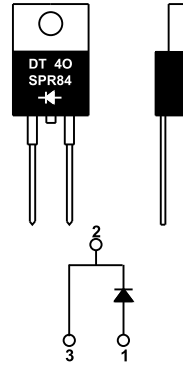

Sym	Minimum		Maximum	
	in	mm	in	mm
A	0.121*	4.75*	0.187	4.75
A1	0.14*	3.56*		
A2	0.035	0.9	0.043	1.1
B	0.09	2.3	0.102	2.6
B1	0.025*	0.64*		
B2	0.050*	1.27*		
B3			0.04	1.0
B4			0.413	10.5
C	0.59	15.0	0.61	15.5
D	0.262*	6.6*		
D1			0.16	4.0
D2	0.54	13.7	0.60	15.2
D3	0.108*	2.75*		
D4	0.126*	3.2*		
P				

\* These dimensions are "Typicals".

### NON - INSULATED PACKAGE

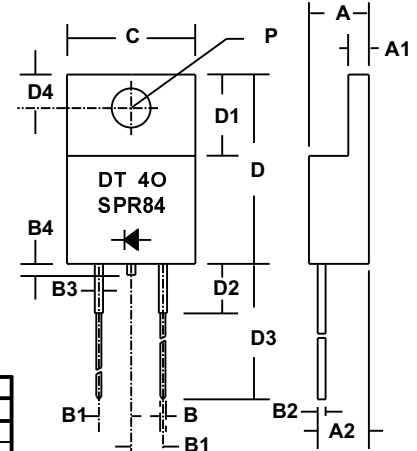

### TO - 220AC SERIES SPR81 - SPR86


### MAXIMUM RATINGS & ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive loads, derate current by 20%.

PARAMETER (TEST CONDITIONS)	SYMBOL	RATINGS						UNITS
Series Number		SPR81	SPR82	SPR83	SPR84	SPR85	SPR86	
Maximum DC Blocking Voltage	V <sub>RM</sub>	100	200	300	400	500	600	VOLTS
Maximum RMS Voltage	V <sub>RMS</sub>	70	140	210	280	350	420	
Maximum Peak Recurrent Reverse Voltage	V <sub>RRM</sub>	100	200	300	400	500	600	
Average Forward Rectified Current @ Tc = 110 °C	Io	8						AMPS
Peak Forward Surge Current ( 8.3mS single half sine wave superimposed on rated load)	IFSM	125						
Maximum Forward Voltage at 8 Amps DC	VFM	1.0			1.2			VOLTS
Maximum Average DC Reverse Current @ Tc = 25 °C At Rated DC Blocking Voltage @ Tc = 100 °C	IRM	10 500						μA
Typical Thermal Resistance, Junction to Case	RθJC	3						°C/W
Typical Junction Capacitance (Note 1)	CJ	65						pF
Maximum Reverse Recovery Time (If=0.5A, Ir=1.0A, IRR=0.25A)	TRR	35			45			nSec
Junction Operating and Storage Temperature Range	TJ, TSTG	-65 to +150						°C

NOTES: (1) Measured at 1 MHz and an applied reverse voltage of 4 volts.

4.97165588



## 8 AMP SUPER EFFICIENT RECTIFIERS

### RATING & CHARACTERISTIC CURVES FOR SERIES SPR81 - SPR86

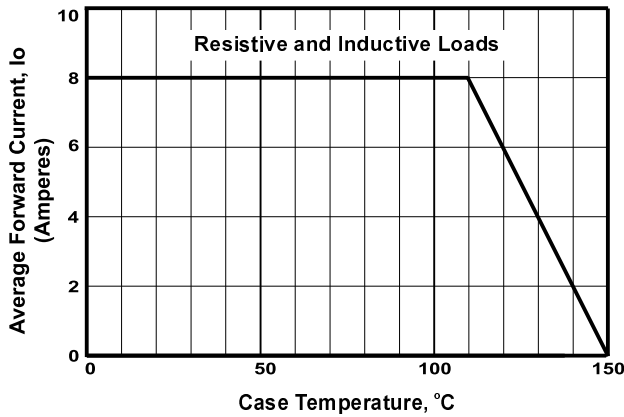


FIGURE 1. FORWARD CURRENT DERATING CURVE

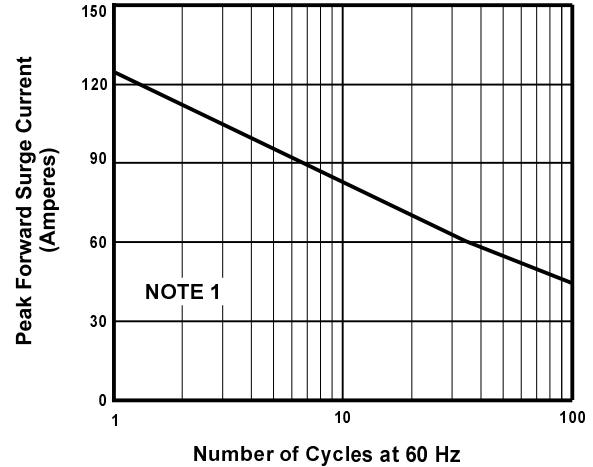


FIGURE 2. MAXIMUM NON-REPETITIVE SURGE CURRENT

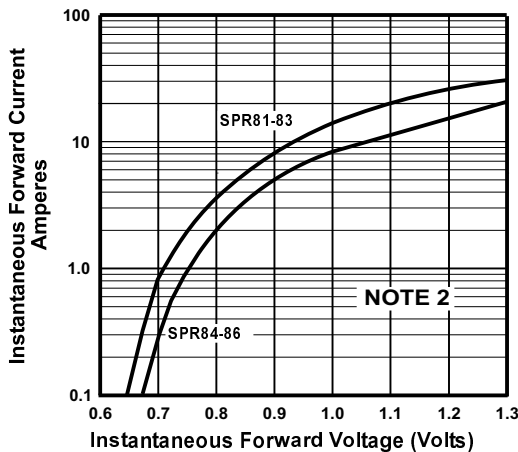


FIGURE 3. TYPICAL FORWARD CHARACTERISTICS

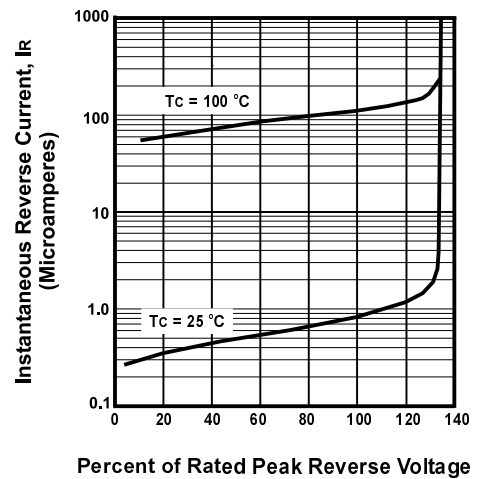


FIGURE 4. TYPICAL REVERSE CHARACTERISTICS

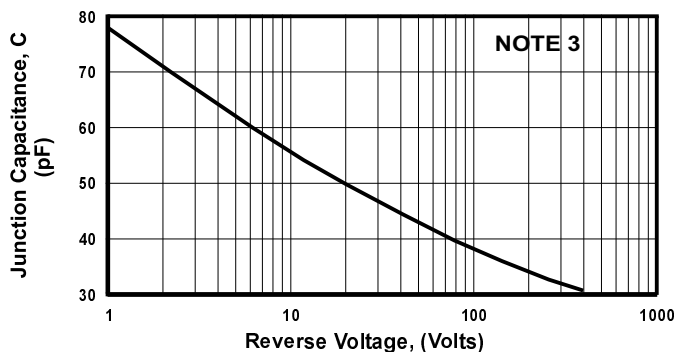


FIGURE 5. TYPICAL JUNCTION CAPACITANCE

#### NOTES

- (1) JEDEC Method, 8.3 mSec. Single Half Sine Wave
- (2) T<sub>J</sub> = 25 °C, Pulse Width = 300 μSec, 2.0% Duty Cycle
- (3) T<sub>C</sub> = 25 °C, f = 1 MHz, V<sub>SIG</sub> = 50 mV P-P