

élantec

HIGH PERFORMANCE ANALOG INTEGRATED CIRCUITS

EL2423/EL2423C

Quad De-Compensated High Speed Operational Amplifier

ELANTEC INC

T-79.07.20

Features

- Stable for gains > 10
- Wide bandwidth—500 MHz
- High slew rate—350 V/ μ s
- Wide supply range— ± 5 V to ± 15 V
- Output short circuit protected
- Low supply current—4 mA per amplifier

Applications

- High frequency active filters
- Video amplifiers
- Pulse amplifiers

Ordering Information

Part No.	Temp. Range	Package	Outline*
EL2423CJ	0°C to +75°C	CerDIP	MDP0010
EL2423CN	0°C to +75°C	P-DIP	MDP0006
EL2423J	-55°C to +125°C	CerDIP	MDP0010
EL2423J/883B	-55°C to +125°C	CerDIP	MDP0010
EL2423L/883B	-55°C to +125°C	LCC	MDP0007
EL2423CM	0°C to +75°C	SOL	MDP0027

*See 1990 Databook for package outlines.


General Description

The EL2423 monolithic quad operational amplifier is an example of Elantec's commitment to high speed low power consumption products. This amplifier is stable for gains of 10 or greater, exhibits Slew Rates of 350V per microsecond, and a Gain Bandwidth of 500 MHz while drawing supply currents of 4 mA per amplifier. The output provides short circuit protection but is capable of delivering currents in excess of 50 mA. The device is manufactured using Elantec's advanced Complementary Bipolar process.

The EL2423 is available in 14-lead Plastic DIP, 14-lead CerDIP, 20-pad LCC, and 20-pad SOL.

Elantec's products and facilities comply with MIL-STD-883, Revision C, MIL-I-45082A, and other applicable quality assurance specifications. For information on Elantec's Military processing, see QRA-2, "Elantec's Military Processing, Monolithic Integrated Circuits". For information on Elantec's Commercial processing, see QRA-1, "Summary of Elantec's Reliability and Quality Assurance Policy".

Connection Diagrams

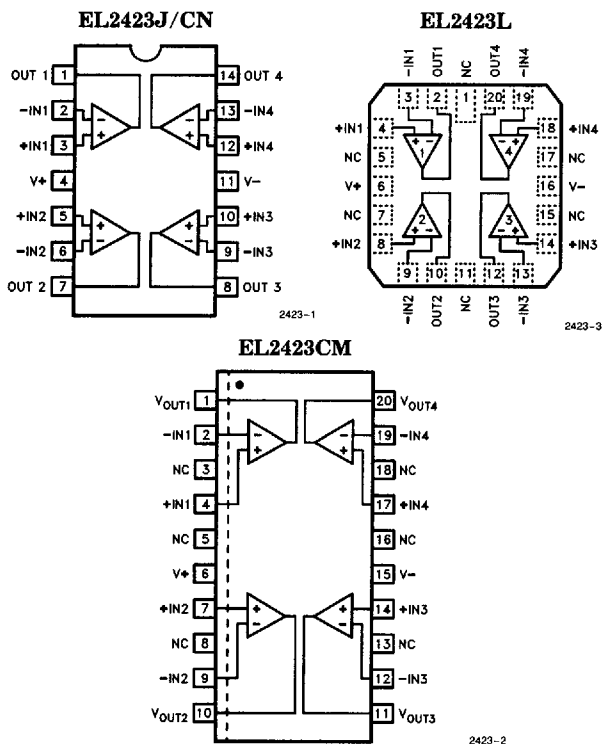

EL2423/EL2423C**Quad De-Compensated High Speed Operational Amplifier**

ELANTEC INC

EL2423/EL2423C

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$)

Voltage between V+ and V-	35V	Storage Temperature Range	-65°C to 150°C
Differential Input Voltage	6V	Maximum Junction Temperature	
Peak Output Current	Short Circuit Protected	CerDIP, LCC	175°C
Output Short Circuit Duration (Note 1)	Continuous	Plastic DIP, SOL	150°C
Internal Power Dissipation	See Curves	Lead Temperature	
Operating Temperature Range		DIP Package	300°C
EL2423	-55°C to +125°C	SOL Package	
EL2423C	0°C to +75°C	Vapor Phase (60 seconds)	215°C
		Infrared (15 seconds)	220°C

Important Note:

All parameters having Min/Max specifications are guaranteed. The Test Level column indicates the specific device testing actually performed during production and Quality Inspection. Elantec performs most electrical tests using modern high-speed automatic test equipment, specifically the LTX77 Series system. Unless otherwise noted, all tests are pulsed tests, therefore $T_J = T_C = T_A$.

Test Level	Test Procedure
I	100% production tested and QA sample tested per QA test plan QCX0002.
II	100% production tested at $T_A = 25^\circ\text{C}$ and QA sample tested at $T_A = 25^\circ\text{C}$, T_{MAX} and T_{MIN} per QA test plan QCX0002.
III	QA sample tested per QA test plan QCX0002.
IV	Parameter is guaranteed (but not tested) by Design and Characterization Data.
V	Parameter is typical value at $T_A = 25^\circ\text{C}$ for information purposes only.

1

DC Electrical Characteristics $V_S = \pm 15\text{V}$; $R_L = 2\text{ k}\Omega$, unless otherwise specified

Parameter	Description	Temp	EL2423				EL2423C				Units
			Min	Typ	Max	Test Level	Min	Typ	Max	Test Level	
V_{OS}	Offset Voltage	25°C		1.0	6	I		1.0	6	I	mV
		Full			10	I			10	III	mV
TCV_{OS}	Average Offset Voltage Drift	Full		10		V		10		V	$\mu\text{V}/^\circ\text{C}$
I_B	Bias Current	25°C		1.0	4	I		1.0	4	I	μA
		Full			6	I			6	III	μA
I_{OS}	Offset Current	25°C		0.5	2	I		0.5	2	I	μA
		Full			3	I			3	III	μA
R_{IN}	Input Resistance	25°C		20		V		20		V	k Ω
C_{IN}	Input Capacitance	25°C		1		V		1		V	pF
V_{CM}	Common Mode Input Range	Full	± 10	± 11		I	± 10	± 11		II	V
e_{IN}	Input Noise Voltage ($f = 1\text{ kHz}$, $R_G = 0\Omega$)	25°C		7		V		7		V	$\text{nV}/\sqrt{\text{Hz}}$
A_{VOL}	Large Signal Voltage Gain (Notes 2, 3)	25°C	20k	40k		I	20k	40k		I	V/V
		Full	10k			I	10k			III	V/V
$CMRR$	Common-Mode Rejection Ratio (Note 4)	Full	70	80		I	70	80		II	dB

EL2423/EL2423C**Quad De-Compensated High Speed Operational Amplifier**

ELANTEC INC

DC Electrical Characteristics $V_S = \pm 15V$; $R_L = 2\text{ k}\Omega$, unless otherwise specified — Contd.

Parameter	Description	Temp	EL2423				EL2423C				Units
			Min	Typ	Max	Test Level	Min	Typ	Max	Test Level	
V_O	Output Voltage Swing	Full	± 11	± 12		I	± 11	± 12		II	V
I_{SC}	Short Circuit Current	25°C	± 10	+ 50	± 85	I	± 10	± 50	± 85	I	mA
R_O	Output Resistance	25°C		40		V		40		V	Ω
I_S	Supply Current	Full		16	18	I		16	18	II	mA
PSRR	Power Supply Rejection Ratio (Note 5)	Full	70	80		I	70	80		II	dB

AC Electrical Characteristics $V_S = \pm 15V$; $R_L = 2\text{ k}\Omega$, unless otherwise specified

Parameter	Description	Temp	EL2423				EL2423C				Units
			Min	Typ	Max	Test Level	Min	Typ	Max	Test Level	
f_u	Open Loop Unity Bandwidth (Note 6)	25°C		200		V		200		V	MHz
FPBW	Full Power Bandwidth (Note 7)	25°C	3.48	5.5		I	4.7	5.5		I	MHz
t_r	Rise Time (Note 6)	25°C		7		V		7		V	ns
OS	Overshoot (Note 6)	25°C		20		V		20		V	%
SR	Slew Rate (Note 6)	25°C	250	350		I	250	350		I	V/ μ s
t_s	Settling Time (Note 9) 10V Step to 0.05%	25°C		330		V		330		V	ns
CHSp	Channel Separation $f = 1\text{ MHz}$	25°C		65		V		65		V	dB

Note 1: A heat sink is required to keep the junction temperature below absolute maximum when the output is shorted.

Note 2: $V_O = \pm 10V$.Note 3: $R_L = 2\text{ k}\Omega$.Note 4: Two tests are performed. $V_{CM} = 0V$ to $+10V$ and $V_{CM} = 0V$ to $-10V$.Note 5: Two tests are performed. $V+ = 15V$, and $V-$ is changed from $-5V$ to $-15V$. $V- = -15V$, and $V+$ is changed from $+5V$ to $+15V$.Note 6: $V_O = 100\text{ mV}$.Note 7: Full Power Bandwidth guaranteed based on slew rate measurement using: $FPBW = \text{Slew Rate}/2\pi V_{peak}$.

Note 8: Refer to Test Circuit section of data sheet.







Note 9: Settling time measurements are made with techniques in the following reference: "Take The Guesswork Out of Settling-Time Measurements," EDN September 19, 1985.

EL2423/EL2423C

Quad De-Compensated High Speed Operational Amplifier







ELANTEC INC

Typical Performance Curves

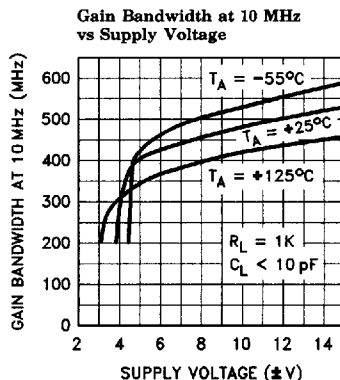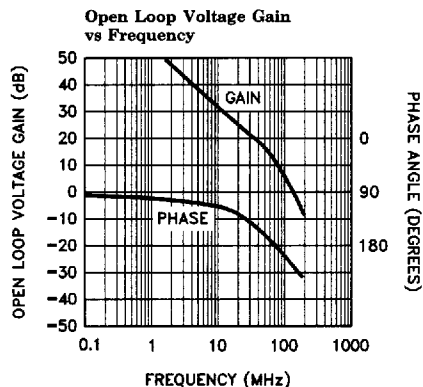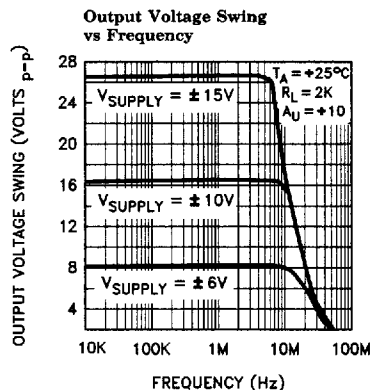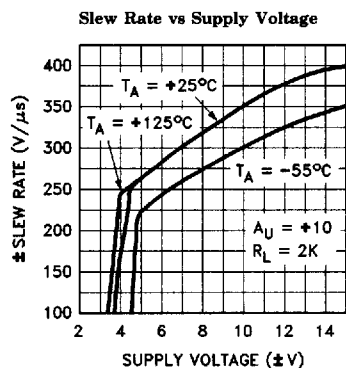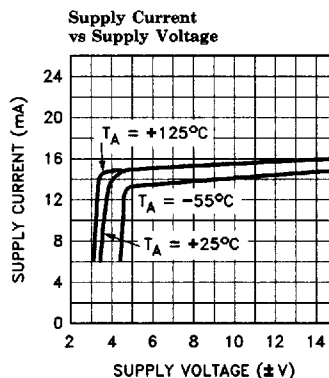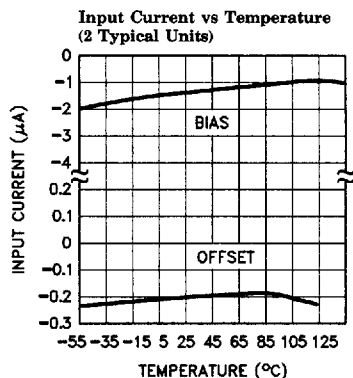

EL2423/EL2423C


ELANTEC INC

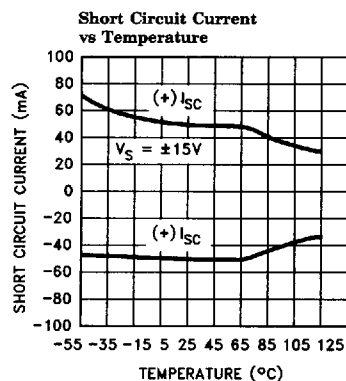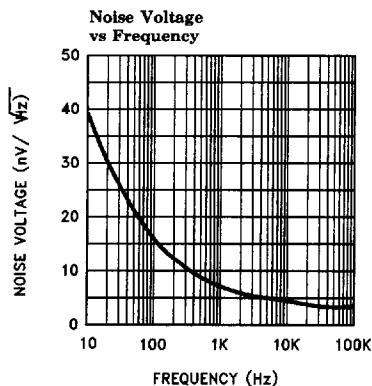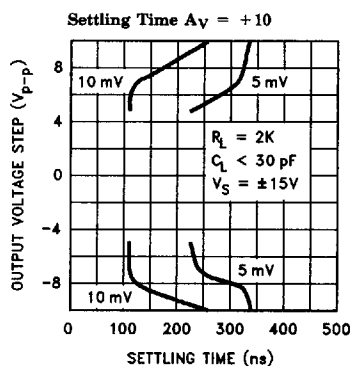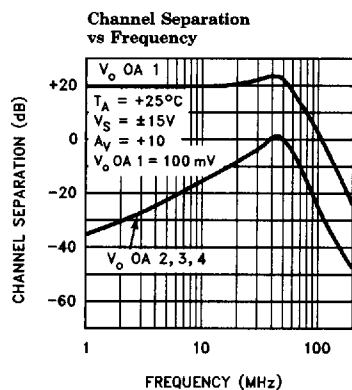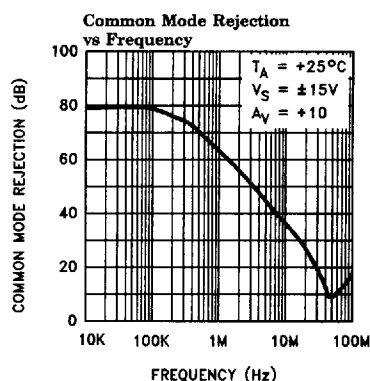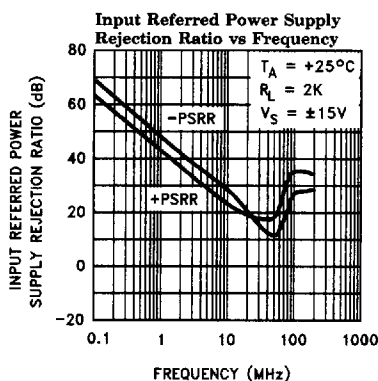Quad De-Compensated High Speed Operational Amplifier**Typical Performance Curves — Contd.**

ELANTEC INC


EL2423/EL2423C**Quad De-Compensated High Speed Operational Amplifier**

EL2423/EL2423C

Typical Performance Curves — Contd.**Large Signal Response**

$A_V = +10$
 $V_{IN} = \pm 0.5V$
 $V_O = \pm 5V$
 $R_L = 2k$


2423-6

Small Signal Response

$A_V = +10$
 $V_{IN} = \pm 10 \text{ mV}$
 $V_O = \pm 100 \text{ mV}$
 $R_L = 2k$


2423-7

20-Lead SOL
 Maximum Power Dissipation
 vs Ambient Temperature




2423-8

14-Lead Plastic DIP
 Maximum Power Dissipation
 vs Ambient Temperature



2423-9


14-Lead CerDIP
 Maximum Power Dissipation
 vs Ambient Temperature

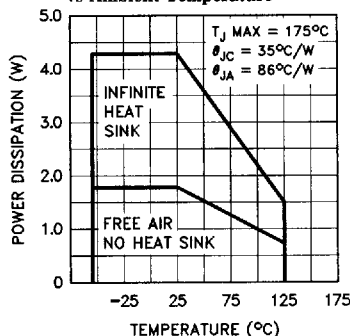


2423-11

EL2423/EL2423C

ELANTEC INC

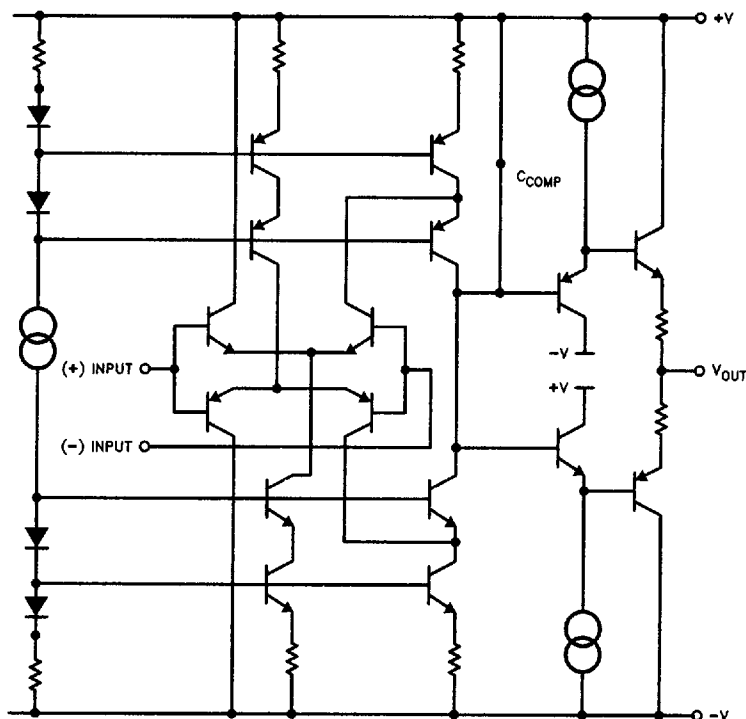
Quad De-Compensated High Speed Operational Amplifier**Simplified Schematic (One Amplifier)**

2423-12

Test Circuit

2423-13

Pin numbers indicated are for the 14-lead DIP. Circuit is identical for all package types.

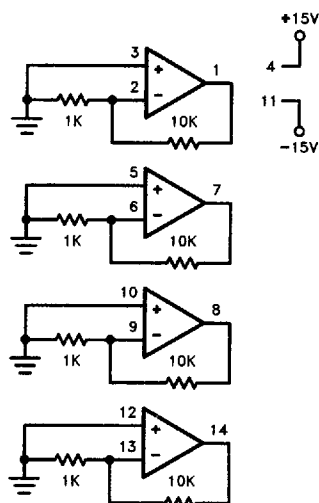Burn In Circuit

2423-14

EL2423/EL2423C**Quad De-Compensated High Speed Operational Amplifier**

ELANTEC INC

EL2423 Macromodel

* Connections:

	+ input	- input	+ Vsupply	- Vsupply	output
*					
*					
*					
*					
*					

.subckt M2423 3 2 7 4 6

* Input stage

ie 37 4 2mA
 r6 36 37 60
 r7 38 37 60
 rc1 7 30 75
 rc2 7 39 75
 q1 30 3 36 qn
 q2 39 2 38 qna
 ediff 33 0 39 30 7.25
 rdifff 33 0 1Meg

* Compensation Section

ga 0 34 33 0 2.6m
 rh 34 0 3Meg
 ch 34 0 1.5pF
 rc 34 40 600
 cc 40 0 7pF

* Poles

ep 41 0 40 0 1
 rpa 41 42 75
 cpa 42 0 25pF
 rpb 42 43 50
 cpb 43 0 15pF

* Output Stage

ios1 7 50 1.25mA
 ios2 51 4 1.25mA
 q3 4 43 50 qp
 q4 7 43 51 qn
 q5 7 50 52 qn
 q6 4 51 53 qp
 ros1 52 6 25
 ros2 6 53 25

* models


.model qn npn(is=800.0E-18 bf=250 tf=0.2nS)
 .model qna npn(is=864E-18 bf=300 tf=0.2nS)
 .model qp pnp(is=800E-18 bf=60 tf=0.2nS)
 .ends

EL2423/EL2423C

ELANTEC INC

Quad De-Compensated High Speed Operational Amplifier

EL2423 Macromodel — Contd.

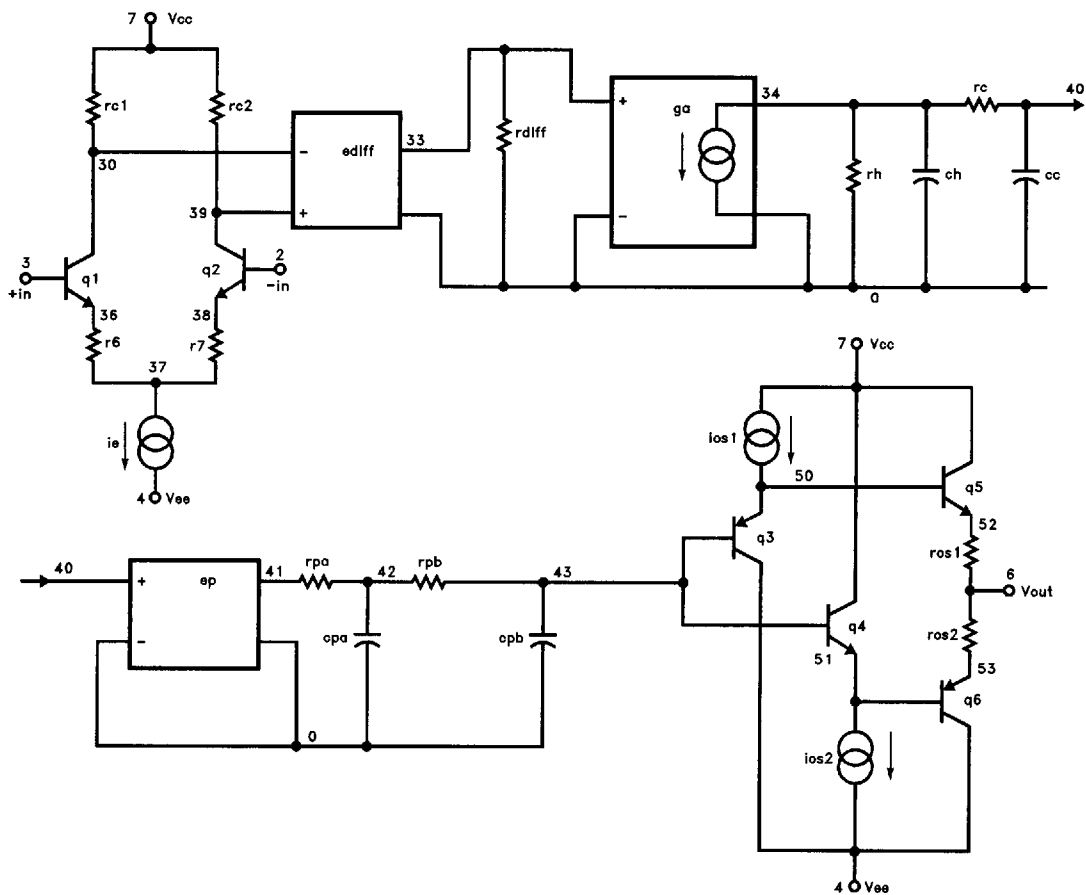

2423-15