


ENERGIZER NO. 1250

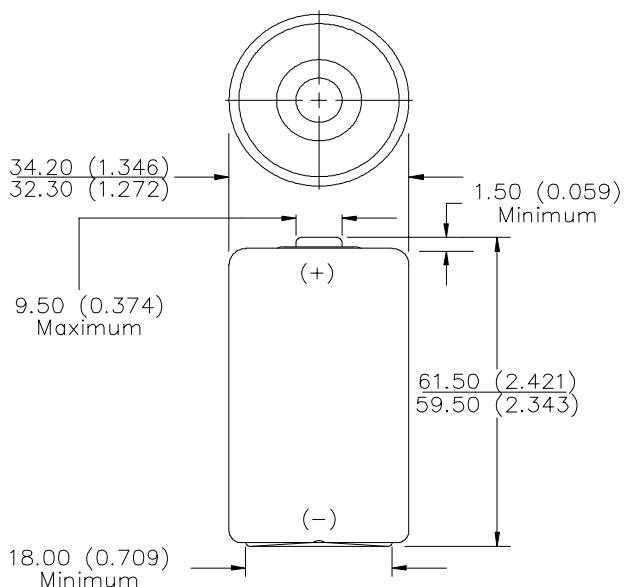

SUPER HEAVY DUTY

Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)
(No Added Mercury or Cadmium)

Designation: ANSI-13D, IEC-R20

Battery Voltage: 1.5 Volts

Operating Temp: -18°C to 55°C (0°F to 130°F)

Average Weight: 89.0 grams (3.1 oz.)


Volume: 53 cubic centimeters (3.2 cubic inch)

Average Capacity: 8,000 mAh to 0.8 volts
(Rated at 25 mA continuous at 21°C)


Cell: One No. 50 (size "D")

Jacket: Metal


TYPICAL PERCENT SERVICE 3.9 ohm - 4 hours/day to 0.75 volts




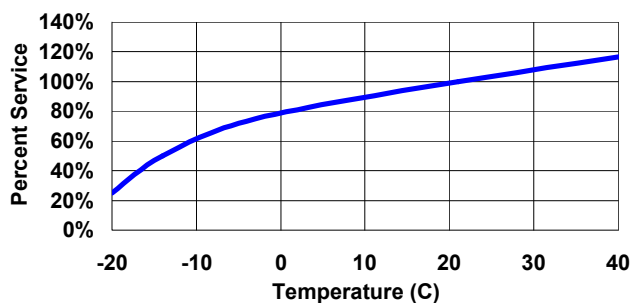


CONSTANT RESISTANCE PERFORMANCE Typical Service

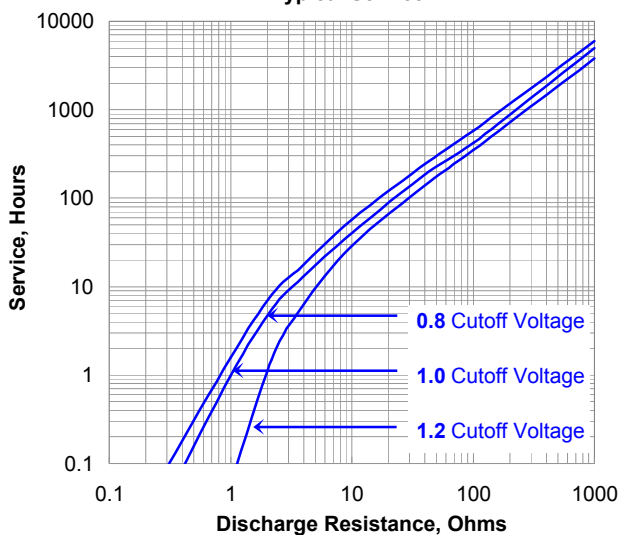

CONSTANT CURRENT DISCHARGE Typical Service

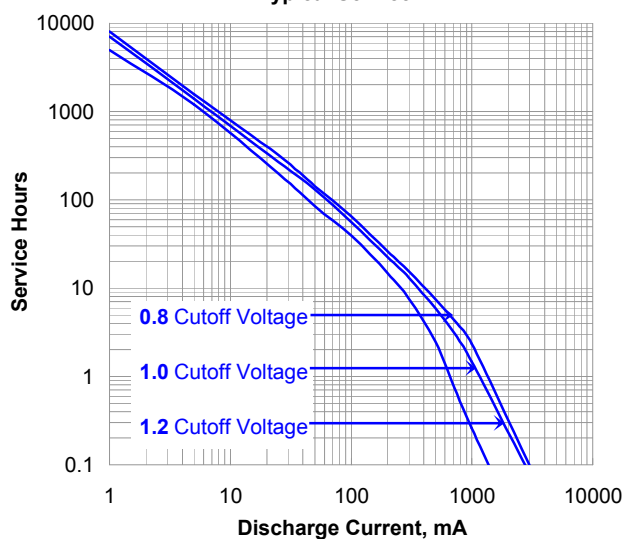

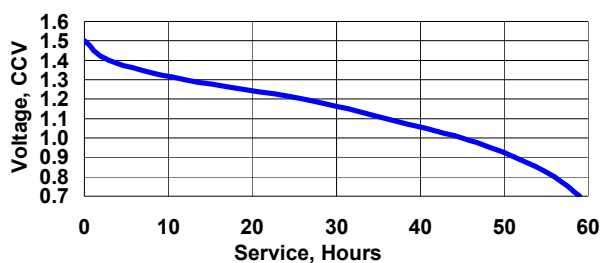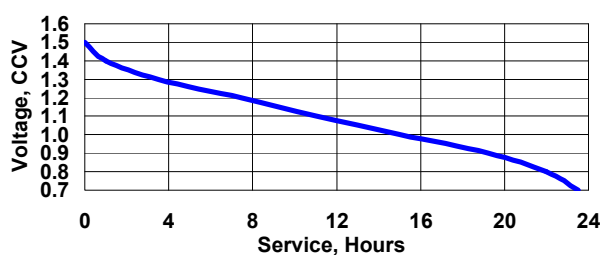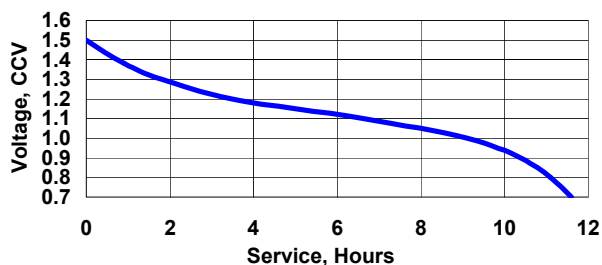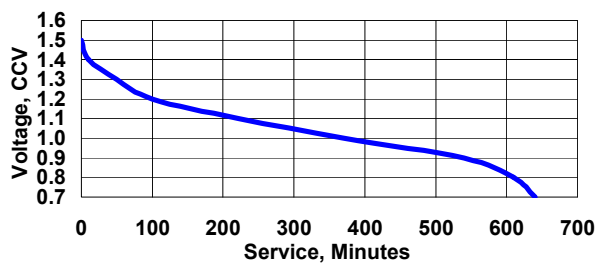ENERGIZER NO. 1250**ANSI Industry Standard Tests @ 20° C****RADIO**
10 ohm - 4 hours/day**PORTABLE STEREO**
3.9 ohm - 1 hr/day**TOY**
2.2 ohm - 1 hr/day**PORTABLE LIGHT**
2.2 ohms - 4 min/hour 8 hours/day**Important Notice**

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved