


# MODELS 898, 899

## R/2R Ladder

## Dual-In-Line

## Thick Film

## Resistor Networks

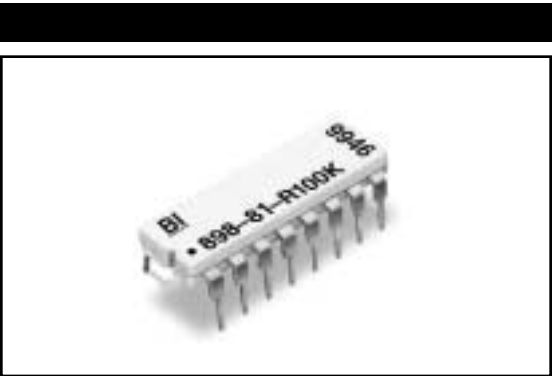

### ELECTRICAL

Standard Resistance Range, Ohms	1K to 500K
Standard Resistance Tolerance, at 25°C	±2%
Operating Temperature Range	-40°C to +70°C
Temperature Coefficient of Resistance	±100ppm/°C
Maximum Operating Voltage	100Vdc or √PR
Insulation Resistance	≥10,000 Megohms
Ladder Network Accuracy	8 Bits: ±1/2LSB, -40°C to +70°C 10 Bits: ±1LSB, -40°C to +70°C

### MECHANICAL

Lead Material	Copper Alloy, 60/40 Tin-Lead Plating
Substrate Material	Alumina
Resistor Material	Cermet


### APPLICABLE DOCUMENTS

MIL-R-83401 — Resistor Networks, Fixed, Film, General Specifications
MIL-STD-202 — Test Methods for Electronic and Electrical Component Parts
MIL-STD-105 — Sampling Procedures and Tables for Inspection by Attributes

Specifications subject to change without notice.


4

## OUTLINE DIMENSIONS (Inch/mm)

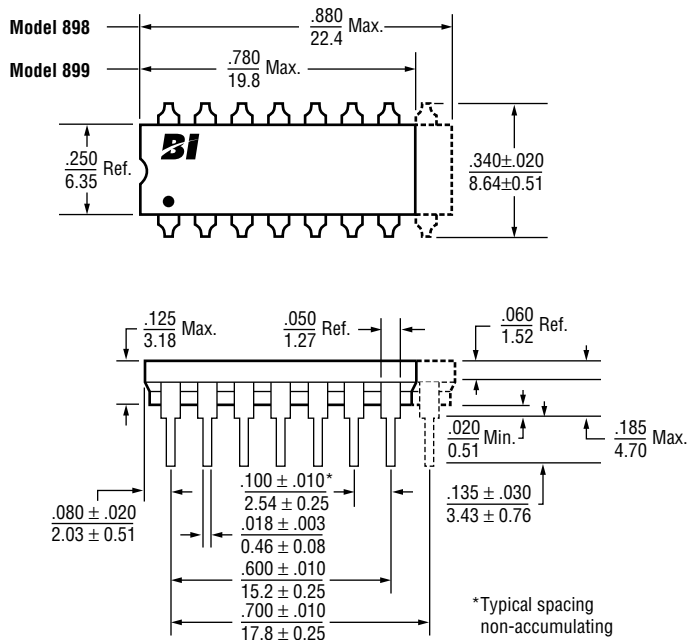


## SCHEMATICS


**898-81 Circuit**  
8 Bits, 16 Leads



**898-82 Circuit**  
8 Bits, 16 Leads



**899-10 Circuit**  
10 Bits, 14 Leads




Note: Custom configurations are available. Consult factory.

**STANDARD RESISTANCE VALUES, OHMS**

R/2R	R/2R	R/2R
10K/20K	25K/50K	100K/200K
	50K/100K	

**POWER DISSIPATION, WATTS AT 70°C**

Model	Per Package	Per Resistor
898-8X	0.8	.050
899-10	1.0	.050

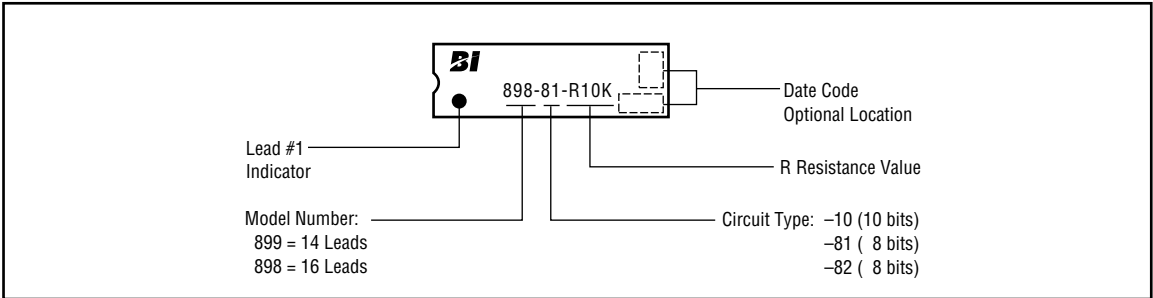**TYPICAL PART MARKING****PACKAGING**

**Standard:** Magazines  
All Units oriented with lead #1 to the same side.

Magazine:	Material	=	Antistatic Plastic
	Capacity	=	25 Units

**ORDERING INFORMATION**