

GENERAL DESCRIPTION


This advanced MOSFET is designed to withstand high energy in avalanche and commutation modes. The new energy efficient design also offers a drain-to-source diode with a fast recovery time. Designed for low voltage, high speed switching applications in power supplies, converters and PWM motor controls, these devices are particularly well suited for bridge circuits where diode speed and commutating safe operating areas are critical and offer additional and safety margin against unexpected voltage transients.

FEATURES


- ◆ Avalanche Energy Specified
- ◆ Source-to-Drain Diode Recovery Time Comparable to a Discrete Fast Recovery Diode
- ◆ Diode is Characterized for Use in Bridge Circuits
- ◆ I_{DSS} and $V_{DS(on)}$ Specified at Elevated Temperature
- ◆ Surface Mount Package: TO-252

PIN CONFIGURATION

TO-252
Front View



SYMBOL



ABSOLUTE MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Drain to Current — Continuous	I_D	3.0	A
— Pulsed	I_{DM}	9.0	
Gate-to-Source Voltage — Continue	V_{GS}	± 20	V
— Non-repetitive	V_{GSM}	± 40	V
Total Power Dissipation	P_D	40	W
Derate above 25°C		0.32	W/°C
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to 150	°C
Single Pulse Drain-to-Source Avalanche Energy — $T_J = 25^\circ\text{C}$ ($V_{DD} = 100\text{V}$, $V_{GS} = 10\text{V}$, $I_L = 20\text{A}$, $L = 10\text{mH}$, $R_G = 25\Omega$)	E_{AS}	45	mJ
Thermal Resistance — Junction to Case	θ_{JC}	3.13	°C/W
— Junction to Ambient	θ_{JA}	100	
Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 10 seconds	T_L	260	°C

ELECTRICAL CHARACTERISTICS

Unless otherwise specified, $T_J = 25^\circ\text{C}$.

Characteristic		Symbol	Min	Typ	Max	Units
Drain-Source Breakdown Voltage ($V_{GS} = 0\text{ V}$, $I_D = 250\text{ }\mu\text{ A}$)		$V_{(BR)DSS}$	250			V
Drain-Source Leakage Current ($V_{DS} = 250\text{ V}$, $V_{GS} = 0\text{ V}$) ($V_{DS} = 250\text{ V}$, $V_{GS} = 0\text{ V}$, $T_J = 125^{\circ}\text{C}$)		I_{DSS}			10 100	$\mu\text{ A}$
Gate-Source Leakage Current-Forward ($V_{gsf} = 20\text{ V}$, $V_{DS} = 0\text{ V}$)		I_{GSSF}			100	nA
Gate-Source Leakage Current-Reverse ($V_{gsr} = 20\text{ V}$, $V_{DS} = 0\text{ V}$)		I_{GSSR}			100	nA
Gate Threshold Voltage ($V_{DS} = V_{GS}$, $I_D = 250\text{ }\mu\text{ A}$)		$V_{GS(th)}$	2.0		4.0	V
Static Drain-Source On-Resistance ($V_{GS} = 10\text{ V}$, $I_D = 1.5\text{ A}$) *		$R_{DS(on)}$		1.4	2.0	Ω
Drain-Source On-Voltage ($V_{GS} = 10\text{ V}$) ($I_D = 3.0\text{ A}$)		$V_{DS(on)}$		5.04	7.2	V
Forward Transconductance ($V_{DS} = 15\text{ V}$, $I_D = 1.5\text{ A}$) *		g_{FS}		2.3		S
Input Capacitance	$(V_{DS} = 25\text{ V}$, $V_{GS} = 0\text{ V}$, $f = 1.0\text{ MHz}$)	C_{iss}		307	430	pF
Output Capacitance		C_{oss}		57	75	pF
Reverse Transfer Capacitance		C_{rss}		14	25	pF
Turn-On Delay Time		$(V_{DD} = 125\text{ V}$, $I_D = 3.0\text{ A}$, $V_{GS} = 10\text{ V}$, $R_G = 4.7\Omega$) *	$t_{d(on)}$		7.0	15
Rise Time	t_r			5.0	15	ns
Turn-Off Delay Time	$t_{d(off)}$			15	30	ns
Fall Time	t_f			6.0	15	ns
Total Gate Charge	$(V_{DS} = 200\text{ V}$, $I_D = 3.0\text{ A}$, $V_{GS} = 10\text{ V}$)*	Q_g		9.8	15	nC
Gate-Source Charge		Q_{gs}		2.1		nC
Gate-Drain Charge		Q_{gd}		4.2		nC
Internal Drain Inductance (Measured from the drain lead 0.25" from package to center of die)		L_D		4.5		nH
Internal Drain Inductance (Measured from the source lead 0.25" from package to source bond pad)		L_S		7.5		nH
SOURCE-DRAIN DIODE CHARACTERISTICS						
Forward On-Voltage(1)	$(I_S = 3.0\text{ A}$, $d_{IS}/d_t = 100\text{ A}/\mu\text{s}$)	V_{SD}		0.9	1.6	V
Forward Turn-On Time		t_{on}		**		ns
Reverse Recovery Time		t_{rr}		153		ns

* Pulse Test: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$

** Negligible, Dominated by circuit inductance

TYPICAL ELECTRICAL CHARACTERISTICS

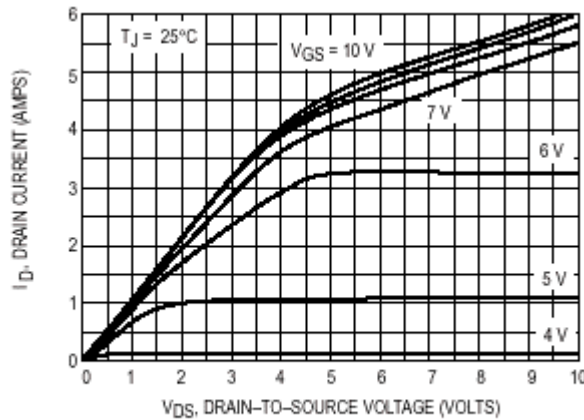


Figure 1. On-Region Characteristics

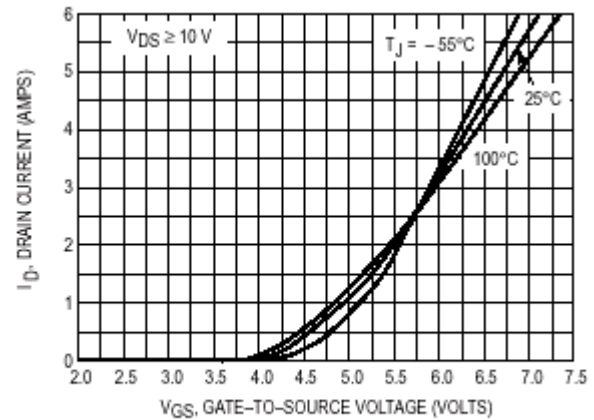


Figure 2. Transfer Characteristics

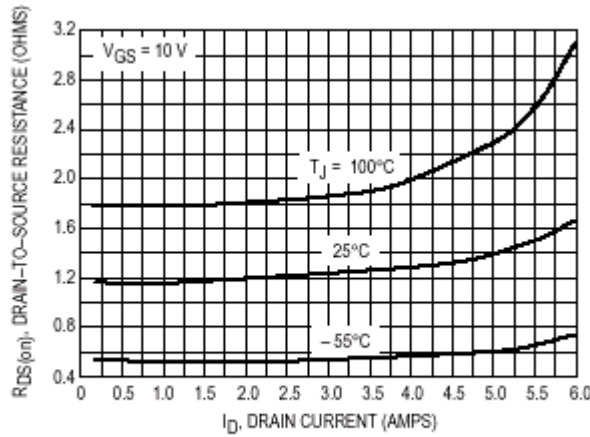


Figure 3. On-Resistance versus Drain Current and Temperature

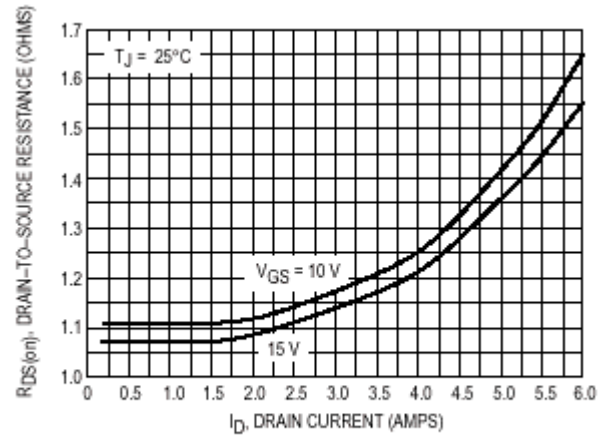


Figure 4. On-Resistance versus Drain Current and Gate Voltage

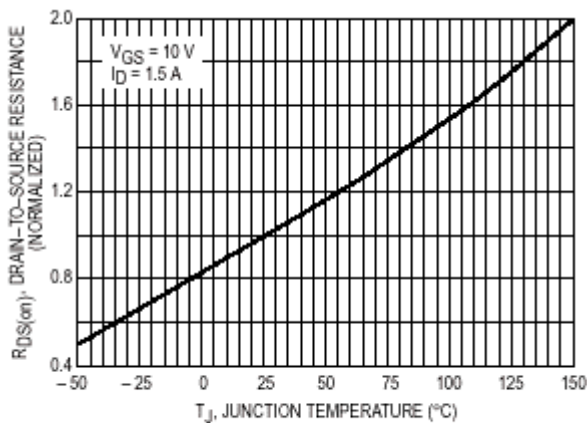


Figure 5. On-Resistance Variation with Temperature


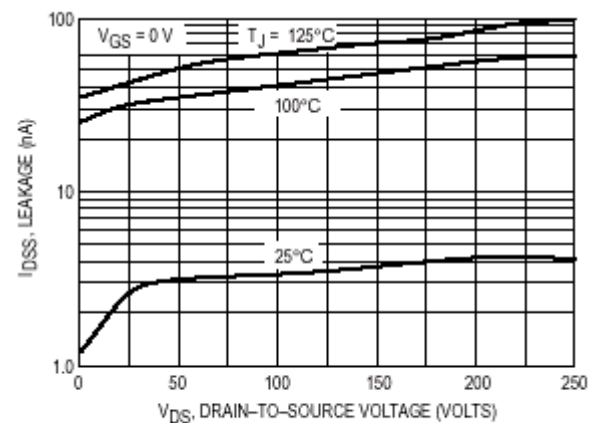


Figure 6. Drain-To-Source Leakage Current versus Voltage

TO-252-2L PACKAGE OUTLINE DIMENSIONS

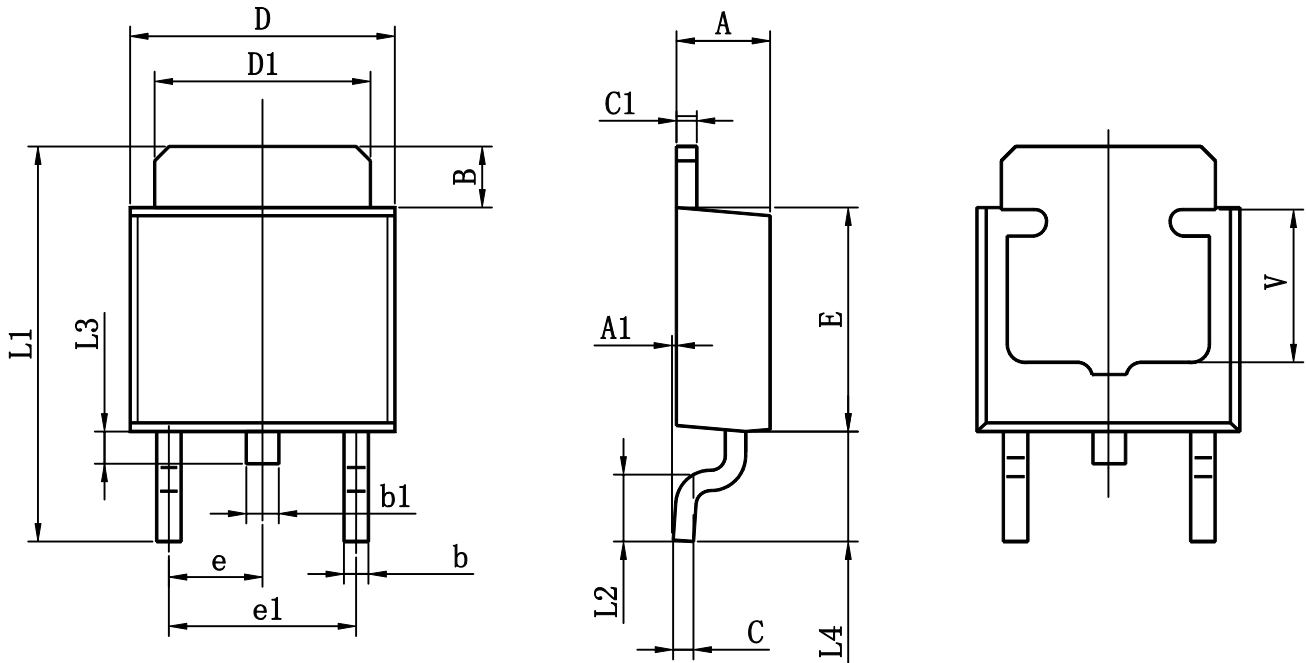

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
B	1.350	1.650	0.053	0.065
b	0.500	0.700	0.020	0.028
b1	0.700	0.900	0.028	0.035
c	0.430	0.580	0.017	0.023
c1	0.430	0.580	0.017	0.023
D	6.350	6.650	0.250	0.262
D1	5.200	5.400	0.205	0.213
E	5.400	5.700	0.213	0.224
e	2.300TYP		0.091TYP	
e1	4.500	4.700	0.177	0.185
L1	9.500	9.900	0.374	0.390
L2	1.400	1.780	0.055	0.070
L3	0.650	0.950	0.026	0.037
L4	2.550	2.900	0.100	0.114
V	3.80REF		0.150REF	