


T-41-81

LED-
Photoconductor
Isolators

The first in the series is the CLM400, which is an exact drop-in replacement electrically for the CLM6000 PHOTOMOD. The radial lead design eliminates costly lead cutting and forming operations now needed for PCB usage.

The second in the series is the CLM410 which has very low "on" resistance of 750 ohms @ 1 ma. drive versus the CLM6000 or CLM400 with 500 ohms @ 20 ma. drive. Both of the new 400 Series devices are now specified at 1 ma. drive currents.

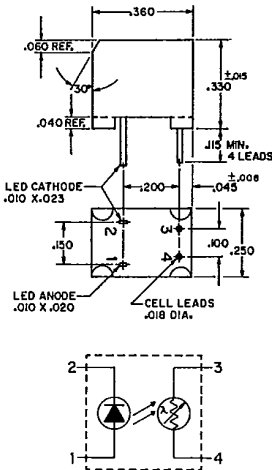



ELECTRICAL CHARACTERISTICS @25°C
TECHNICAL DATA

Led	Characteristics	Test Conditions	Min.	CLM400 Typ.	Max.	Min.	CLM410 Type.	Max.	Units
I _F MAX	Maximum forward current				40			40	mA
V _F	Forward voltage	I _F = 20 mA			2.0			2.5	volts
I _R	Reverse current	V _R = 4V			100			100	μA
PHOTOCELL V _{MAX}	Cell voltage				60			60	volts DC or PAC
P ①	Power dissipation	25°C			50			50	milliwatts
PHOTOMOD ② R _{ON}	On resistance	I _F = 1 mA I _F = 20 mA			5K 500			750	ohms ohms
R _{OFF}	Off resistance	10 sec. after I _F → 0 4 VDC on cell	500K			500K			ohms
t _R ①	Rise time	Time to 63% of final condition at I _F = 40		3.5			3.5		milliseconds
t _D ①	Decay time	Time to 100K			500			500	milliseconds
V _{BD}	Isolation		2000			2000			volts DC or PAC
dRc/dt	Cell temperature coefficient	I _F = 1 mA - 40 to 70°C		3			2		%/°C
C _{IN/OUT}	Input-Output capacitance	V = 0V f = 1MHZ		.65			.65		pf

8

Temperature Storage — 40°C to 75°C Absolute Maximum Ratings: Operating — Derate power to 0 at 75°C


T-41-81

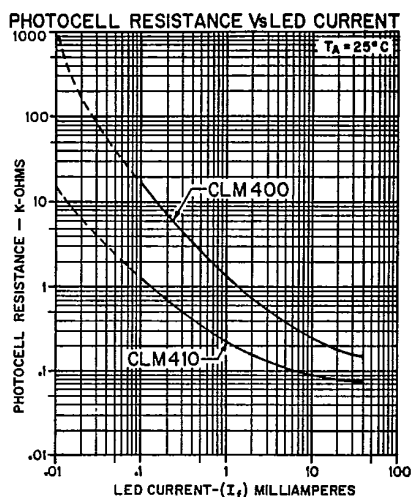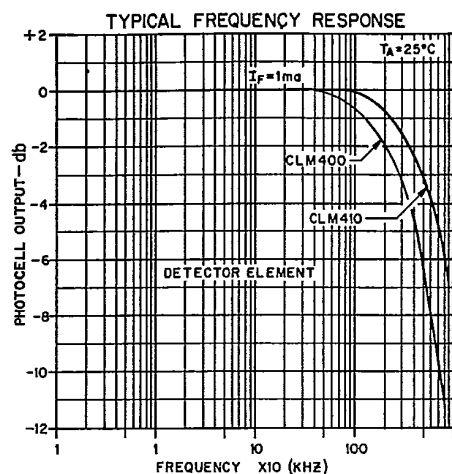

RESPONSE TIME

The t_{RISE} and t_{DECAY} curve is the response time of the module when the lamp current is instantaneously varied from either zero to rated lamp current (t_{RISE}) or rated lamp current to zero (t_{DECAY}).

These curves are representative characteristics. For specific specifications, please contact the factory.

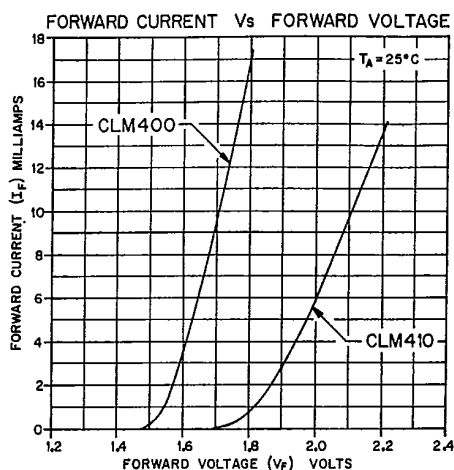

Notes:

- ① P.D. at 25°C case temperature. Derate linearly to 0 at 75°C. Allowable PHOTOMOD dissipation is determined by the photocell temperature which must not exceed 75°C for continuous operation.
- ② After 24 hours on.
- ③ Rise time measured after 24 hours on + 5 seconds off.
- ④ Decay time measured from 24 hours on.