


CR 12 NR

Features

Solid State Ceramic Chip
Surface Mounting Device
High Power Thermal Absorption
Superior Light Uniformity Over 180°
End to End Side to Side Stackable Down to a Pitch of 1,33mm
Solder Pads Conform to Mil-Std 883B
Normal Red LED
Red Diffused Lens

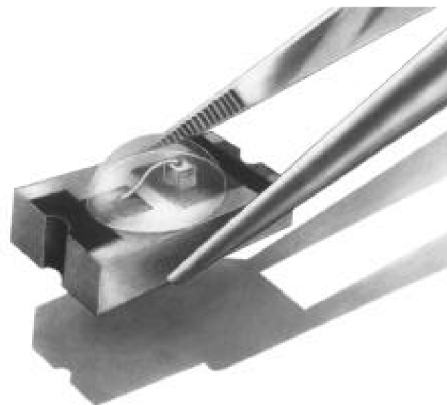


Applications

Ideal For Back Light Applications
Custom Configurations
Standard Applications

Maximum Ratings (Ta=25°C)



Characteristic	Symbol	Max.	Unit
Forward Current	I _F	75	mA
Reverse Voltage	V _R	70	V
Power Dissipation	P _D	130.00	mW
Operating Temperature	T _{opr}	-25 ~ +80	°C
Storage Temperature	T _{stg}	-25 ~ +120	°C
Soldering Temperature	T _{sol}	250	°C
Soldering Time	–	for 10 sec. max	–

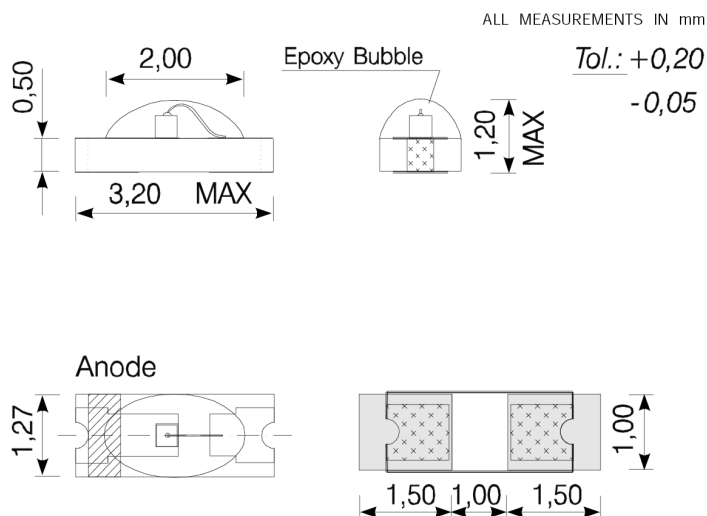



Opto-Electrical Characteristics (Ta=25°C)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Forward Voltage	V _F	I _F =20mA	–	2.10	2.40	V
Reverse Current	I _R	V _R =5V	–	–	100	μA
Luminous Intensity	I _v	I _F =20mA	2.20	5.60	–	mcd
Viewing Angle	2θ ^{1/2}	–	–	180°	–	deg.
Peak Wavelength	λ _p	I _F =20mA	–	660	–	nm
Dominant Wavelength	λ _d	I _F =20mA	–	643	–	nm
Spectral Line Half Width	Δλ	I _F =20mA	–	35	–	nm

CR 12 NR Graphs

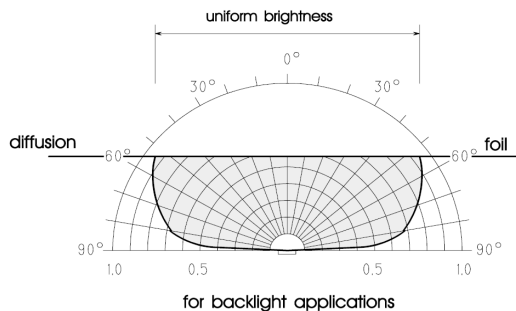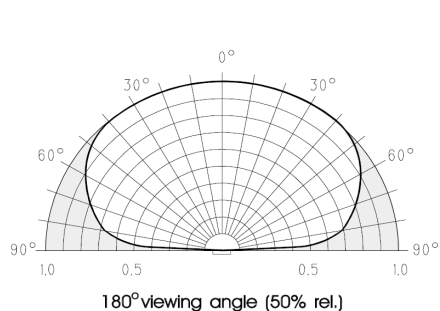


SUGGESTED MOUNTING METHOD

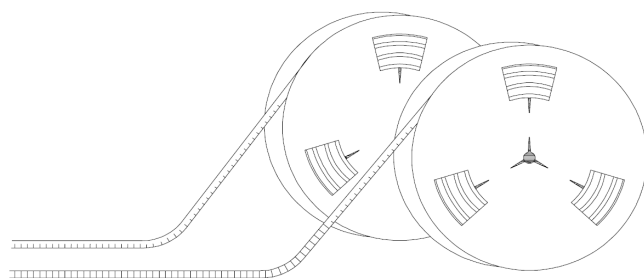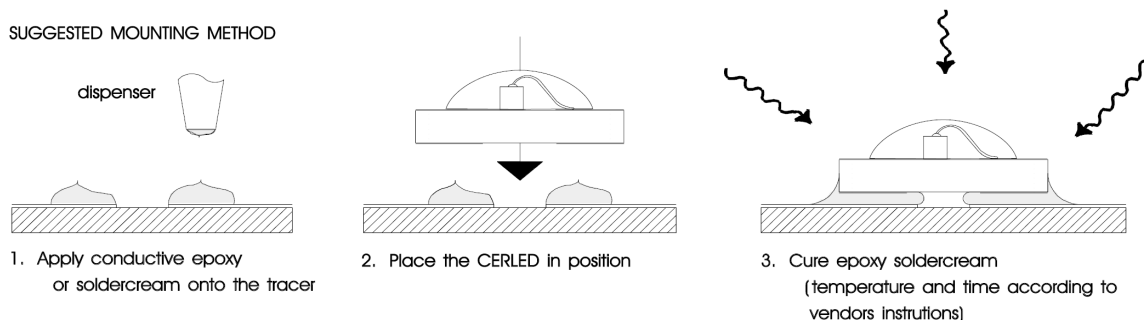

Special Packing:
standard 8mm blister tape

ARRAYS



code to order strips:
CR 10 XX -__10
No of LEDs

Available in strips up to 12 CERLEDs with a max. pitch tolerance in spacing and linearity of $\pm 0,01$ mm between chip centers.

Company Headquarters
120 Broadway
Menands, New York 12204
Toll Free: 800.984.5337
Fax: 518.432.7454

marktech
optoelectronics

Web: www.marktechopto.com | Email: info@marktechopto.com

West Coast Sales Office
950 South Coast Drive, Suite 265
Costa Mesa, California 92626
Toll Free: 800.984.5337
Fax: 714.850.9314