


EL 1601A

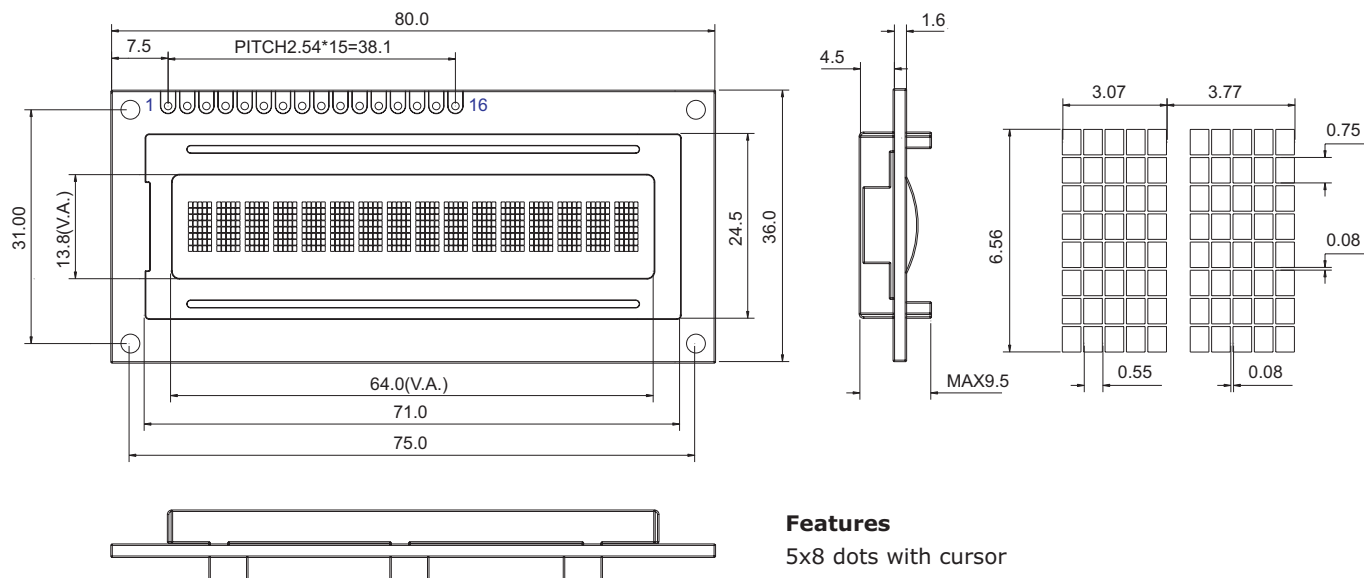

Features

- 5x8 dots with cursor
- Built-in controller
- 1/16 duty cycle
- BKL to be driven by pin 1,2 or 15,16 or A,K

Interface Pin Connection

Pin	Signal	Pin	Signal
1	VSS	9	DB2
2	VDD	10	DB3
3	V0	11	DB4
4	RS	12	DB5
5	R/W	13	DB6
6	E	14	DB7
7	DB0	15	A
8	DB1	16	K

Mechanical Data

Item	Standard	Unit
Module dimension	80.0 x 36.0	mm
Viewing Area	64 x 13.8	mm
Dot Size	0.55 x 0.75	mm
Character size	3.07 x 6.56	mm

Absolute Maximum Rating

Item	Symbol	Min.	Standard Typ.	Max.	Unit
Power supply	VDD-VSS	-0.3	--	5.5	V
Input voltage	VI	-0.3	--	VDD	V

Electronical characteristic

Item	Symbol	Condition	Min.	Standard Typ.	Max.	Unit
Input voltage	VDD	+5V	4.7	5.0	5.5	V
		+3.3V	2.7	3.0	5.3	V
Supply current	Idd	VDD=5V	--	2	4	mA
Recomended LCD driving voltage for normal temp	VDD-V0	-20°C	--	--	--	V
		0°C	4.7	5.0	5.5	V
		25°C	4.3	4.5	4.7	V
		50°C	4.1	4.3	4.5	V
		70°C	--	--	--	V
LED forward voltage	VF	25°C	--	4.2	4.6	V
LED forward current	IF	25°C	--	110	--	mA
EL power supply current	Iel	Vel=110V AC 400Hz	--	--	--	mA

Display character address code:

Display position	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16
DDRAM address	00 01 02 03 04 05 06 07 40 41 41 ----- 47H