

EXAMINED BY :	EMERGING DISPLAY TECHNOLOGIES CORPORATION	FILE NO . CAS-10420
Kevin kuo		ISSUE : SEP.07,2005
APPROVED BY:		TOTAL PAGE : 8
Eric Lee		VERSION : 1

CUSTOMER	ACCEPTANCE	SPECIFICATIONS
----------	------------	----------------

MODEL :

162G0(WHITE LED TYPES)
(RoHS)

FOR MESSRS :

CUSTOMER'S APPROVAL

DATE :

BY :

EMERGING DISPLAY
TECHNOLOGIES CORPORATION

MODEL NO.	VERSION	PAGE
162G0(WHITE LED TYPES)(RoHS)	1	0-1

RECORDS OF REVISION

DOC . FIRST ISSUE
SEP.07,2005

DATE	REVISED PAGE NO.	SUMMARY

NUMBERING SYSTEM

Polarizer Mode	Backlight	Code value
Transflective	LED	L
Transmissive	LED	M

Backlight Color	Code Value
WHITE	W

E W 1 6 2 G 0 B M W

LCD type+ LCD color	Code Value
STN+Blue	B
FSTN+BLACK	N
STN+Y-G	Y
STN+Gray	G
FSTN+White	F

TABLE OF CONTENTS

NO.	ITEM	PAGE
1.	GENERAL SPECIFICATIONS -----	1
2.	MECHANICAL SPECIFICATIONS -----	1
3.	ABSOLUTE MAXIMUM RATINGS -----	2
4.	ELECTRICAL CHARACTERISTICS -----	3
5.	OPTICAL CHARACTERISTICS -----	4
6.	OUTLINE DIMENSIONS -----	5
7.	DETAIL DRAWING OF DOT MATRIX -----	6
8.	BLOCK DIAGRAM -----	6
9.	INTERFACE SIGNALS -----	7
10.	POWER SUPPLY -----	8
11.	DISPLAY DATA RAM ADDRESS -----	8

1. GENERAL SPECIFICATIONS

1.1 GENERAL SPECIFICATIONS

PLEASE REFER TO :

CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS :

E U - 0 0 2 B

1.2 APPLICATION NOTES FOR CONTROLLER / DRIVER :

PLEASE REFER TO :

CUSTOMER ACCEPTANCE STANDARD SPECIFICATIONS :

E U - K S 0 0 6 6

1.3 THIS INDIVIDUAL SPECIFICATIONS IS PRIOR TO GENERAL SPECIFICATIONS .

1.4 MATERIAL SAFETY DESCRIPTION

ASSEMBLIES SHALL COMPLY WITH EUROPEAN ROHS REQUIREMENTS, INCLUDING PROHIBITED MATERIALS/COMPONENTS CONTAINING LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, POLYBROMINATED BIPHENYLS (PBB) AND POLYBROMINATED DIPHENYL ETHERS (PBDE)

2. MECHANICAL SPECIFICATIONS

- (1) NUMBER OF CHARACTER ----- 16 CH * 2 LINES
- (2) MODULE SIZE ----- 80.0W * 36.0H * 13.0D (max.) mm
- (3) EFFECTIVE AREA ----- 66.0W * 16H mm
- (4) CHARACTER FONT ----- 5 * 7 DOTS + CURSOR
- (5) CHARACTER SIZE ----- 2.96W * 5.56H mm
- (6) CHARACTER PITCH ----- 3.55W * 5.94H mm
- (7) DOT SIZE ----- 0.56W * 0.66H mm
- (8) DOT PITCH ----- 0.60W * 0.70H mm
- (9) LCD TYPE *
- (10) DRIVING METHOD ----- 1 / 16 DUTY MULTIPLEX DRIVE
- (11) VIEWING DIRECTION ----- 6 O'CLOCK
- (12) BACK-LIGHT ----- LED ; COLOR : WHITE

* PLEASE REFER TO NUMBERING SYSTEM

3. ABSOLUTE MAXIMUM RATINGS

3.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	MIN.	MAX.	UNIT	REMARK
POWER SUPPLY FOR LOGIC	VDD – VSS	0	7.0	V	
POWER SUPPLY FOR LCD DRIVE	VDD – VO	0	13.0	V	
INPUT VOLTAGE	VI	VSS	VDD	V	
STATIC ELECTRICITY	—	—	100	V	NOTE (1)
LED POWER DISSIPATION	PD	—	0.2	W	
LED FORWARD CURRENT	IF	—	50	mA	
LED REVERSE VOLTAGE	VR	—	5	V	

NOTE (1) : TEST METHOD AND CONDITIONS :
AFTER CHARGING UP 200 pF CAPACITOR BY STATED VOLTAGE ,
THE CAPACITOR IS CONNECTED WITH INTERFACE PINS OF THE
MODULE .

3.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS.

I T E M	OPERATING		STORAGE		REMARK
	MIN.	MAX.	MIN.	MAX.	
AMBIENT TEMPERATURE	- 2 0°C	7 0 °C	- 3 0 °C	8 0 °C	NOTE (1), (3)
HUMIDITY	NOTE (2)		NOTE (2)		WITHOUT CONDENSATION
VIBRATION	—	4 . 9 m /s ² (0 . 5 G)	—	1 9 . 6 m /s ² (2 G)	
SHOCK	—	2 9 . 4 m /s ² (3 G)	—	4 9 0 . 0 m /s ² (5 0 G)	XYZ DIRECTIONS
CORROSIVE GAS	NOT ACCEPTABLE		NOT ACCEPTABLE		

NOTE (1) : BACKGROUND COLOR CHANGES SLIGHTLY DEPENDING ON AMBIENT
TEMPERATURE THIS PHENOMENON IS REVERSIBLE.

NOTE (2) : Ta ≤ 60°C : 90%RH (96HR MAX.)

Ta > 60°C : ABSOLUTE HUMIDITY MUST BE

LOWER THAN THE HUMIDITY OF 90%RH AT 60°C(96HR MAX.)

NOTE (3) : Ta AT -30°C: WILL BE < 48hrs

80°C: WILL BE < 168hrs

4. ELECTRICAL CHARACTERISTICS

Ta = 25 °C

VDD = 5.0 ±0.25 V

PARAMETER	SYMBOL	CONDITION	MIN .	TYP .	MAX .	UNIT
POWER SUPPLY VOLTAGE FOR LOGIC	VDD	—	4.75	5.0	5.25	V
H LEVEL INPUT VOLTAGE	VIH	—	2 . 2	—	—	V
L LEVEL INPUT VOLTAGE	VIL	—	—	—	0 . 6	V
H LEVEL OUTPUT VOLTAGE	VOH	−IOH = 0 . 2 mA	2 . 4	—	—	V
L LEVEL OUTPUT VOLTAGE	VOL	IOL = 1 . 2 mA	—	—	0 . 4	V
POWER SUPPLY CURRENT (LOGIC)	IDD	VDD = 5 . 0 V	—	1 . 0	3 . 0	mA
RECOMMENDED LCD DRIVING VOLTAGE	VDD − VO θy= 10°, θx= 0° DUTY= 1/16	Ta = - 20 °C	3.9	4.4	4.9	V
		Ta = 25 °C	3.9	4.4	4.9	V
		Ta = 70 °C	3.9	4.4	4.9	V
CLOCK OSCILLATION FREQUENCY	FOSC	Ta = 25 °C	—	270	—	KHz
LED FORWARD VOLTAGE	VF	IF=20mA	—	3.6	4	V
LED FORWARD CURRENT	IF	—	—	20	50	mA
LED REVERSE CURRENT	IR	VR=5V	—	—	0 . 2	mA

5. OPTICAL CHARACTERISTICS .

Ta = 25 °C

VDD = 5.0 ±0.25V

I T E M	SYMBOL		CONDITION		MIN .	TYP .	MAX .	UNIT	NOTE
VIEWING ANGLE	θy+		K *	θx=0°	(53)	(58)	—	d e g .	1
	θy-				(43)	(48)	—		
	θx+			θy=0°	(60)	(65)	—		
	θx-				(60)	(65)	—		
CONTRAST RATIO	K	STN	θy- = 10 ° , θx = 0°		2.0	3.0	—	d e g .	1
		FSTN			3.5	5.3	—		
RESPONSE TIME	tr (rise)		θx = 0° θy- = 10°	Ta = -20°C	—	5538	7199	ms	1
				Ta = 25°C	—	228	296		
				Ta = 70°C	—	104	135		
	tf (fall)			Ta = -20°C	—	2316	3011		
				Ta = 25°C	—	174	226		
				Ta = 70°C	—	85	111		
THE BRIGHTNESS OF MODULE	L		IF=20.0mA		9	12	—	cd/m²	1 , 2
					6	8	—		1 , 3

K* = STN : K ≥ 1.5

FSTN : K ≥ 2.0


NOTE (1) : PLEASE REFER TO :

CUSTOMER ACCEPTANCE STANDARD SPECIFICATION : EU-002B

NOTE (2) : POLARIZER MODE : TRANSMISSIVE

NOTE (3) : POLARIZER MODE : TRANSFLECTIVE

8. BLOCK DIAGRAM

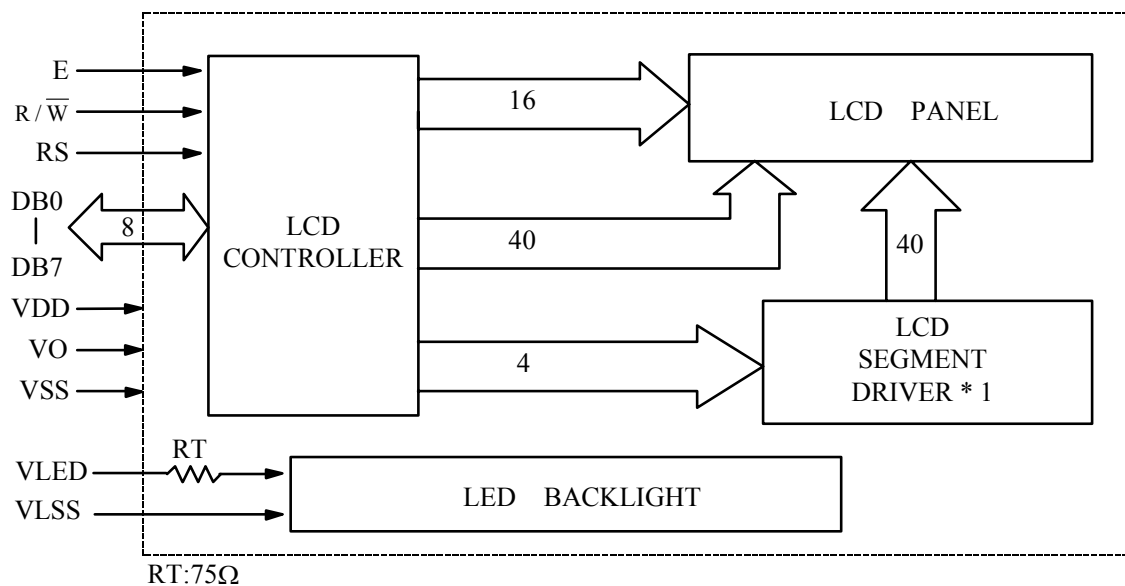


9. INTERFACE SIGNALS

PIN NO.	SYMBOL	DESCRIPTION	FUNCTION
1	VSS	GROUND	0V (GND)
2	VDD	POWER SUPPLY FOR LOGIC CIRCUIT	+5V
3	VO	LCD CONTRAST ADJUSTMENT	
4	RS	INSTRUCTION/DATA REGISTER SELECTION	RS = 0 : INSTRUCTION REGISTER RS = 1 : DATA REGISTER
5	R / \overline{W}	READ/WRITE SELECTION	R / \overline{W} = 0 : REGISTER WRITE R / \overline{W} = 1 : REGISTER READ
6	E	ENABLE INPUT	
7	DB0	DATA INPUT/OUTPUT LINES	4 BIT/8BIT SELECTABLE 4 BIT : DB4 - DB7 8 BIT : DB0 - DB7
8	DB1		
9	DB2		
10	DB3		
11	DB4		
12	DB5		
13	DB6		
14	DB7		
15	VLED	POWER SUPPLY FOR LED BACKLIGHT (ANODE)	—
16	VLSS	POWER SUPPLY FOR LED BACKLIGHT (CATHODE)	0V(GND)


1 0 . POWER SUPPLY

1 0 . 1 POWER SUPPLY FOR LCD MODULE

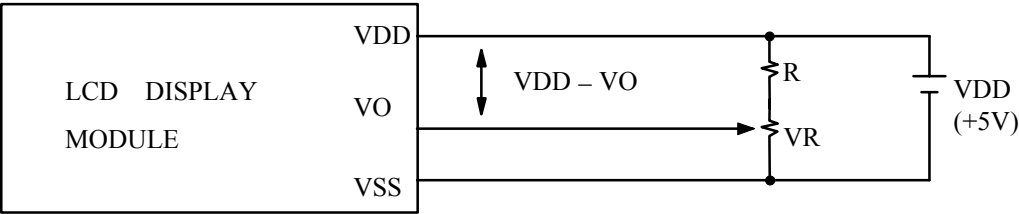

VDD – VO : LCD DRIVING VOLTAGE
 VR : 10KΩ~20KΩ
 RECOMMENDED RESISTOR R : VDD – VO ≥ 1.5 V

1 0 . 2 POWER SUPPLY FOR LED BACKLIGHT

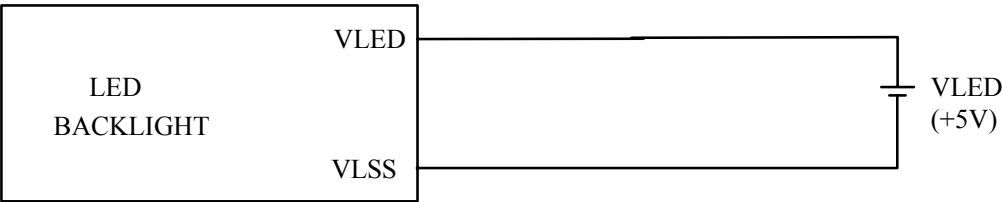

1 1 . DISPLAY DATA RAM ADDRESS

CHARACTER	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
LINE 1	80	81	82	83	84	85	86	87	88	89	8A	8B	8C	8D	8E	8F
LINE 2	C0	C1	C2	C3	C4	C5	C6	C7	C8	C9	CA	CB	CC	CD	CE	CF