

LA-8048, LA-8049 **Monolithic Log Amplifier** **Monolithic Antilog Amplifier**

FEATURES


- 1/2% Full Scale Accuracy
- Temperature Compensated 0°C to 70°C
- Scale Factor 1V/Decade, Adjustable
- 120dB Dynamic Current Range (8048)
- 60dB Dynamic Voltage Range (8048 & 8049)
- Dual FET-Input Op-Amps

GENERAL DESCRIPTION


The 8048 is a monolithic logarithmic amplifier capable of handling six decades of current input, or three decades of voltage input. It is fully temperature compensated and is nominally designed to provide 1 volt of output for each decade change of input. For increased flexibility, the scale factor, reference current and offset voltage are externally adjustable.

The 8049 is the antilogarithmic counterpart of the 8048; it nominally generates one decade of output voltage for each 1 volt change at the input.


8048 SCHEMATIC DIAGRAM

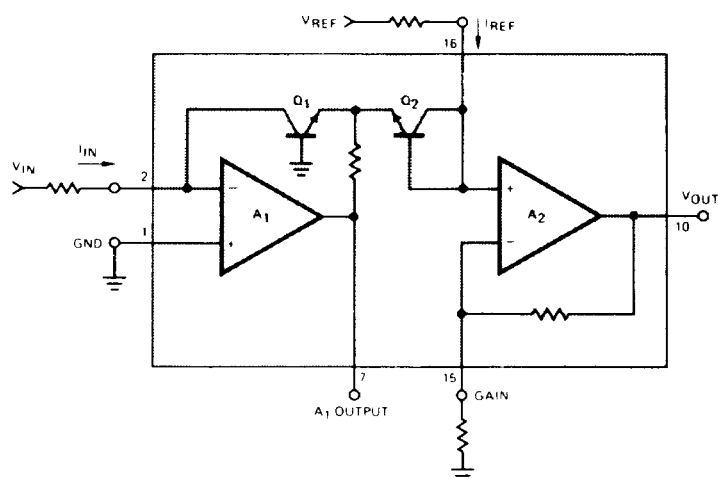


CONNECTION DIAGRAM

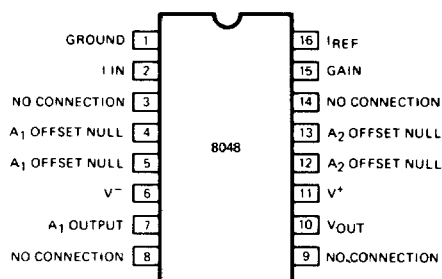

8049 SCHEMATIC DIAGRAM

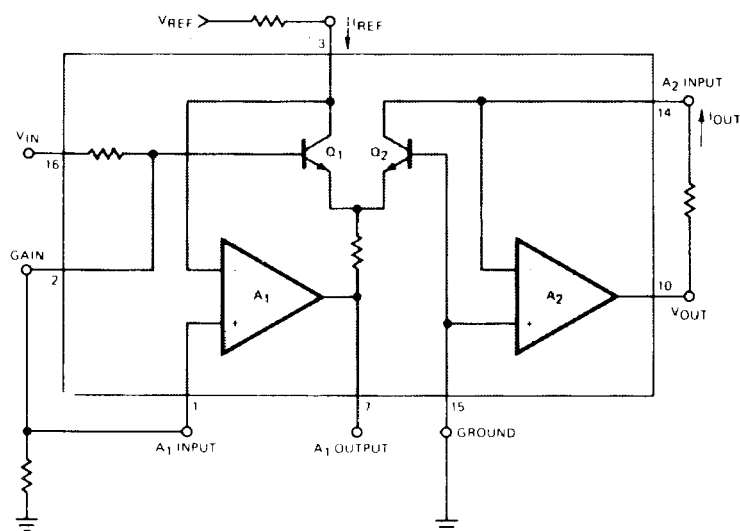

CONNECTION DIAGRAM

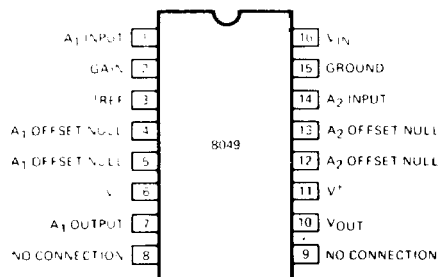

LA-8048, LA-8049

MAXIMUM RATINGS


Supply Voltage	±18 V	Operating Temperature Range	0°C to +70°C
I_{IN} (Input Current)	2 mA	Output Short Circuit Duration	Indefinite
I_{REF} (Reference Current)	2 mA	Storage Temperature Range	-65°C to +125°C
Voltage between Offset Null and V^+	±0.5 V	Lead Temperature (Soldering, 60 sec.)	300°C
Power Dissipation	750 mW		

ELECTRICAL CHARACTERISTIC (Note 1)


PARAMETER	CONDITION	LA-8048-B			LA-8048-C			UNITS
		MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
Dynamic Range								
I_{IN} (1 nA–1 mA)		120			120			dB
V_{IN} (10 mV–10 V)		60			60			dB
Error, % of Full Scale	$R_{IN} = 10 \text{ k}\Omega$ $T_A = 25^\circ\text{C}$, $I_{IN} = 1 \text{ nA}$ to 1 mA		.20	0.5		.25	1.0	%
Error, % of Full Scale	$T_A = 0^\circ\text{C}$ to $+70^\circ\text{C}$, $I_{IN} = 1 \text{ nA}$ to 1 mA		.60	1.25		.80	2.5	%
Error, Absolute Value	$T_A = 25^\circ\text{C}$, $I_{IN} = 1 \text{ nA}$ to 1 mA		12	30		14	60	mV
Error, Absolute Value	$T_A = 0^\circ\text{C}$ to $+70^\circ\text{C}$, $I_{IN} = 1 \text{ nA}$ to 1 mA		36	75		50	150	mV
Temperature Coefficient of V_{OUT}	$I_{IN} = 1 \text{ nA}$ to 1 mA		0.8			0.8		mV/°C
Power Supply Rejection Ratio	Referred to Output		2.5			2.5		mV/V
Offset Voltage (A_1 & A_2)	Before Nulling		15	25		15	50	mV
Wideband Noise	At Output, for $I_{IN} = 100 \mu\text{A}$		250			250		μV (RMS)
Output Voltage Swing	$R_L = 10 \text{ k}\Omega$	±12	±14		±12	±14		V
	$R_L = 2 \text{ k}\Omega$	±10	±13		±10	±13		V
Power Consumption			150	200		150	200	mW
Supply Current			5	6.7		5	6.7	mA

NOTE 1: Unless otherwise noted, specifications apply for $V_S = \pm 15 \text{ V}$, $T_A = 25^\circ\text{C}$, $I_{REF} = 1 \text{ mA}$, scale factor adjusted for 1V/decade. Accuracy specifications assume that offset voltages and scale factor have been adjusted using the procedure outlined on page 3.


TRANSFER FUNCTION
FOR CURRENT INPUTS




TRANSFER FUNCTION FOR
VOLTAGE INPUTS




SMALL SIGNAL BANDWIDTH
AS A FUNCTION OF INPUT
CURRENT

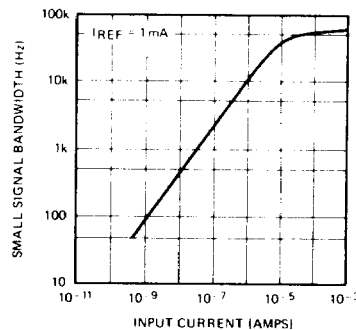


MAXIMUM ERROR VOLTAGE
AT THE OUTPUT AS A
FUNCTION OF INPUT CURRENT

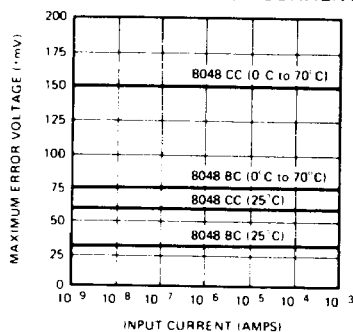

MAXIMUM ERROR VOLTAGE
AT THE OUTPUT AS A
FUNCTION OF INPUT VOLTAGE

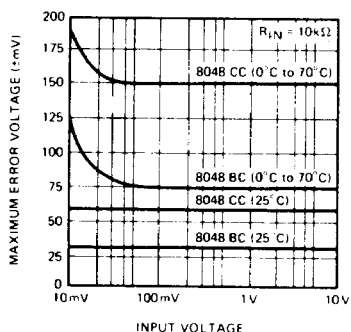

SMALL SIGNAL VOLTAGE GAIN
AS A FUNCTION OF INPUT
VOLTAGE FOR $R_S = 10 \text{ k}\Omega$



THEORY OF OPERATION

The 8049 relies on the same logarithmic properties of the transistor as the 8048. The input voltage forces a specific ΔV_{BE} between Q_1 and Q_2 (Fig. 2). This V_{BE} difference is converted into a difference of collector currents by the transistor pair. The equation governing the behavior of the transistor pair is derived from (2) on Page 3 and is as follows:

$$I_{C1}/I_{C2} = \exp \left[\frac{q \Delta V_{BE}}{kT} \right] \quad (5)$$

When numerical values for q/kT are put into this equation, it is found that a ΔV_{BE} of 59mV (at 25°C) is required to change the collector current ratio by a factor of ten. But for ease of application, it is desirable that a 1 volt change at the input generate a tenfold change at the output. The required input attenuation is achieved by the network comprising R_1 and R_2 . In order that scale factors other than one decade per volt may be selected, R_2 is external to the chip. It should have a value of 1k Ω , adjustable $\pm 20\%$, for one decade per volt. R_1 is a thin film resistor deposited on the monolithic chip; its temperature characteristics are chosen to compensate the temperature dependence of equation 5, as explained on Page 3.

The overall transfer function is as follows:

$$I_{OUT}/I_{REF} = \exp \left[\frac{-R_2}{(R_1 + R_2)} \times \frac{q V_{IN}}{kT} \right] \quad (6)$$

Substituting $V_{OUT} = I_{OUT} \times R_{OUT}$ gives:

$$V_{OUT} = R_{OUT} I_{REF} \exp \left[\frac{-R_2}{(R_1 + R_2)} \times \frac{q V_{IN}}{kT} \right] \quad (7)$$

For voltage references equation 7 becomes


$$V_{OUT} = V_{REF} \times \frac{R_{OUT}}{R_{REF}} \exp \left[\frac{-R_2}{(R_1 + R_2)} \times \frac{q V_{IN}}{kT} \right] \quad (8)$$

OFFSET AND SCALE FACTOR ADJUSTMENT

As with the log amplifier, the antilog amplifier requires three adjustments. The first step is to null out the offset voltage of A_2 . This is accomplished by reverse biasing the base-emitter of Q_2 . A_2 then operates as a unity gain buffer with a grounded input. The second step forces $V_{IN} = 0$; the output is adjusted for $V_{OUT} = 10V$. This step essentially "anchors" one point on the transfer function. The third step applies a specific input and adjusts the output to the correct voltage. This sets the scale factor. Referring to Fig. 2, the exact procedure for 1 decade/volt is as follows:

- 1) Connect the input (pin #16) to +15V. This reverse biases the base-emitter of Q_2 . Adjust R_7 for $V_{OUT} = 0V$. Disconnect the input from +15V.
- 2) Connect the input to Ground. Adjust R_4 for $V_{OUT} = 10V$. Disconnect the input from Ground.
- 3) Connect the input to a precise 2V supply and adjust R_2 for $V_{OUT} = 100mV$.

The procedure outlined above optimizes the performance over a 3 decade range at the output (i. e., V_{OUT} from 10mV to 10V). For a more limited range of output voltages, for example 1V to 10V, it would be better to use a precise 1 volt supply and adjust for $V_{OUT} = 1V$. For other scale factors and/or starting points, different values for R_2 and R_{REF} will be needed, but the same basic procedure applies.

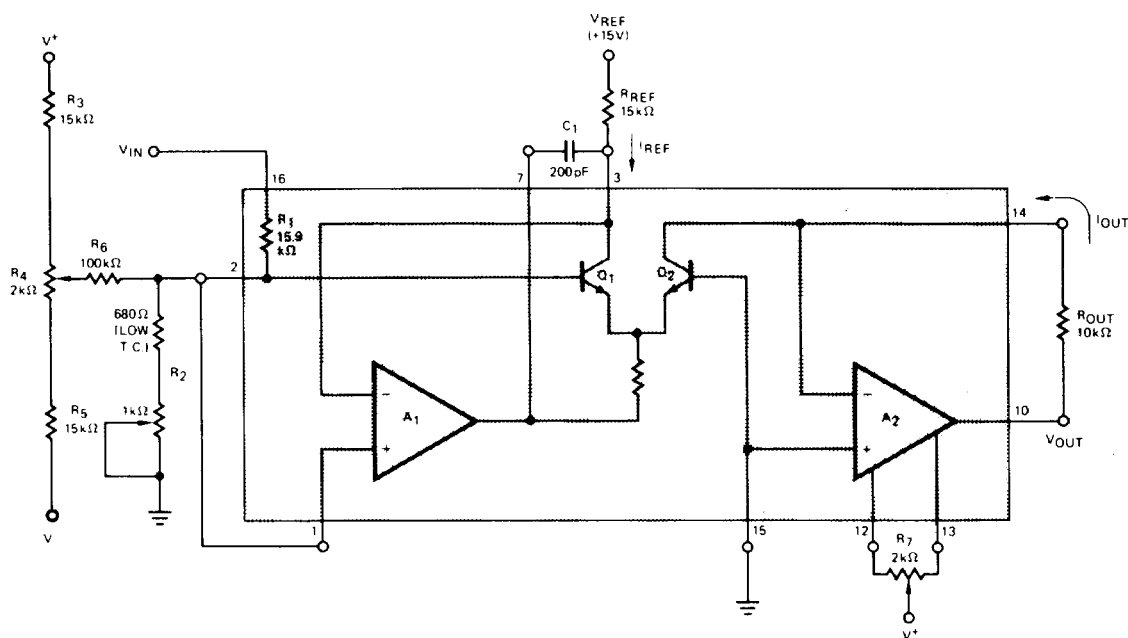

8049
FIGURE 2

LA-8048, LA-8049

MAXIMUM RATINGS

Supply Voltage
 V_{in} (Input Voltage)
 I_{ref} (Reference Current)
 Voltage between Offset Null and V^+
 Power Dissipation
 Operating Temperature Range
 Output Short Circuit Duration
 Storage Temperature Range
 Lead Temperature (Soldering, 60 sec.)


$\pm 18V$
 $\pm 15V$
 2mA
 $\pm 0.5V$
 750mW
 $0^\circ C$ to $+70^\circ C$
 Indefinite
 $-65^\circ C$ to $+150^\circ C$
 $300^\circ C$

ELECTRICAL CHARACTERISTIC (Note 1)


PARAMETER	CONDITION	LA-8049-B			LA-8049-C			UNITS
		MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
Dynamic Range (V_{OUT})	$V_{OUT} = 10mV$ to $10V$	60			60			dB
Error, Absolute Value	$T_A = 25^\circ C$, $0V \leq V_{IN} \leq 3V$		3	10		5	25	mV
Error, Absolute Value	$T_A = 0^\circ C$ to $+70^\circ C$, $0V \leq V_{IN} \leq 3V$		20	75		30	150	mV
Temperature Coefficient, Referred to V_{IN}	$V_{IN} = 3V$		0.38			0.55		mV/ $^\circ C$
Power Supply Rejection Ratio	Referred to Input, for $V_{IN} = 0V$		2.0			2.0		$\mu V/V$
Offset Voltage (A_1 & A_2)	Before Nulling		15	25		15	50	mV
Wideband Noise	Referred to Input, for $V_{IN} = 0V$		26			26		μV (RMS)
Output Voltage Swing	$R_L = 10k\Omega$	± 12	± 14		± 12	± 14		V
	$R_L = 2k\Omega$	± 10	± 13		± 10	± 13		V
Power Consumption			150	200		150	200	mW
Supply Current			5	6.7		5	6.7	mA

NOTE 1: Unless otherwise noted, specifications apply for $V_S = \pm 15V$, $T_A = 25^\circ C$, $I_{REF} = 1mA$, scale factor adjusted for 1 decade (out) per volt (in). Accuracy specifications assume that offset voltages and scale factor have been adjusted using the procedure on page 5.


TRANSFER FUNCTION
 (V_{OUT} AS A FUNCTION OF V_{IN})




SMALL SIGNAL BANDWIDTH
 AS A FUNCTION OF
 INPUT VOLTAGE



MAXIMUM ERROR VOLTAGE
 REFERRED TO THE INPUT AS A
 FUNCTION OF V_{IN}



SMALL SIGNAL VOLTAGE GAIN
 AS A FUNCTION OF
 INPUT VOLTAGE



APPLICATIONS INFORMATION

Scale Factor Adjustment

The scale factor adjustment procedures outlined on Page 3 (8048) and Page 5 (8049) are primarily directed towards setting up 1 volt (ΔV_{OUT}) per decade (ΔI_{IN} or ΔV_{IN}) for the log amp, or one decade (ΔV_{OUT}) per volt (ΔV_{IN}) for the antilog amp.

This corresponds to $K = 1$ in the respective transfer functions:

$$\text{Log Amp: } V_{OUT} = -K \log_{10} \left[\frac{I_{IN}}{I_{REF}} \right] \quad (9)$$

$$\text{Antilog Amp: } V_{OUT} = R_{OUT} I_{REF} 10^{-V_{IN}/K} \quad (10)$$

By adjusting R_2 (Fig. 1 and Fig. 2) the scale factor "K" in equation 9 and 10 can be varied. The effect of changing K is shown graphically in Fig. 3 for the log amp, and Fig. 4 for the antilog amp. The nominal value of R_2 required to give a specific value of K can be determined from equation 11. It should be remembered that R_1 has a $\pm 20\%$ tolerance in absolute value, so that allowance shall be made for adjusting the nominal value of R_2 by $\pm 20\%$.

$$R_2 = \frac{941}{(K - .059)} \Omega \quad (11)$$

EFFECT OF VARYING "K" ON THE LOG AMPLIFIER

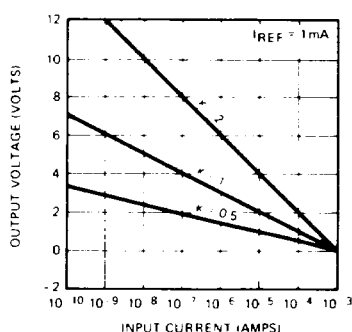


FIGURE 3

EFFECT OF VARYING "K" ON THE ANTILOG AMPLIFIER




FIGURE 4

Frequency Compensation

Although the op-amps in both the 8048 and the 8049 are compensated for unity gain, some additional frequency compensation is required. This is because the log transistors in the feedback loop add to the loop gain. In the 8048, 150 pF should be connected between Pins 2 and 7 (Fig. 1). In the 8049, 200 pF between Pins 3 and 7 is recommended (Fig. 2).

Error Analysis

Performing a meaningful error analysis of a circuit containing log and antilog amplifiers is more complex than dealing with a similar circuit involving only op-amps. In this data sheet every effort has been made to simplify the analysis task, without in any way compromising the validity of the resultant numbers.

The key difference in making error calculations in log/antilog amps, compared with op-amps, is that the gain of the former is a function of the input signal level. Thus, it is necessary, when referring errors from output to input, or vice versa, to check the input voltage level, then determine the gain of the circuit by referring to the graphs given on Pages 2 and 4.

The various error terms in the log amplifier, the 8048, are referred to the output (RTO) of the device. The error terms in the antilog amplifier, the 8049, are referred to the input (RTI) of the device. The errors are expressed in this way because in the majority of systems a number of log amps interface with an antilog amp, as shown in Fig. 5.

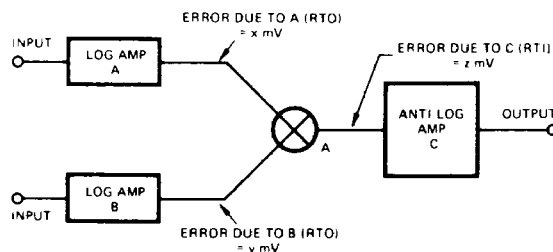


FIGURE 5

It is very straightforward to estimate the system error at node (A) by taking the square root of the sum-of-the-squares of the errors of each contributing block.

$$\text{Total Error} = \sqrt{x^2 + y^2 + z^2} \text{ at (A)}$$

If required, this error can be referred to the system output through the voltage gain of the antilog circuit, using the voltage gain plot on Page 4.

The numerical values of x , y , and z in the above equation are obtained from the maximum error voltage plots given on Pages 2 and 4. For example, with the 8048BC, the maximum error at the output is 30mV at 25°C. This means that the measured output will be within 30mV of the theoretical transfer function, provided the unit has been adjusted per the procedures on Page 3. Fig. 6 illustrates this point.

To determine the maximum error over the operating temperature range, the 0 to 70°C absolute error values given in the table of electrical characteristics should be used. For intermediate temperatures, assume a linear increase in the error between the 25°C value and the 70°C value.

For the antilog amplifier, the only difference is that the error refers to the input, i. e., the horizontal axis. It will be noticed that the maximum error voltage of the 8049, over the temperature range, is strongly dependent on the input voltage. This is because the output amplifier, A2, has an offset voltage drift which is directly transmitted to the output. When this error is referred to the input, it must be divided by the voltage gain, which is input voltage dependent. At $V_{IN} = 3V$, for example, errors at the output are multiplied by 1/0.23 (= 4.35) when referred to the input.

It is important to note that both the 8048 and the 8049 require positive values of I_{REF} , and the input and output currents (or voltages) respectively must also be positive. Application of negative I_{IN} to the 8048 or negative I_{REF} to

either circuit will cause malfunction, and if maintained for long periods, would lead to device degradation. Some protection can be provided by placing a diode between pin 7 and ground.

SETTING UP THE REFERENCE CURRENT

In both the 8048 and the 8049 the input current reference pin (I_{REF}) is not a true virtual ground. For the 8048, a fraction of the output voltage is seen on Pin 16 (Fig. 1). This does not constitute an appreciable error provided V_{REF} is much greater than this voltage. A 10V or 15V reference satisfies this condition. For the 8049, a fraction of the input voltage appears on Pin 3 (Fig. 2), placing a similar restraint on the value of V_{REF} .

Alternatively, I_{REF} can be provided from a true current source. One method of implementing such a current source is shown in Fig. 7.

LOG OF RATIO CIRCUIT, DIVISION

The 8048 may be used to generate the log of a ratio by modulating the I_{REF} input. The transfer function remains the same, as defined by equation 9:

$$V_{OUT} = -K \log_{10} \left[\frac{I_{IN}}{I_{REF}} \right] \quad (9)$$

Clearly it is possible to perform division using just one 8048, followed by an 8049. For multiplication, it is generally necessary to use two log amps, summing their outputs into an antilog amp.

To avoid the problems caused by the I_{REF} input not being a true virtual ground (discussed in the previous section), the circuit of Fig. 7 is again recommended if the I_{REF} input is to be modulated.

TRANSFER FUNCTION FOR CURRENT INPUTS

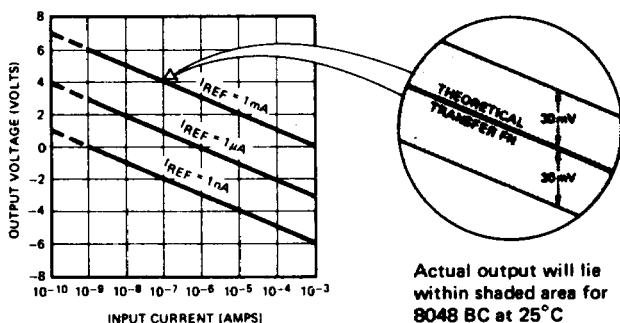


FIGURE 6

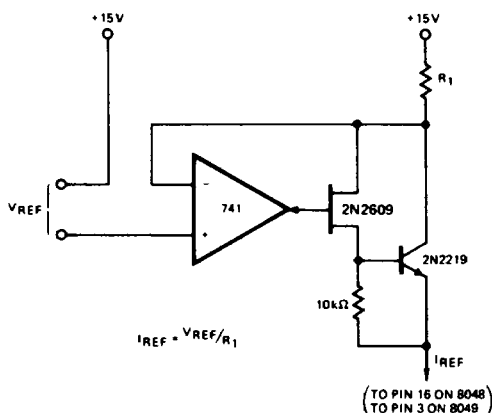


FIGURE 7

LA-8048, LA-8049

DEFINITION OF TERMS

In the definitions which follow, it will be noted that the various error terms are referred to the output of the log

DYNAMIC RANGE The dynamic range of the 8048 refers to the range of input voltages or currents over which the device is guaranteed to operate. For the 8049 the dynamic range refers to the range of output voltages over which the device is guaranteed to operate.

ERROR, ABSOLUTE VALUE The absolute error is a measure of the deviation from the theoretical transfer function, after performing the offset and scale factor adjustments as outlined on Pages 3 (8048) or 5 (8049). It is expressed in mV and referred to the linear axis of the transfer function plot. Thus, in the case of the 8048, it is a measure of the deviation from the theoretical output voltage for a given input current or voltage. For the 8049 it is a measure of the deviation from the theoretical input voltage required to generate a specific output voltage.

The absolute error specification is guaranteed over the dynamic range.

ERROR, % OF FULL SCALE The error as a percentage of full scale can be obtained from the following relationship:

$$\text{Error, \% of Full Scale} = \frac{100 \times \text{Error, absolute value}}{\text{Full Scale Output Voltage}}$$

amp, and to the input of the antilog amp. The reason for this is explained on Page 6.

TEMPERATURE COEFFICIENT OF V_{OUT} OR V_{IN} For the 8048 the temperature coefficient refers to the drift with temperature of V_{OUT} for a constant input current. For the 8049 it is the temperature drift of the input voltage required to hold a constant value of V_{OUT} .

POWER SUPPLY REJECTION RATIO The ratio of the voltage change in the linear axis of the transfer function (V_{OUT} for the 8048, V_{IN} for the 8049) to the change in the supply voltage, assuming that the log axis is held constant.

WIDEBAND NOISE For the 8048, this is the noise occurring at the output under the specified conditions. In the case of the 8049, the noise is referred to the input.

SCALE FACTOR For the log amp, the scale factor (K) is the voltage change at the output for a decade (i. e. 10:1) change at the input. For the antilog amp, the scale factor is the voltage change required at the input to cause a one decade change at the output. See equations 9 and 10.

ORDERING INFORMATION

LOGARITHMIC AMPLIFIER

MODEL	MAX. ERROR	OPER. TEMP RANGE	PACKAGE
LA-8048-BC	30mV	0 to +70°C	16 pin Plastic DIP
LA-8048-CC	60mV		

ANTI-LOGARITHMIC AMPLIFIER

MODEL	MAX. ERROR	OPER. TEMP RANGE	PACKAGE
LA-8049-BC	10mV	0 to +70°C	16 pin Plastic DIP
LA-8049-CC	25mV		

PACKAGE DIMENSIONS

16 PIN PLASTIC DIP

