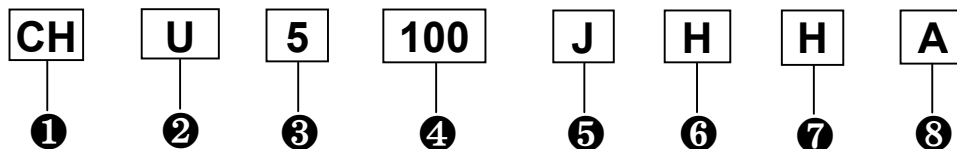


**HOW TO ORDER – PART NUMBER EXPLANATION**

To Order, please specify Pan Overseas Part No. as the following example :

**① Temperature Characteristics Code :**

	CH (NPO)	SL	B (Y5P)	E (Z5U)	F (Z5V)	X (X7R)	RY (Y5R)	FY (Y5V)
T.C.(PPM/ ) or Cap. Change %	0 ± 60PPM	+ 350 - 12000PPM	± 10%	+ 22% - 56%	+ 22% - 82%	± 15%	± 15%	+ 22% - 82%

**② Rated Voltage :**

	B	T	U	A	C	M	M2	M3
Voltage	16V	25V	50V	100V	500V	1000V	2000V	3000V

**③ Part Diameter(mm) :**

Code	Diameter	Code	Diameter	Code	Diameter	Code	Diameter
5	5mm	8	8mm	A	11mm	D	14mm
6	6mm	9	9mm	B	12mm	E	15mm
7	7mm	0	10mm	C	13mm	F	16mm

**④ Capacitance Code :**

Code	Capacitance (pF)	Code	Capacitance (pF)
010	1	102	1000
1R5	1.5	222	2200
100	10	472	4700
101	100	103	10000

**⑤ Tolerance Code :**

Code	Tolerance	Code	Tolerance
C	± 0.25pF	K	± 10%
D	± 0.50pF	M	± 20%
J	± 5%	Z	+ 80-20%

**⑥ Lead Configuration Code-Bulk & Taping Package**

Bulk Lead Code	Taping Lead Code	Configuration and Dimension			
		Kinked / Straight	Lead Space (F)	Lead Length (L)	Remarks
2		Straight	5.0mm	5±1mm	
5		Straight	2.5mm	25 mm Min.	
6	G or L	Straight	5.0mm	25mm Min.	G = Ammo, L = Reel
7		Straight	6.4mm	25mm Min.	
8		Inside Kinked	5.0mm	5±1mm	
9	H or R	Inside Kinked	5.0mm	25 mm Min.	H = Ammo, R = Reel
A		Straight	10.0mm	5±1mm	
B		Inside Kinked	10.0mm	5±1mm	
C		Straight	10.0mm	25 mm Min.	


**⑦ High temperature soldering type.****⑧ Epoxy coating material is used on 2KV & 3KV parts only.**

**CLASS I TEMPERATURE COMPENSATION TYPE****FEATURES :**

Capacitance has linear temperature coefficient

Capacitance high stability

Low lost at wide range of frequency

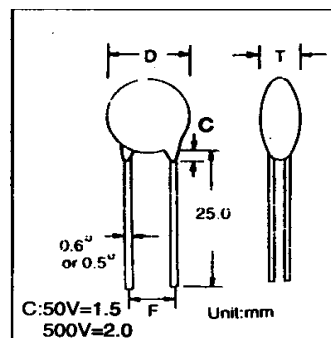**GENERAL SPECIFICATION**

Capacitance Range	1pF to 820pF
Capacitance Tolerance	$\pm 0.25\text{pF}$ , $\pm 0.5\text{pF}$ , $\pm 5\%$ , $\pm 10\%$
Operating Temperature Range	-25 ~ 85
Rated Working Voltage Rating	50, 500 VDC
Q Factor @ 1MHz, $1 \pm 0.2\text{Vrms}$ , 25	C 30 pF.....Q 1,000, C < 30 pF.....Q 400+20°C
Insulation Resistance (IR) @ 25	10,000 M Minimum
Dielectric Strength	3 times the rated WVDC
Testing Parameters	1MHz $\pm 20\%$ , 1.0Vrms $\pm 0.2\text{Vrms}$


**CAPACITANCE CHART :**

Temp. Char.	Part Dia.	Rated Voltage	Capacitance		Dim.(mm) Max.		
			Range (pF)	Tol.	D	T	F
CH 0±60 ppm/	5	U (50V)	0.5 - 47	C, D (≤ 10pF)	5.5	3.5	5.00
	6		51 - 75		6.5		
	7		82 - 100		7.5		
	8		120 - 150		8.5		
	10		180 - 270		10.5		
	12		300 - 390		12.5		
	5	C (500V)	0.5 - 36	J, K (>=10pF)	5.5	4.0	
	6		39 - 56		6.5		
	8		68 - 100		8.5		
	10		120 - 150		10.5		

Temp. Char.	Part Dia.	Rated Voltage	Capacitance		Dim.(mm) Max.		
			Range (pF)	Tol.	D	T	F
SL + 350 -1200 ppm/	5	U (50V)	10 - 120	J, K	5.5	3.5	5.00
	6		150 - 220		6.5		
	7		240 - 330		7.5		
	8		360 - 470		8.5		
	10		500 - 820		10.5		
	5	C (500V)	10 - 82		5.5	4.0	
	6		100 - 150		6.5		
	8		180 - 220		8.5		
	10		240 - 390		10.5		

- When Ordering, please use the Pan Overseas part number as indicated on page no. 13.

## TAPING SPECIFICATION AND DIMENSION

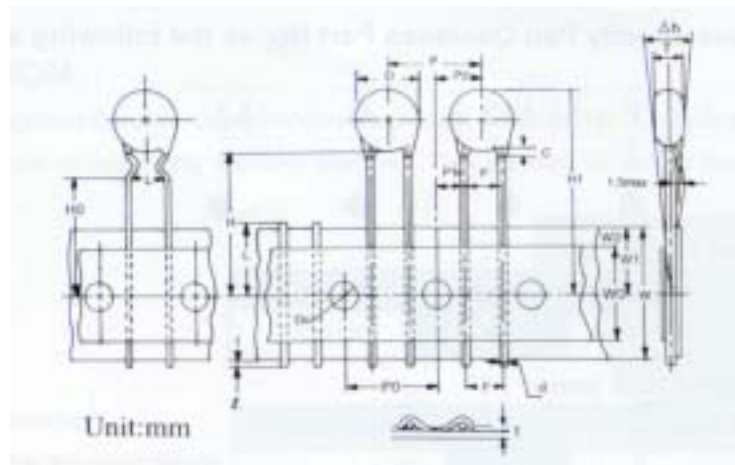

Item	Symbol	Specification		Remarks
		Value	Tolerance	
Body diameter	D	11.0	Max	
Body thickness	T	3.5	Max	
Lead-wire diameter	d	0.6	+0.06-0.05	
Pitch of component	P	12.7	±1.0	
Feed hole pitch	P <sub>0</sub>	12.7	±0.3	Cumulative pitch error : 1.0 mm/20 pitch
Feed hole center to lead	P <sub>1</sub>	3.85	±0.7	To be measured at bottom of clinch
Hole center to component center	P <sub>2</sub>	6.35	±1.3	
Lead-to lead distance	F	5.0	+0.8 -0.2	
Component alignment, F-R.	h	0	±2.0	
Tape width	W	18.0	+1.0 -0.5	
Hold-down tape width	W <sub>0</sub>	11.0	Min	
Hole position	W <sub>1</sub>	9.0	+0.75 -0.5	
Hold-down tape position	W <sub>2</sub>	3.0	Max	
Height of component form tape center	For Straight Lead Type	H	20.0	+1.0 -0.5
	For Kinked Lead Type	H <sub>0</sub>	16.0	±0.5
Component height	H <sub>1</sub>	32.25	Max	
Lead-wire protrusion	l	2.0	Max	
Feed hole diameter	D <sub>0</sub>	4.0	±0.3	
Total tape thickness	t	0.7	±0.2	
Length of snipped lead	L	11.0	Max	Ground paper : 0.5±0.1 mm
Coating rundown on leads	C	1.5	Max	

These radial taped ceramic disc capacitors are designed especially for automatic insertion, and is only available for those parts have diameter of 11.0mm or smaller.

