


A. Electrical specifications (@ 25 ° C)

- 1. Leakage Inductance;
25 μ H MAX
- 2. DC Resistance;
Primary (1-2) 2.5 Ω MAX
Secondary (3-4) 2.5 Ω MAX
Tertiary (5-6) 2.5 Ω MAX
- 3. Primary ET-constant;
90V- μ s MIN
- 4. Turns Ratio;
(1-2) : (3-4) : (5-6) = 1 : 1.00 : 1.00 \pm 5%
- 5. Interwinding Capacitance;
80.0 pF MAX
- 6. Primary Inductance;
1.0 mH MIN
- 7. Dielectric Strength;
AC 2600 Vrms 1 minute @ Pri to Sec


B. Marking;

STT-104, TAMURA, date code, and country of origin

C. Schematic diagram;

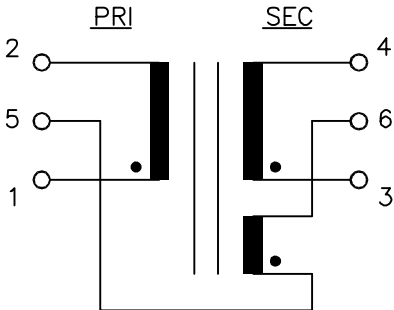


Country of origin



Date code

D. Mechanical Specifications

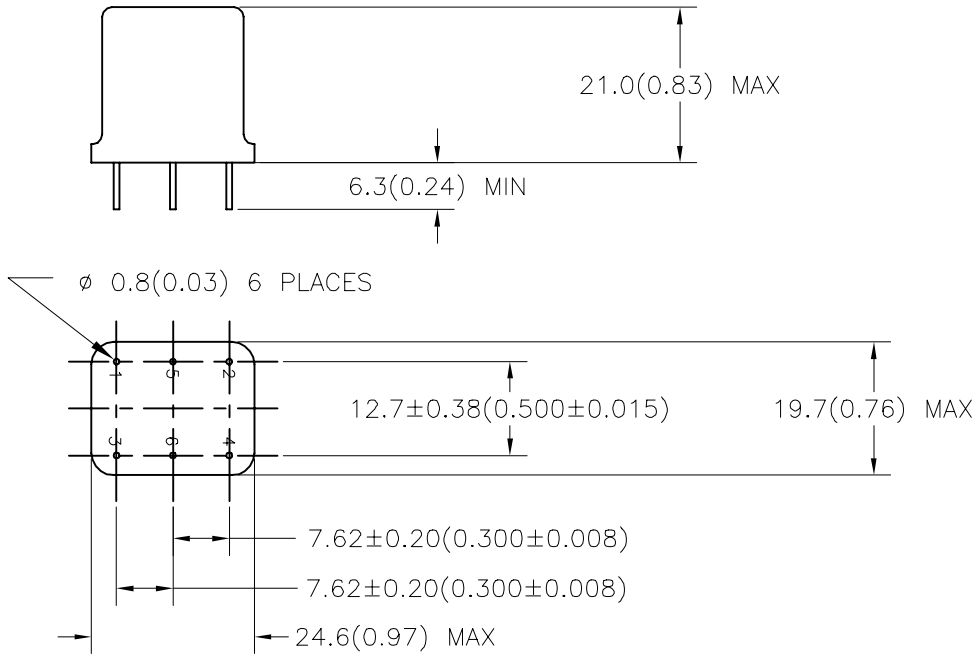

PREPARED BY:	DWG CONTROL NO.	REV	ENCAPSULATED TRIGGER TRANSFORMER	STT-104
K. Brennan	P-A1-11368	—		MODEL SPECIFICATION
ENGINEER:	ACAD\MXFMR\A1113681.DWG		TAMURA CORPORATION OF AMERICA	
T. Shiozawa	CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE		43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624 (909) 699-1270 FAX 9096769482	DIM: mm(In) SCL: NONE SH: 1 OF 1
APPROVED:	PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.			
V. Casey				