



1. Mechanical Dimensions:

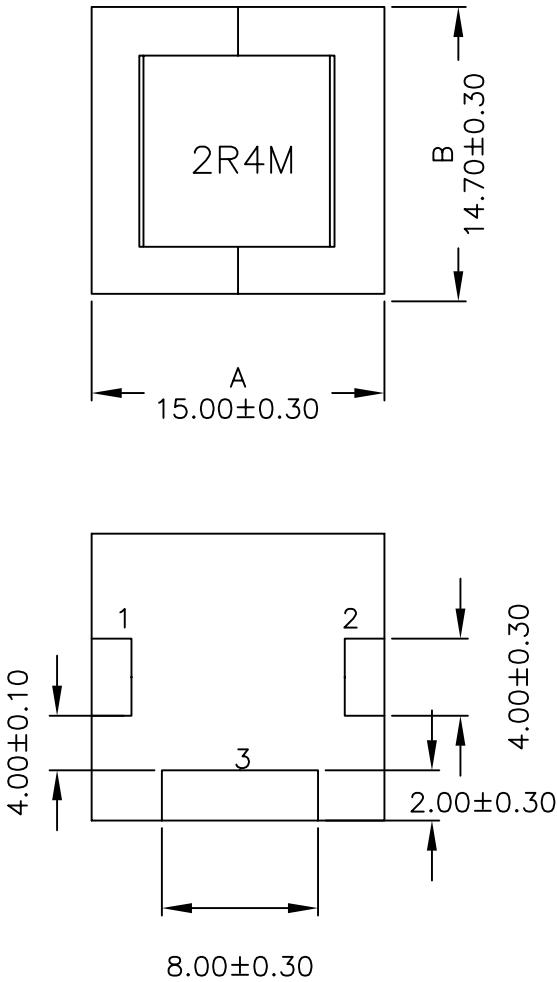

2. Schematic:



3. Electrical Specifications: @25°C

OCL: Pins 1,2-3 $2.40 \pm 20\%$ @100KHz 0.1V
Isat: 16.8Adc Max (Based on 10% drop in OCL)
DC Res.: 3.2mOhms Max

- Notes:
1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
 2. Flammability: UL94V-0
 3. ASTM oxygen index: > 28%
 4. Insulation System: Class F 155°C. UL file E151556
 5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
 6. Storage Temperature Range: -55°C to +125°C
 7. Aqueous wash compatible

XFMRS Inc	Title: INDUCTOR		
	P/N: XF151510-2R4M		REV. A
	DWN.	李小锋	Feb-20-04
	CHK.	廖玉坤	Feb-20-04
APP.		MS	Feb-20-04